


Test Report

Applicant's Name.....: Shenzhen SaiFeng Electronic Technology Co., Ltd
Address.....: Community, Ban Tin Street, LonggangDistrict, Shenzhen City, China
Manufacturer's Name.....: Shenzhen SaiFeng Electronic Technology Co., Ltd
Address.....: Community, Ban Tin Street, LonggangDistrict, Shenzhen City, China

Product Description

Product Name.....: TWS True Wireless Earbuds
Model Name.....: SE60, SE-ONE, TWS-SE
Trademark.....: /
Model difference.....: SE60 is tested model, other models are derivative models .The models are identical in circuit, only different on the model names , size and shape and color. So the test data of SE60 can represent the remaining models.
Ratings.....: Input: 5 V  1 A or DC 3.7 V power by battery
Standards.....: **ETSI EN 300 328 V2.2.2 (2019-07)**


Report Version.....: B01

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report shall not be reproduced except in full, without prior written approval of Promise. This document may be altered or revised by Promise, personnel only, and shall be noted in the revision of the document.

Date of Test : Nov. 27, 2024
Date (s) of Performance of Tests : Nov. 27, 2024 to Dec. 04, 2024
Date of Issue : Dec. 04, 2024
Test Result : Pass

Prepared By : 

(Wanna)

Reviewed by : 

(Chopin Xiao)

Approved by : 

(Kind Yang)

Table of Contents

- 1. Revision History 4
- 2. Test Summary 5
- 3. Product Information And Test Setup 6
 - 3.1. Product Information 6
 - 3.2. Test Setup Configuration 6
 - 3.3. Support Equipment 6
 - 3.4. Channel List 7
 - 3.5. Test Mode 7
 - 3.6. Test Environment 7
- 4. Test Facility And Test Instrument Used 8
 - 4.1. Test Facility 8
 - 4.2. Test Instrument Used 8
 - 4.3. MAXIMUM MEASUREMENT UNCERTAINTY 9
- 5. RF Output Power 10
 - 5.1. Block Diagram Of Test Setup10
 - 5.2. Limit10
 - 5.3. Test procedure10
 - 5.4. Test Result 12
- 6. Power Spectral Density 16
 - 6.1. Block Diagram Of Test Setup16
 - 6.2. Limit16
 - 6.3. Test procedure16
 - 6.4. Test Result 18
- 7. Adaptivity22
 - 7.1. Block Diagram Of Test Setup22
 - 7.2. Limit22
 - 7.3. Test procedure23
 - 7.4. Test Result 24
- 8. Occupied Channel Bandwidth 25
 - 8.1. Block Diagram Of Test Setup25
 - 8.2. Limit25
 - 8.3. Test procedure25
 - 8.4. Test Result 26
- 9. Transmitter Unwanted Emissions In The Out-of-band Domain 30
 - 9.1. Block Diagram Of Test Setup30
 - 9.2. Limit30
 - 9.3. Test procedure30
 - 9.4. Test Result 33
- 10. Transmitter Unwanted Emissions In The Spurious Domain 35
 - 10.1. Block Diagram Of Test Setup 35
 - 10.2. Limits35
 - 10.3. Test Procedure 36
 - 10.4. Test Results 37
- 11. Receiver Spurious Emissions 38

11.1. Block Diagram Of Test Setup	38
11.2. Limits	38
11.3. Test Procedure	38
11.4. Test Results	40
12. Receiver Blocking	41
12.1. Block Diagram Of Test Setup	41
12.2. Limit	41
12.3. Test procedure	42
12.4. Test Result	43
13. EUT Photographs	44

1. Revision History

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 04, 2024	Valid	Original Report


2. Test Summary

The Product has been tested according to the following specifications:

Standard	ETSI EN 300 328 V2.2.2		
Test Item	Test Requirement	Test Method	Results
Transmitter Parameters			
RF Output Power	Clause 4.3.1.2	Clause 5.4.2	PASS
Power Spectral Density	Clause 4.3.2.3	Clause 5.4.3	PASS
Duty cycle, Tx-Sequence, Tx-gap	Clause 4.3.1.3	Clause 5.4.2	N/A ²
Accumulated Transmit time, Frequency Occupation & Hopping Sequence	Clause 4.3.1.4	Clause 5.4.4	N/A ¹
Hopping Frequency Separation	Clause 4.3.1.5	Clause 5.4.5	N/A ¹
Medium Utilization	Clause 4.3.1.6	Clause 5.4.2	N/A ²
Adaptivity	Clause 4.3.1.7	Clause 5.4.6	N/A ³
Occupied Channel Bandwidth	Clause 4.3.1.8	Clause 5.4.7	PASS
Transmitter unwanted emissions in the OOB domain	Clause 4.3.1.9	Clause 5.4.8	PASS
Transmitter unwanted emissions in the spurious domain	Clause 4.3.1.10	Clause 5.4.9	PASS
Receiver Parameters			
Receiver spurious emissions	Clause 4.3.1.11	Clause 5.4.10	PASS
Receiver Blocking	Clause 4.3.1.12	Clause 5.4.11	PASS
Geo-location capability	Clause 4.3.1.13	Clause 5.4.12	N/A ⁴
<p>Remark:</p> <p>N/A¹: Only for equipment using wide band modulations other than FHSS</p> <p>N/A²: Only for non-Adaptive equipment.</p> <p>N/A³:The maximum output power of EUT less than 10dBm, so not applicable</p> <p>N/A⁴: Only for equipment with geo-location capability</p> <p>Tx: In this whole report Tx (or tx) means Transmitter.</p> <p>Rx: In this whole report Rx (or rx) means Receiver.</p> <p>RF: In this whole report RF means Radiated Frequency.</p> <p>CH:In this whole report CH means channel.</p>			

3. Product Information And Test Setup

3.1. Product Information

EUT Name	:	TWS True Wireless Earbuds
Test Model No.	:	SE60
Power supply	:	Input: 5 V  1 A or DC 3.7 V power by battery
Operation frequency	:	2402MHz-2480MHz, 40 Channels
Modulation	:	GFSK
Antenna Type	:	PCB antenna
Antenna Gain	:	0dBi
Hardware Version	:	V1.0
Software Version	:	V1.0

3.2. Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

3.3. Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3.4. Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

3.5. Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(GFSK)	2402MHz	2440MHz	2480MHz
Receiving(GFSK)	2402MHz	2440MHz	2480MHz

3.6. Test Environment

Humidity(%):	54.2
Atmospheric Pressure(kPa):	101.4
Normal Temperature(°C)	24.6
Low Temperature(°C)	-10
High Temperature(°C)	50

4. Test Facility And Test Instrument Used

4.1. Test Facility

Shenzhen Promise Test Technology Co., Ltd.

103, Building 1, Yibaolai Industrial City, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.2. Test Instrument Used

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 10, 2024	May 09, 2025
Loop antenna	EMCI	LAP600	272	May 10, 2024	May 09, 2025
Amplifier	Schwarzbeck	BBV 9743 B	00378	May 10, 2024	May 09, 2025
Amplifier	Schwarzbeck	BBV 9718 B	N/A	May 10, 2024	May 09, 2025
Bilog Antenna	Schwarzbeck	VULB9162	00498	May 28, 2024	May 27, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 16, 2024	May 15, 2025
Horn Antenna	A.H.SYSTEMS	SAS574	588	May 10, 2024	May 09, 2025
Amplifier	AEROFLEX	100KHz-40GHz	097	May 10, 2024	May 09, 2025
Spectrum Analyzer	R&S	FSV40	101413	May 10, 2024	May 09, 2025
CDN	Schwarzbeck	CDN M2+M3-16A	210313	May 10, 2024	May 09, 2025
966 Anechoic Chamber	EMToni	9m6m6m	N/A	Nov. 25, 2021	Nov. 24, 2024
Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 10, 2024	May 09, 2025
WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 10, 2024	May 09, 2025
Single Generator	Agilent	N5182A	MY48180575	May 10, 2024	May 09, 2025
Power Sensor	MWRfTest	MW100-RFCB	N/A	May 10, 2024	May 09, 2025
Single Generator	R&S	SMB100A	N/A	May 10, 2024	May 09, 2025
Power Amplifier Shielding Room	EMToni	2m3m3m	N/A	Nov. 25, 2021	Nov. 24, 2024

4.3. MAXIMUM MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


No.	Item	Uncertainty
1	AC Conducted Emission Test	±1.38dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=1.6dB
3	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.6dB
4	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.3dB
5	3m chamber Radiated spurious emission(18GHz-40GHz)	U=5.0dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

Decision Rule

- Uncertainty is not included
- Uncertainty is included

5. RF Output Power

5.1. Block Diagram Of Test Setup

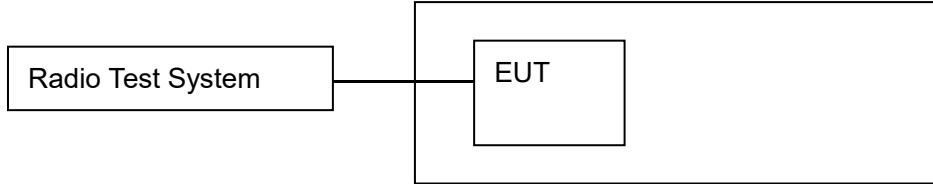

5.2. Limit

For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. See clause 5.3.1 m). For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

Limit
20dBm

5.3. Test procedure

Step 1:

- Use a fast power sensor suitable for 2.4 GHz and capable of minimum 1 MS/s.
- Use the following settings:
 - Sample speed 1 MS/s or faster.
 - The samples shall represent the RMS power of the signal.
 - Measurement duration: For non-adaptive equipment: equal to the observation period defined in clause 4.3.1.3.2 or clause 4.3.2.4.2. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.

NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

Step 2:

- For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.
- For conducted measurements on devices with multiple transmit chains:
 - Connect one power sensor to each transmit port for a synchronous measurement on all transmit ports.
 - Trigger the power sensors so that they start sampling at the same time. Make sure the time

difference between the samples of all sensors is less than 500 ns.

- For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps.

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.

The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.

NOTE 2: In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these P_{burst} values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{k} \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 5:

- The highest of all P_{burst} values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:


- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.
- If more than one antenna assembly is intended for this power setting, the maximum overall antenna gain (G or G + Y) shall be used.
- The RF Output Power (P) shall be calculated using the formula below:

$$P = A + G + Y$$


- This value, which shall comply with the limit given in clause 4.3.1.2.3 or clause 4.3.2.2.3, shall be recorded in the test report.

5.4. Test Result


Modulation	Test conditions (Temperature)	EIRP (dBm)		
		Low Channel	Middle Channel	High Channel
GFSK-1M	Normal	1.27	0.54	1.10
	Low	1.01	0.49	0.55
	High	0.09	0.04	0.14
GFSK-2M	Normal	1.11	1.02	1.25
	Low	0.97	0.35	1.24
	High	-0.01	0.62	0.55
Limit		≤100mW (20dBm)		
Remark: P = A + G + Y, G=1.58dBi, Y=0				

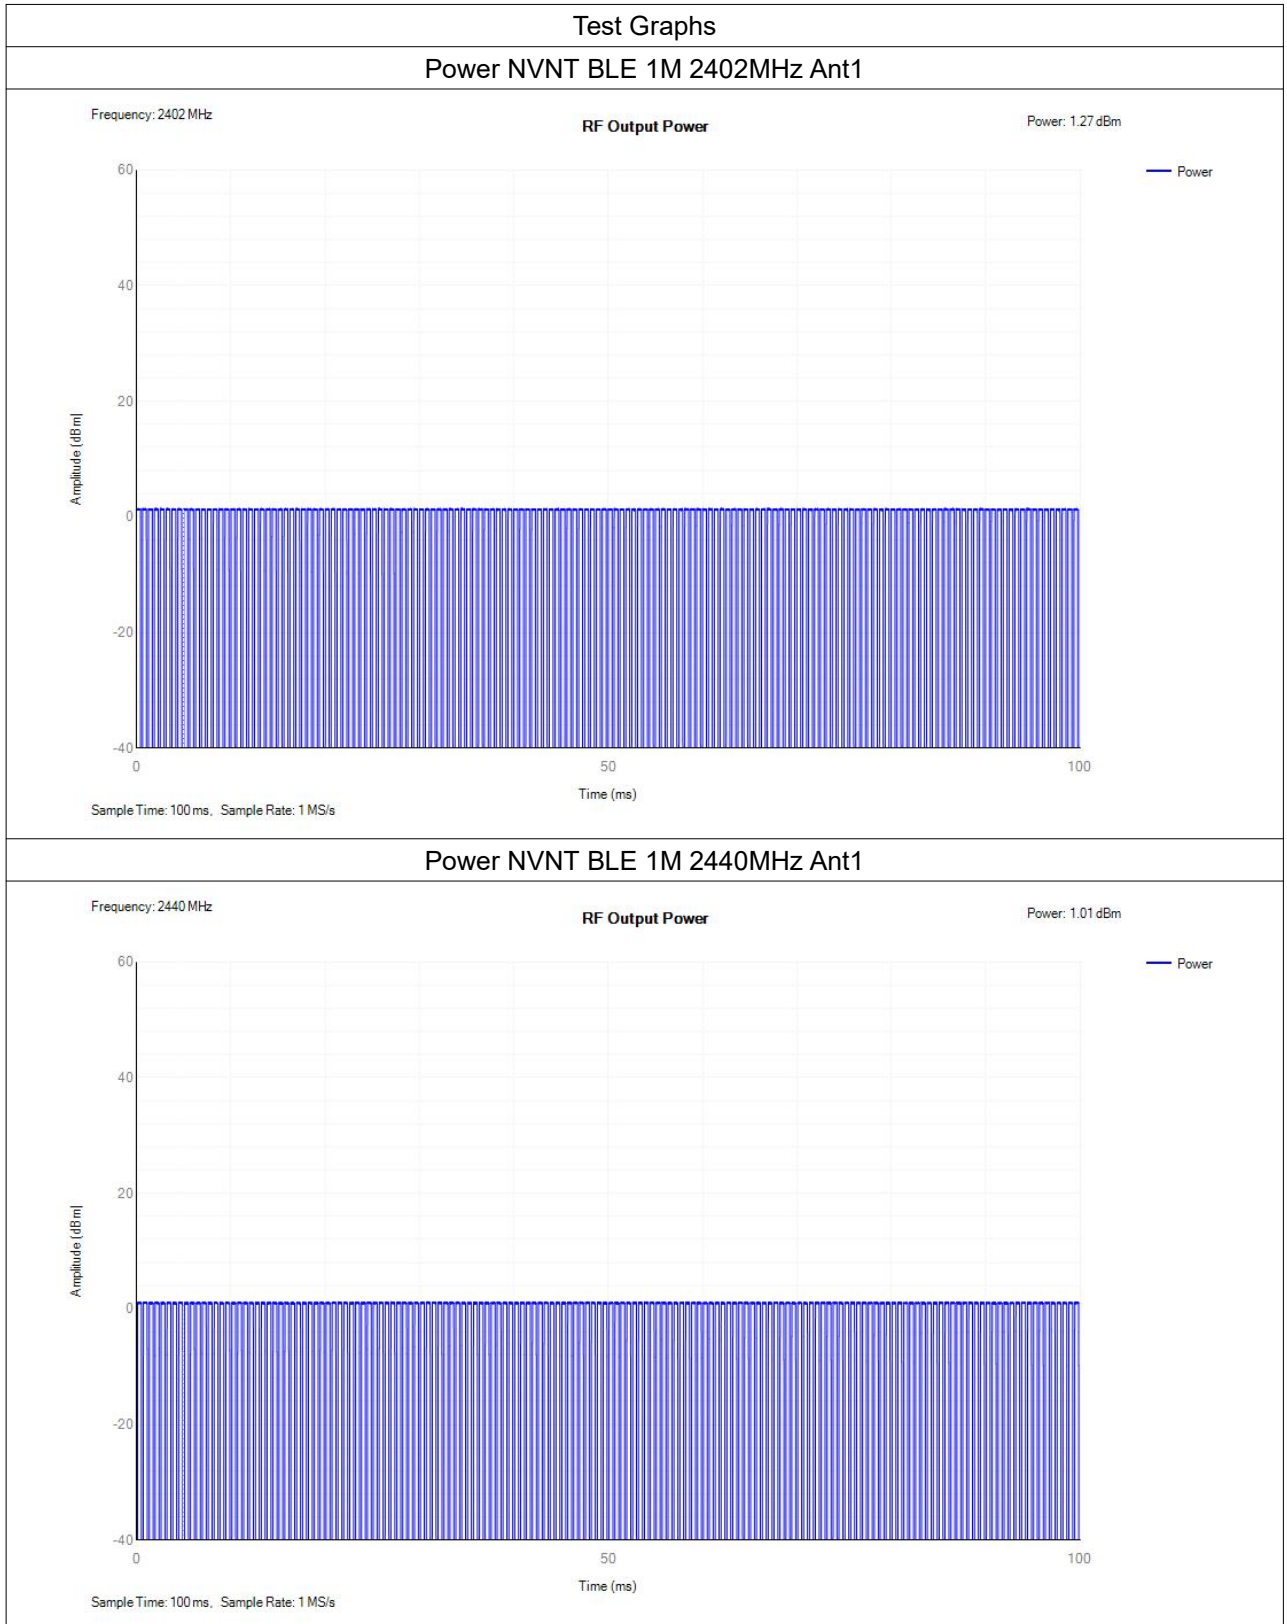


Power NVNT BLE 1M 2480MHz Ant1

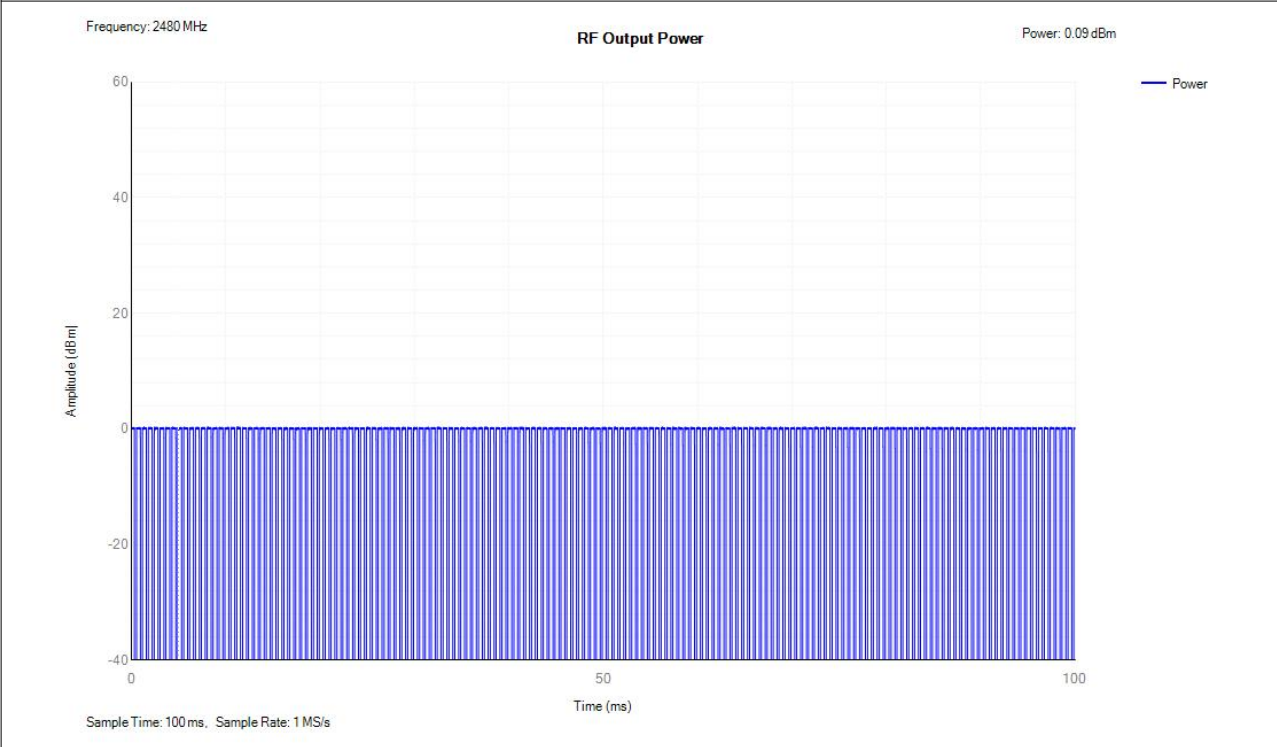


Power NVNT BLE 2M 2402MHz Ant1

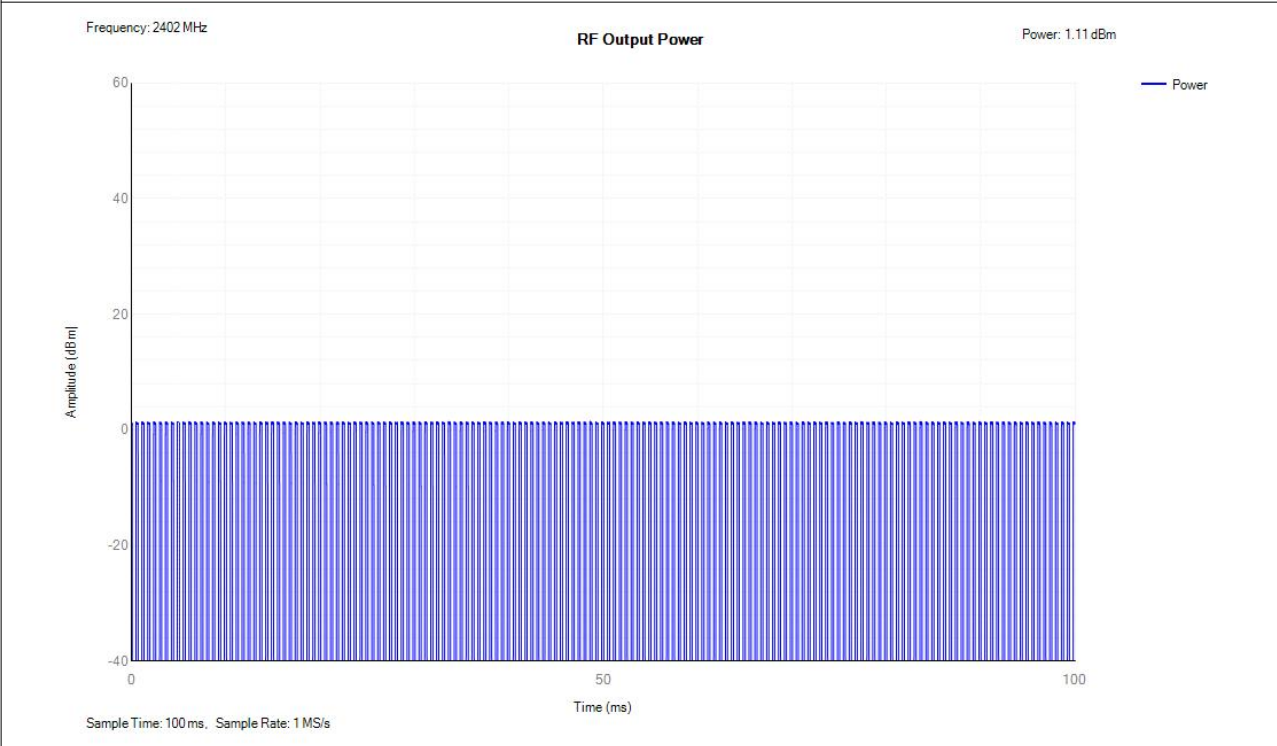

Power NVNT BLE 2M 2440MHz Ant1

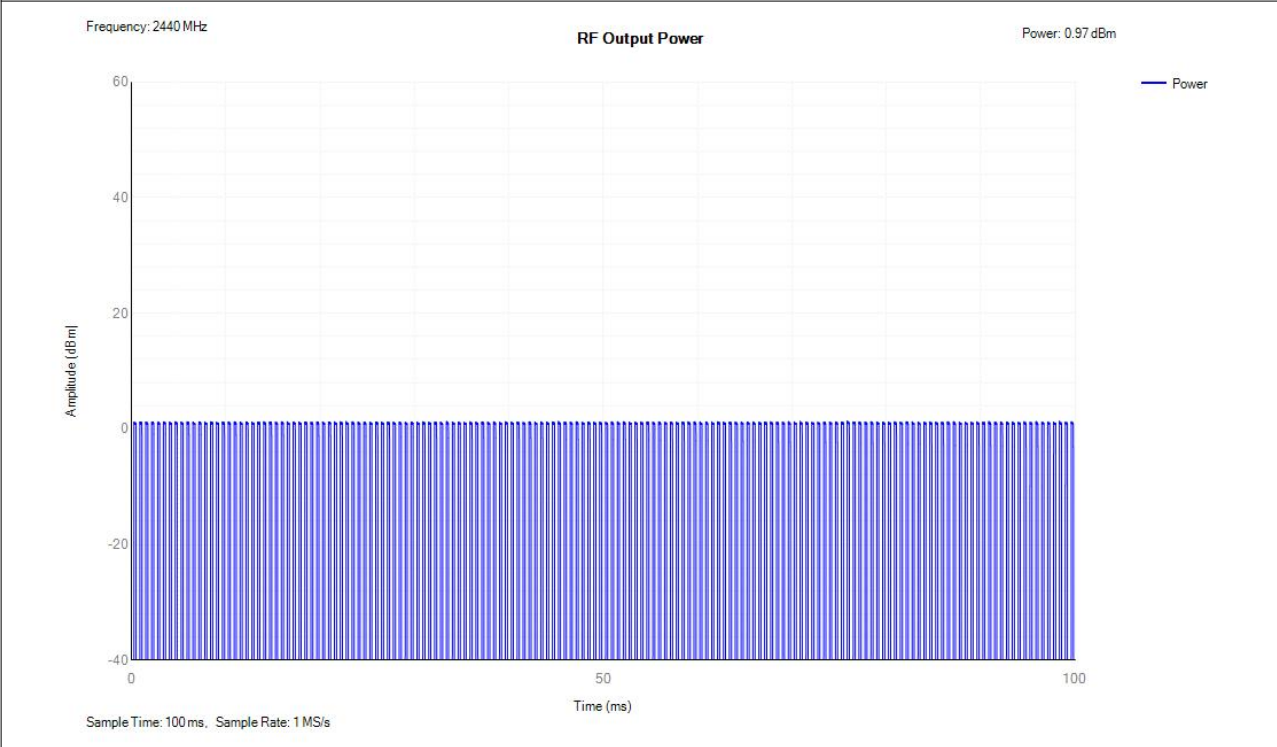


Power NVNT BLE 2M 2480MHz Ant1

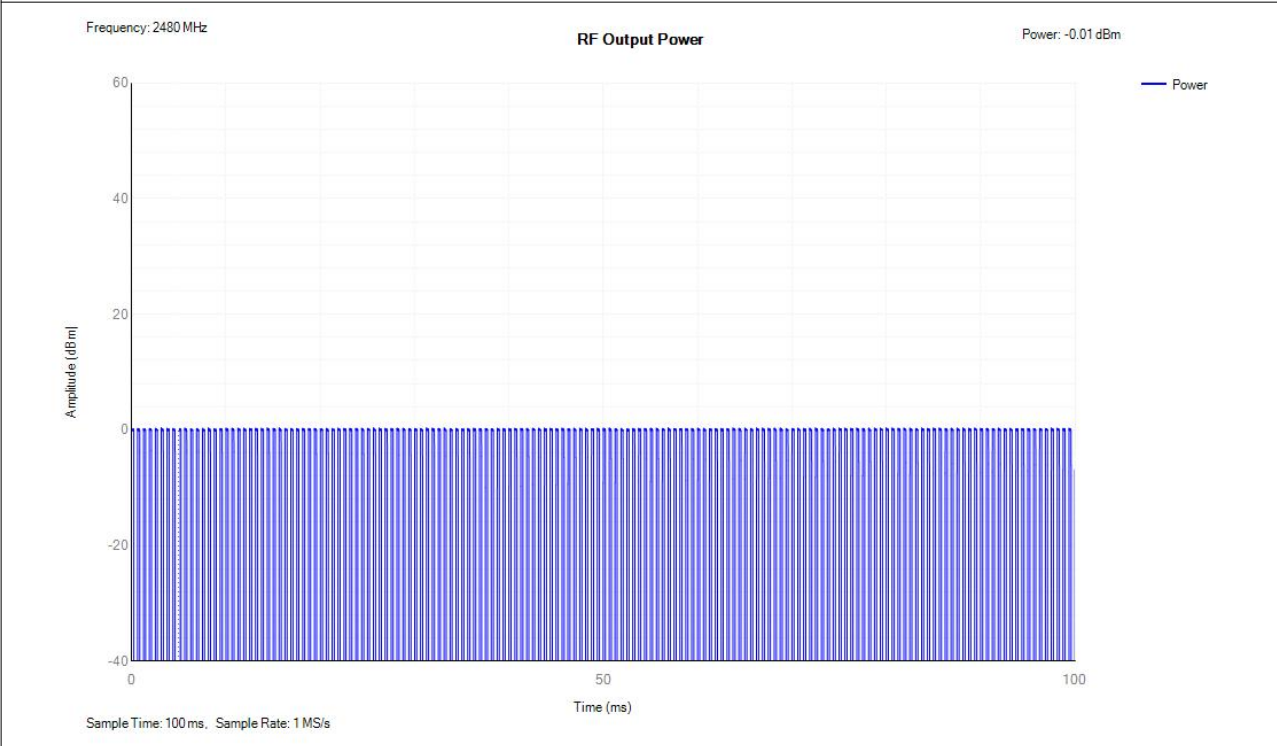

6. Power Spectral Density

6.1. Block Diagram Of Test Setup

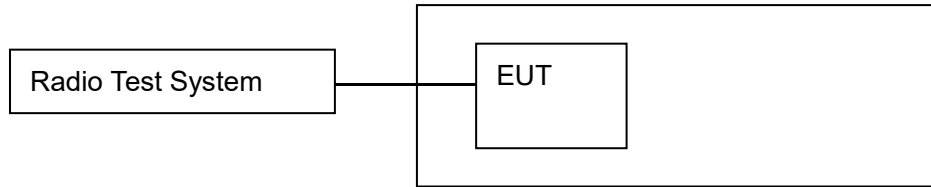

6.2. Limit

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

Limit
10dBm/MHz

6.3. Test procedure

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483,5 MHz
- Resolution BW: 10 kHz
- Video BW: 30 kHz
- Sweep Points: > 8 350

NOTE: For spectrum analysers not supporting this number of sweep points, the frequency band may be segmented.

- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: 10 s; the sweep time may be increased further until a value where the sweep time has no impact on the RMS value of the signal

For non-continuous signals, wait for the trace to stabilize.

Save the data (trace data) set to a file.

Step 2:

For conducted measurements on smart antenna systems using either operating mode 2 or operating mode 3 (see clause 5.1.3.2), repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains and use this as the new data set.

Step 3:

Add up the values for power for all the samples in the file using the formula below.

$$P_{Sum} = \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

Step 4:

Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) measured in clause 5.3.2 and save the corrected data. The following formulas can be used:

$$C_{Corr} = P_{Sum} - P_{e.i.r.p.}$$

$$P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$$

with 'n' being the actual sample number

Step 5:

Starting from the first sample $P_{Samplecorr}(n)$ (lowest frequency), add up the power (in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

Step 6:

Shift the start point of the samples added up in step 5 by one sample and repeat the procedure in step 5 (i.e. sample #2 to sample #101).


Step 7:

Repeat step 6 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments.


From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT. This value, which shall comply with the limit given in clause 4.3.2.3.3, shall be recorded in the test report.

6.4. Test Result


Modulation	Test conditions	Maximum e.i.r.p. Spectral Density (dBm/MHz)		
		Low Channel	Middle Channel	High Channel
GFSK-1M	Normal	1.22	0.96	0.04
GFSK-2M	Normal	0.2	0.05	-0.92
Limit		≤10dBm/MHz		

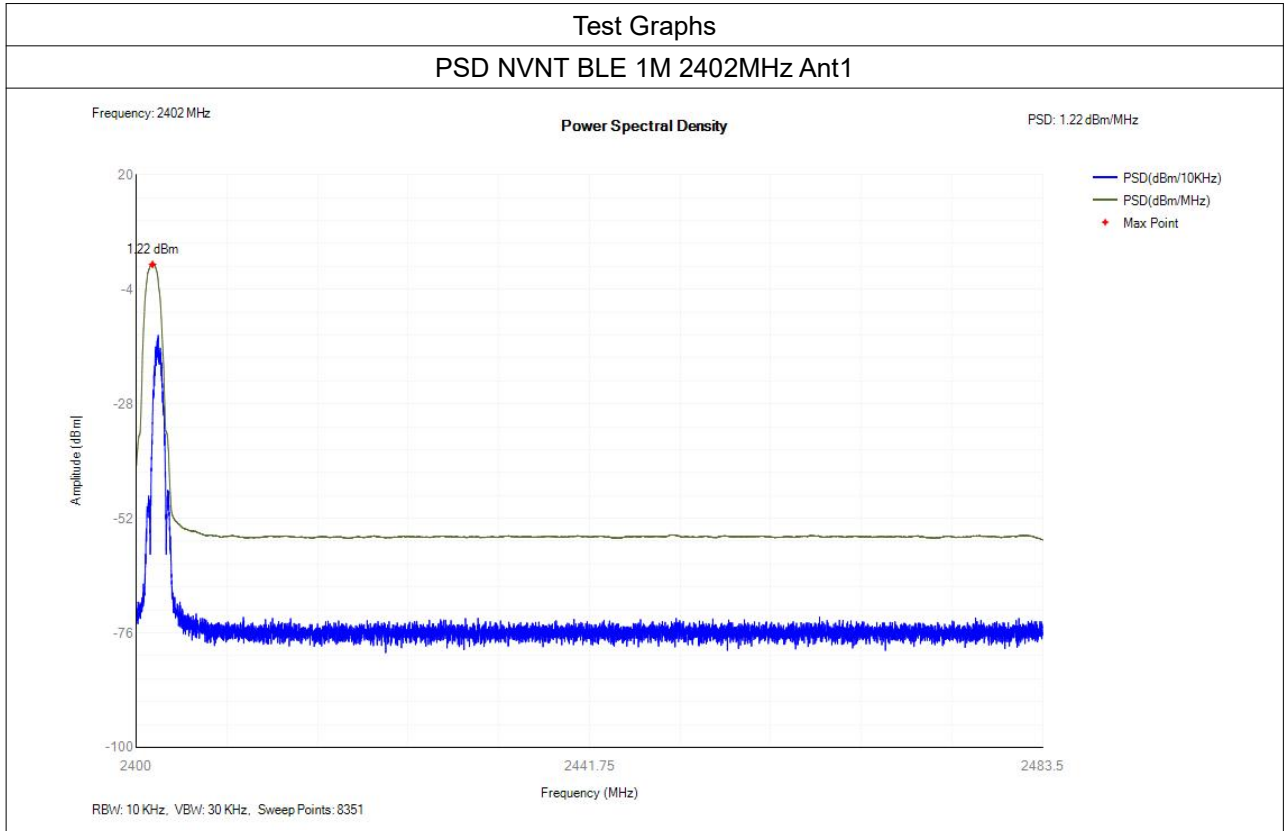


PSD NVNT BLE 1M 2440MHz Ant1

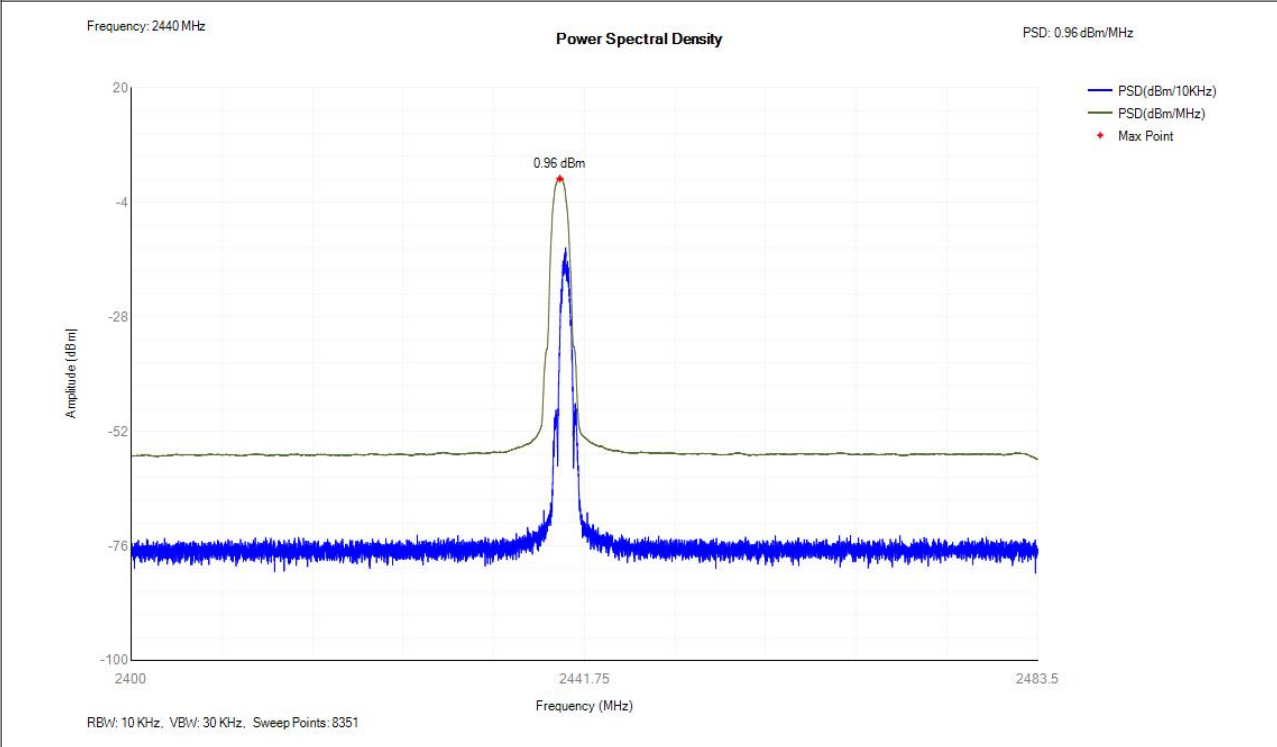


PSD NVNT BLE 1M 2480MHz Ant1

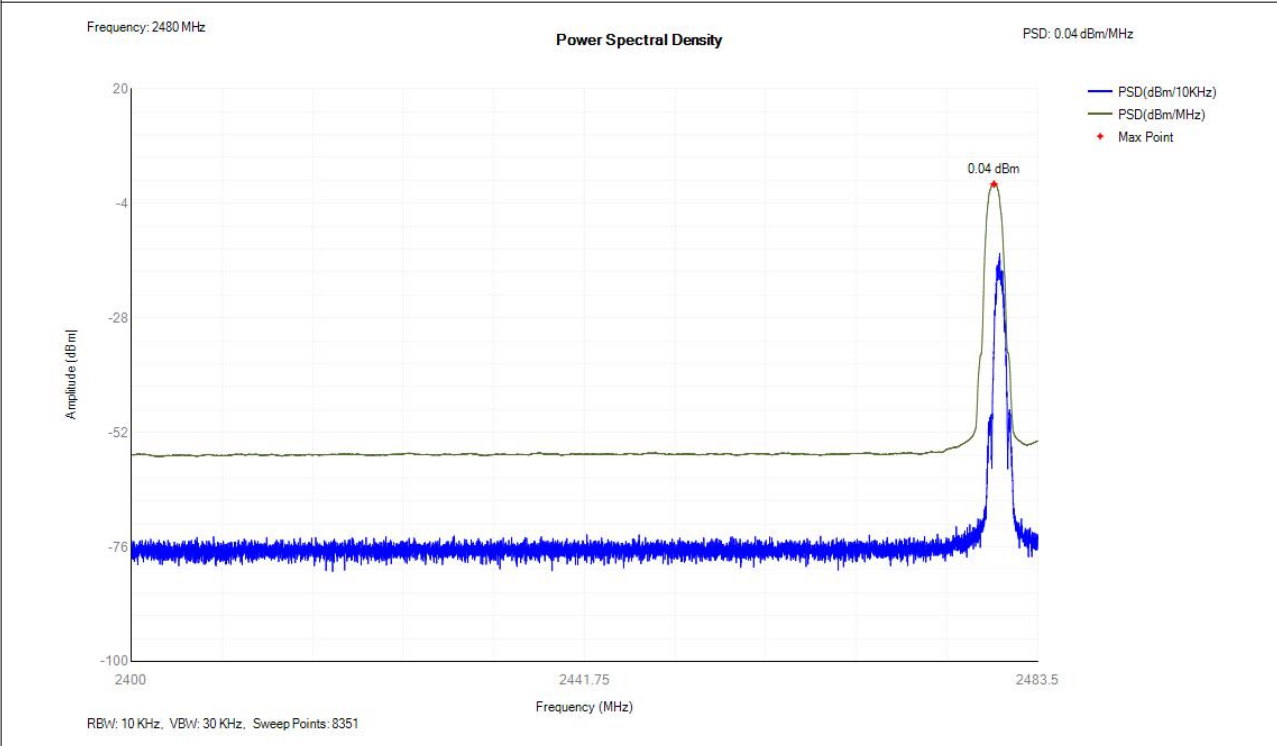


PSD NVNT BLE 2M 2402MHz Ant1

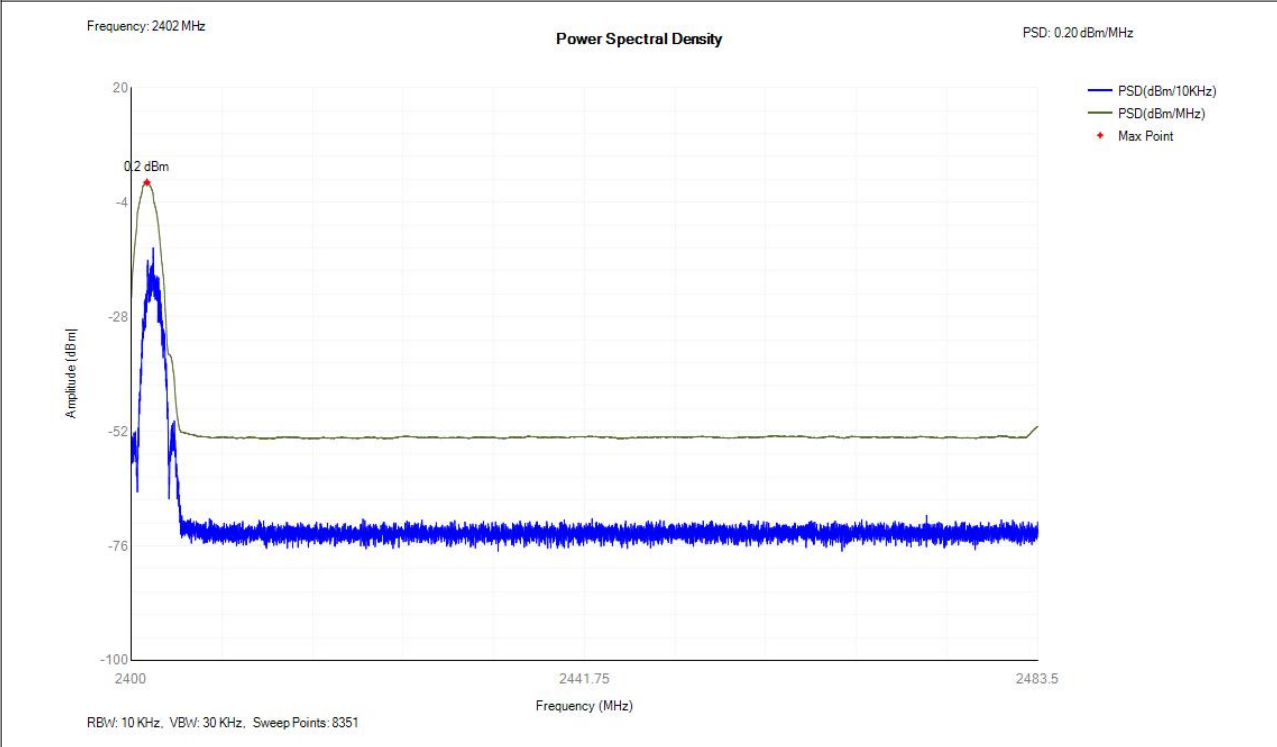


PSD NVNT BLE 2M 2440MHz Ant1

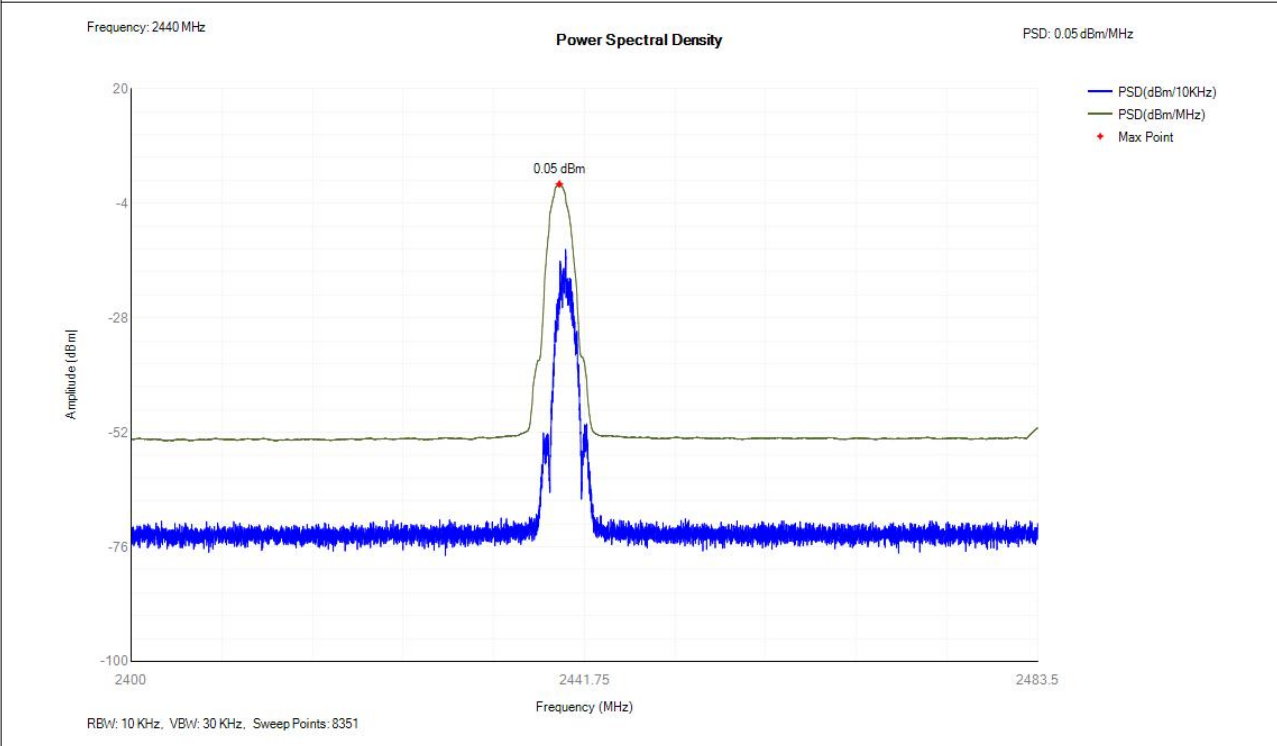

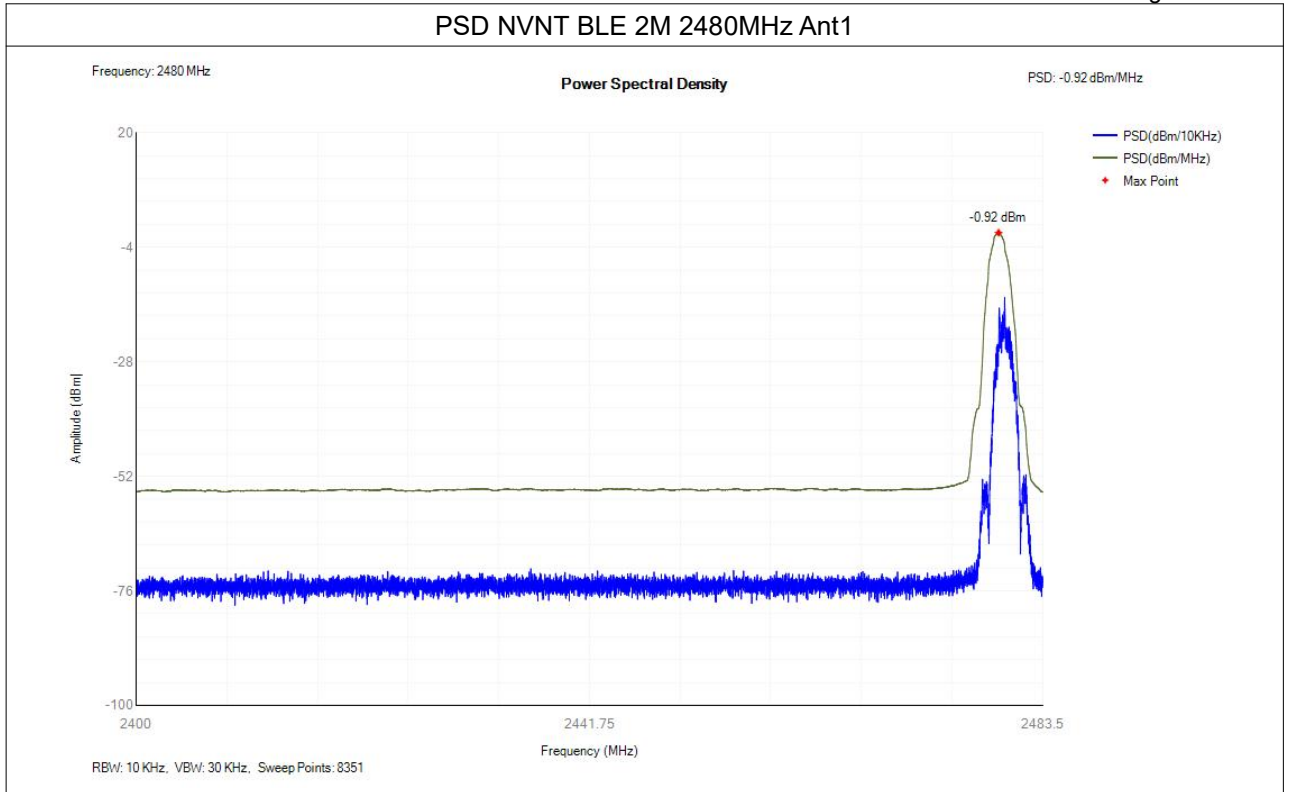

7. Adaptivity

7.1. Block Diagram Of Test Setup

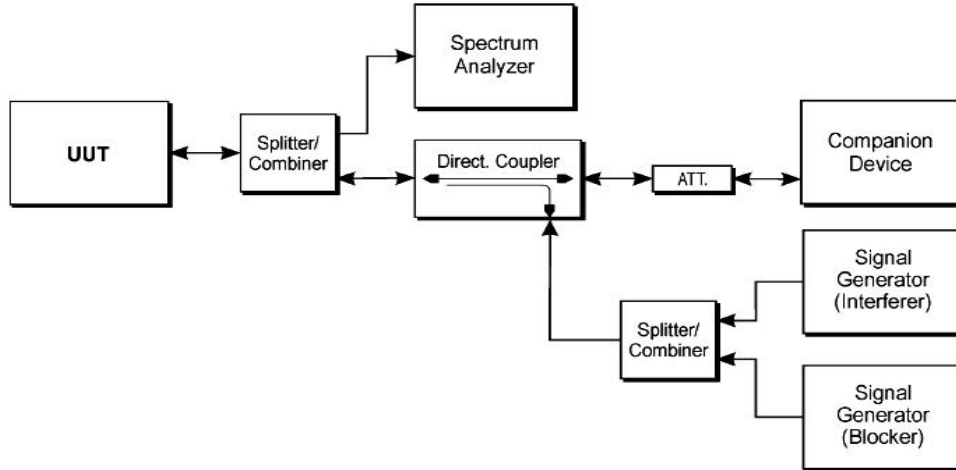

7.2. Limit

The frequency range of the equipment is determined by the lowest and highest

Non-LBT based Detect and Avoid:

- 1 The frequency shall remain unavailable for a minimum time equal to 1 second after which the channel maybe considered again as an 'available' channel;
- 2 $COT \leq 40 \text{ ms}$;
- 3 Idle Period = 5% of COT;
- 4 Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$ (P_{out} in dBm);

LBT based Detect and Avoid (Frame Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 20 us;
- 2 CCA observation time declared by the supplier;
- 3 $COT = 1 \sim 10 \text{ ms}$;
- 4 Idle Period = 5% of COT;
- 5 Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$ (P_{out} in dBm);

LBT based Detect and Avoid (Load Based Equipment):

- 1 Minimum Clear Channel Assessment (CCA) time = 20 us;
- 2 CCA declared by the manufacturer;
- 3 $COT \leq (13 / 32) * q \text{ ms}$; $q = [4 \sim 32]$; 1.625ms~13ms;
- 4 Detection threshold level = $-73\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$ (dBm);

Short Control Signaling Transmissions:

Short Control Signaling Transmissions shall have a maximum duty cycle of 10% within an observation period of 50ms.

7.3. Test procedure

Step 1:

The UUT may connect to a companion device during the test. The interference signal generator, the blocking signal generator, the spectrum analyser, the UUT and the companion device are connected using a set-up equivalent to the example given by figure 5 although the interference and blocking signal generator do not generate any signals at this point in time. The spectrum analyser is used to monitor the transmissions of the UUT in response to the interfering and the blocking signals.

Adjust the received signal level (wanted signal from the companion device) at the UUT to the value defined in table 6

The analyzer shall be set as follows:

- RBW: \geq Occupied Channel Bandwidth (if the analyser does not support this setting, the highest available setting shall be used)
- VBW: $3 \times$ RBW (if the analyser does not support this setting, the highest available setting shall be used)
- Detector Mode: RMS
- Centre Frequency: Equal to the centre frequency of the operating channel
- Span: 0 Hz
- Sweep time: $>$ Channel Occupancy Time of the UUT
- Trace Mode: Clear/Write
- Trigger Mode: Video

Step 2:

Configure the UUT for normal transmissions with a sufficiently high payload to allow demonstration of compliance of the adaptive mechanism on the channel being tested

Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that the UUT complies with the maximum Channel Occupancy Time and minimum Idle Period

Step 3: Adding the interference signal

A 100 % duty cycle interference signal is injected on the current operating channel of the UUT. This interference signal shall be a band limited noise signal which has a flat power spectral density, and shall have a bandwidth greater than the Occupied Channel Bandwidth of the UUT. The maximum ripple of this interfering signal shall be $\pm 1,5$ dB within the Occupied Channel Bandwidth and the power spectral density.

Step 4: Verification of reaction to the interference signal

The spectrum analyser shall be used to monitor the transmissions of the UUT on the selected operating channel with the interfering signal injected. This may require the spectrum analyser sweep to be triggered by the start of the interfering signal.

Using the procedure defined in clause 5.3.7.2.1.4, it shall be verified that:

The UUT shall stop transmissions on the current operating channel being tested.

Apart from Short Control Signaling Transmissions (see iii) below), there shall be no subsequent transmissions on this operating channel for a (silent) period defined in clause 4.3.2.5.1.2 step 2. After that, the UUT may have normal transmissions again for the duration of a single Channel Occupancy Time period. Because the interference signal is still present, another silent period as defined in clause 4.3.2.5.1.2 step 2 needs to be included. This sequence is repeated as long as the interfering signal is present.

The UUT may continue to have Short Control Signaling Transmissions on the operating channel while the interference signal is present. These transmissions shall comply with the limits

Alternatively, the equipment may switch to a non-adaptive mode

Step 5: Adding the blocking signal

With the interfering signal present, a 100 % duty cycle CW signal is inserted as the blocking signal

Repeat step 4 to verify that the UUT does not resume any normal transmissions

Step 6: Removing the interference and blocking signal

On removal of the interference and blocking signal the UUT is allowed to start transmissions again on this channel however, it shall be verified that this shall only be done after the period defined in clause 4.3.2.5.1.2 step 2.

Step 7:


The steps 2 to 6 shall be repeated for each of the frequencies to be tested.

7.4. Test Result

Remark: this requirement does not apply for equipment when operating in a mode where the RF Output power is less than 10 dBm e.i.r.p.

8. Occupied Channel Bandwidth

8.1. Block Diagram Of Test Setup

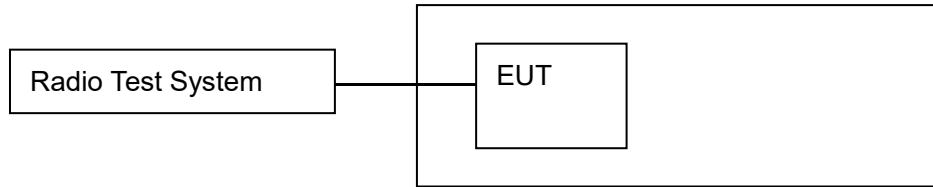

8.2. Limit

The Occupied Channel Bandwidth shall fall completely within the band given in 2.4GHz to 2.4835GHz. In addition, for non-adaptive systems using wide band modulations other than FHSS and with e.i.r.p greater than 10 dBm, the occupied channel bandwidth shall be less than 20 MHz.

8.3. Test procedure

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 %
- Video BW: 3 × RBW
- Frequency Span: 2 × Nominal Channel Bandwidth
- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep time: 1 s

Step 2:

Wait for the trace to stabilize.

Find the peak value of the trace and place the analyser marker on this peak.

Step 3:


Use the 99 % bandwidth function of the spectrum analyser to measure the Occupied Channel Bandwidth of the UUT.

This value shall be recorded.


NOTE: Make sure that the power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals left and right from the power envelope being taken into account by this measurement.

8.4. Test Result


Modulation	Frequency (MHz)	Frequency Range (MHz)		Occupied Channel (MHz)
GFSK-1M	Low	2401.511	2402.522	1.012
	Middle	2439.51	2440.521	1.011
	High	2479.51	2480.522	1.012
GFSK-2M	Low	2401.031	2403.015	1.985
	Middle	2439.031	2441.016	1.985
	High	2479.03	2481.014	1.985

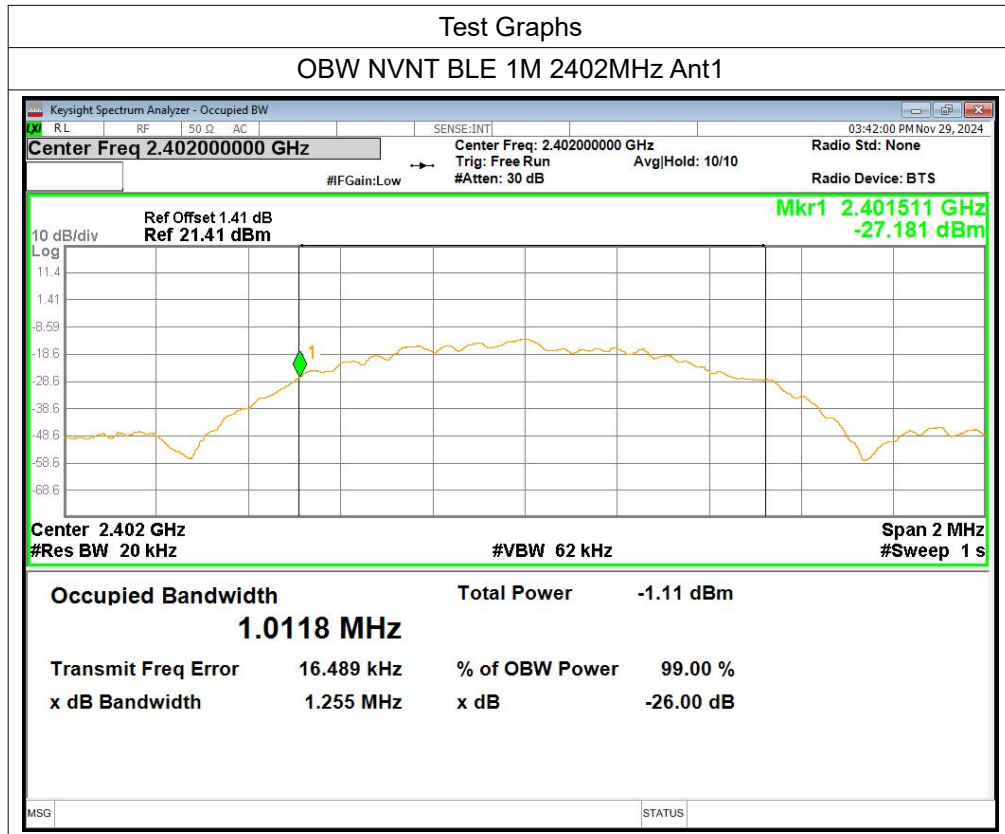


OBW NVNT BLE 1M 2440MHz Ant1

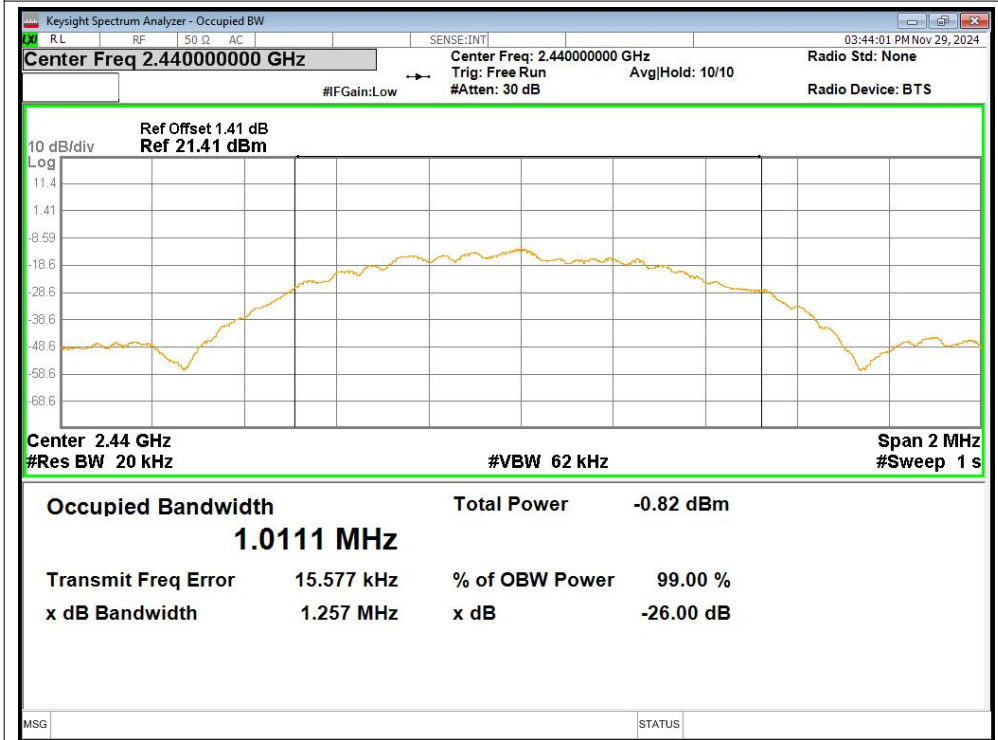


OBW NVNT BLE 1M 2480MHz Ant1

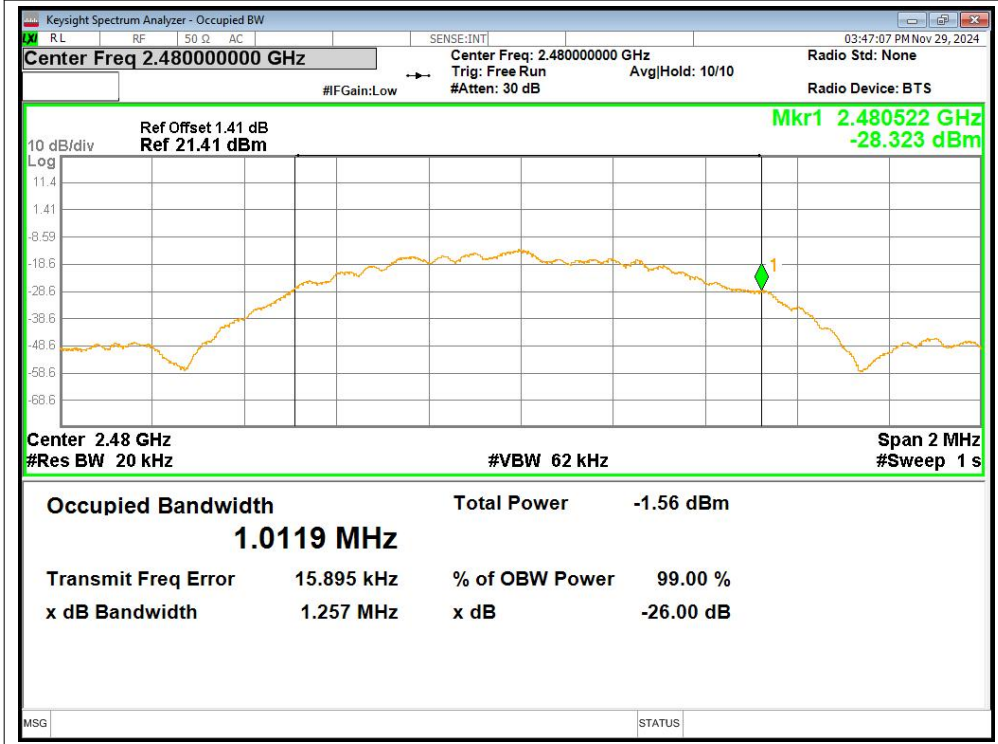


OBW NVNT BLE 2M 2402MHz Ant1

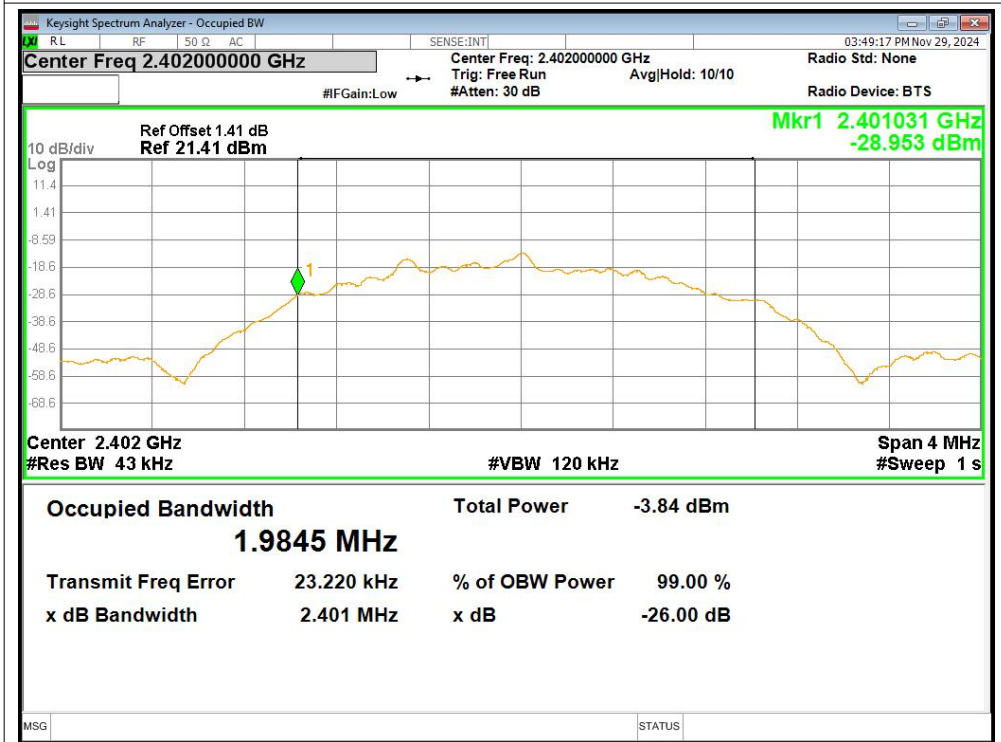


OBW NVNT BLE 2M 2440MHz Ant1

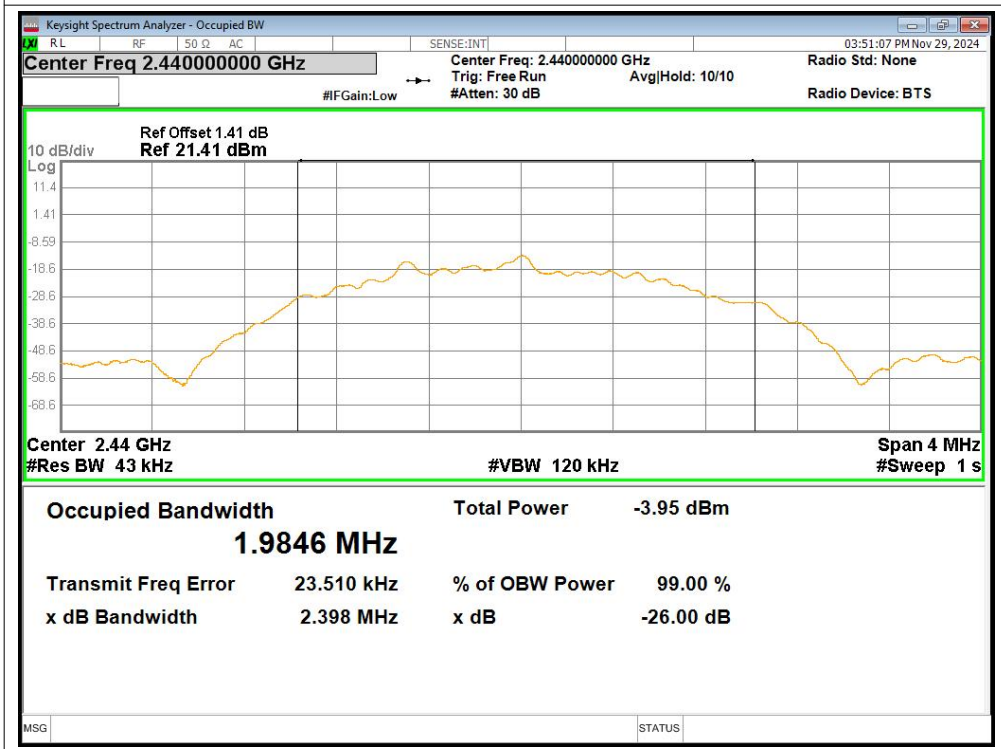

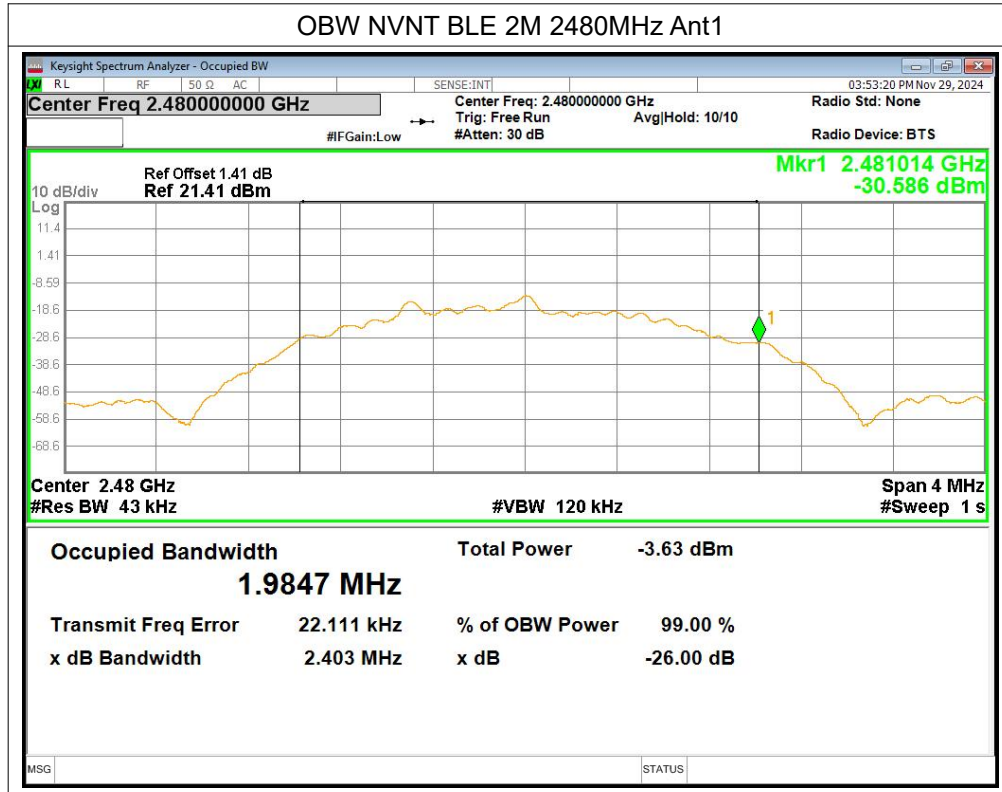

9. Transmitter Unwanted Emissions In The Out-of-band Domain

9.1. Block Diagram Of Test Setup

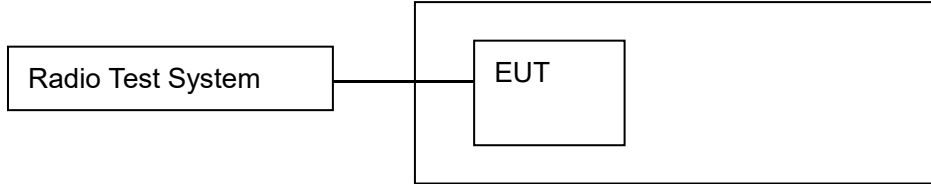

9.2. Limit

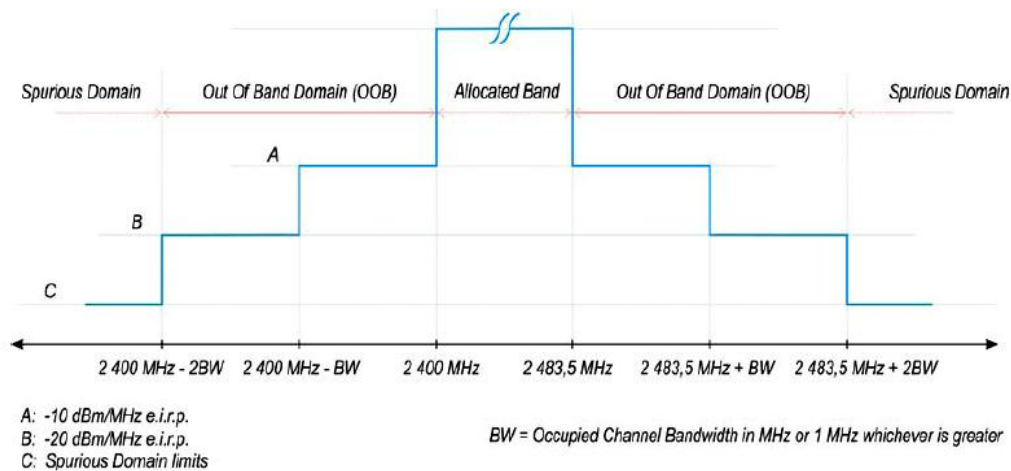


Figure 3: Transmit mask

9.3. Test procedure

The applicable mask is defined by the measurement results from the tests performed under clause 5.3.8 (Occupied Channel Bandwidth).

The test procedure is further as described under clause 5.3.9.2.1.

The Out-of-band emissions within the different horizontal segments of the mask provided in figures 1 and 3 shall be measured using the steps below. This method assumes the spectrum analyser is equipped with the Time Domain Power option.

Step 1:

- Connect the UUT to the spectrum analyser and use the following settings:
 - Centre Frequency: 2 484 MHz
 - Span: 0 Hz
 - Resolution BW: 1 MHz
 - Filter mode: Channel filter

- Video BW: 3 MHz

- Detector Mode: RMS
- Trace Mode: Max Hold
- Sweep Mode: Continuous
- Sweep Points: Sweep Time [s] / (1 μ s) or 5 000 whichever is greater
- Trigger Mode: Video trigger

NOTE 1: In case video triggering is not possible, an external trigger source may be used.

- Sweep Time: > 120 % of the duration of the longest burst detected during the measurement of the RF Output Power

Step 2 (segment 2 483,5 MHz to 2 483,5 MHz + BW):

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3 (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW):

- Change the centre frequency of the analyser to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 4 (segment 2 400 MHz - BW to 2 400 MHz):

- Change the centre frequency of the analyser to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 5 (segment 2 400 MHz - 2BW to 2 400 MHz - BW):

- Change the centre frequency of the analyser to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 6:

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits

provided by the mask given in figure 1 or figure 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.

- In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:

- Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figure 1 or figure 3.

- Option 2: the limits provided by the mask given in figure 1 or figure 3 shall be reduced by

$10 \times \log_{10}(A_{ch})$ and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.


NOTE 2: A_{ch} refers to the number of active transmit chains.

It shall be recorded whether the equipment complies with the mask provided in figure 1 or figure 3.

9.4. Test Result


CH Low (Normal Temp)

Test Freq (MHz)	Antenna	Freq(MHz)	Level	Limit
2402	Antenna 1	2399.5	-55.63	-10
2402	Antenna 1	2399.488	-55.47	-10

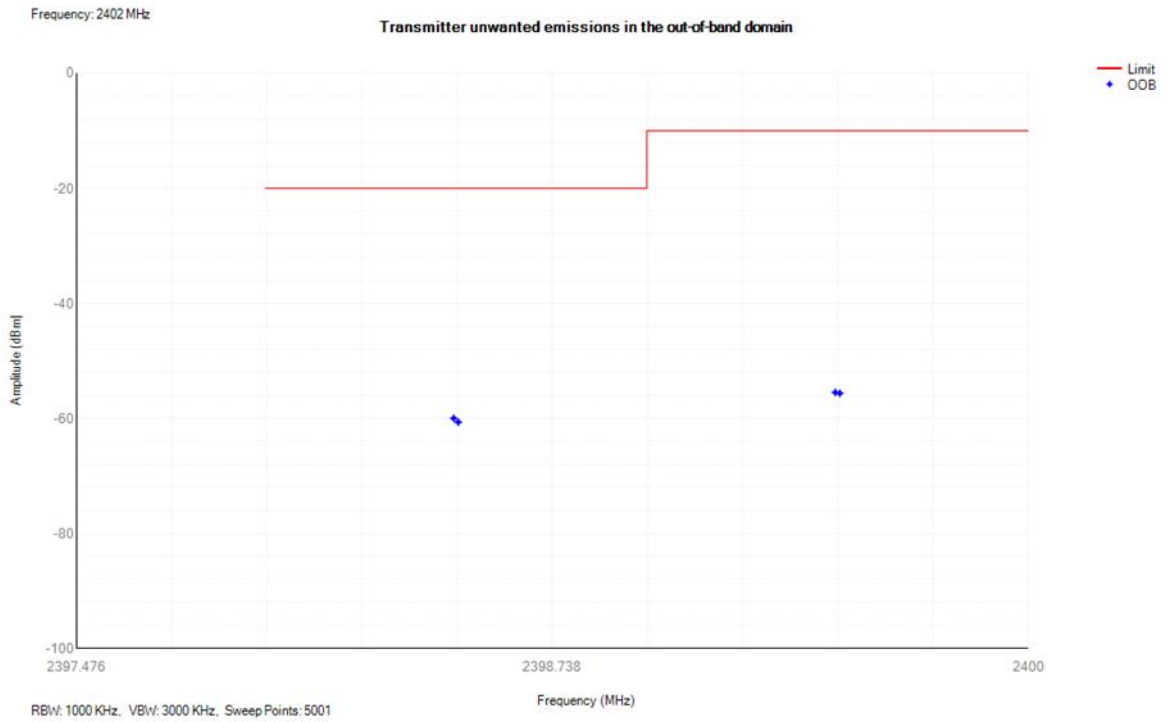


CH High (Normal Temp)

Test Freq (MHz)	Antenna	Freq(MHz)	Level	Limit
2480	Antenna 1	2484	-61.32	-10
2480	Antenna 1	2484.012	-62.3	-10

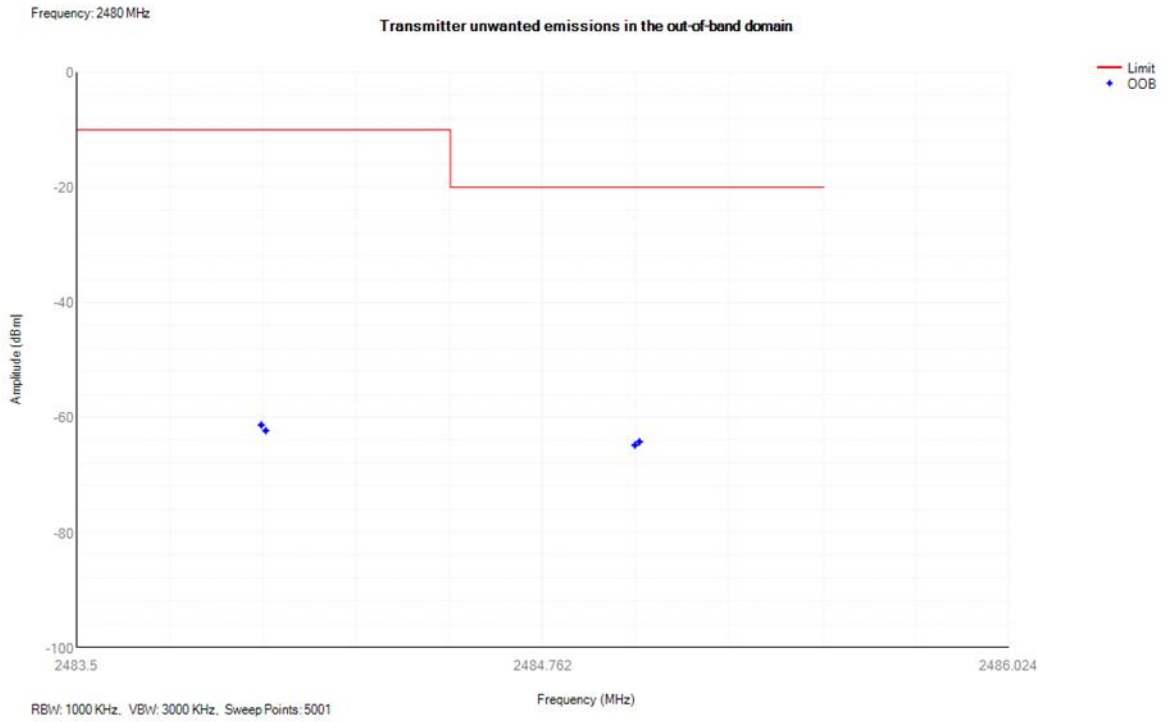

10. Transmitter Unwanted Emissions In The Spurious Domain

10.1. Block Diagram Of Test Setup

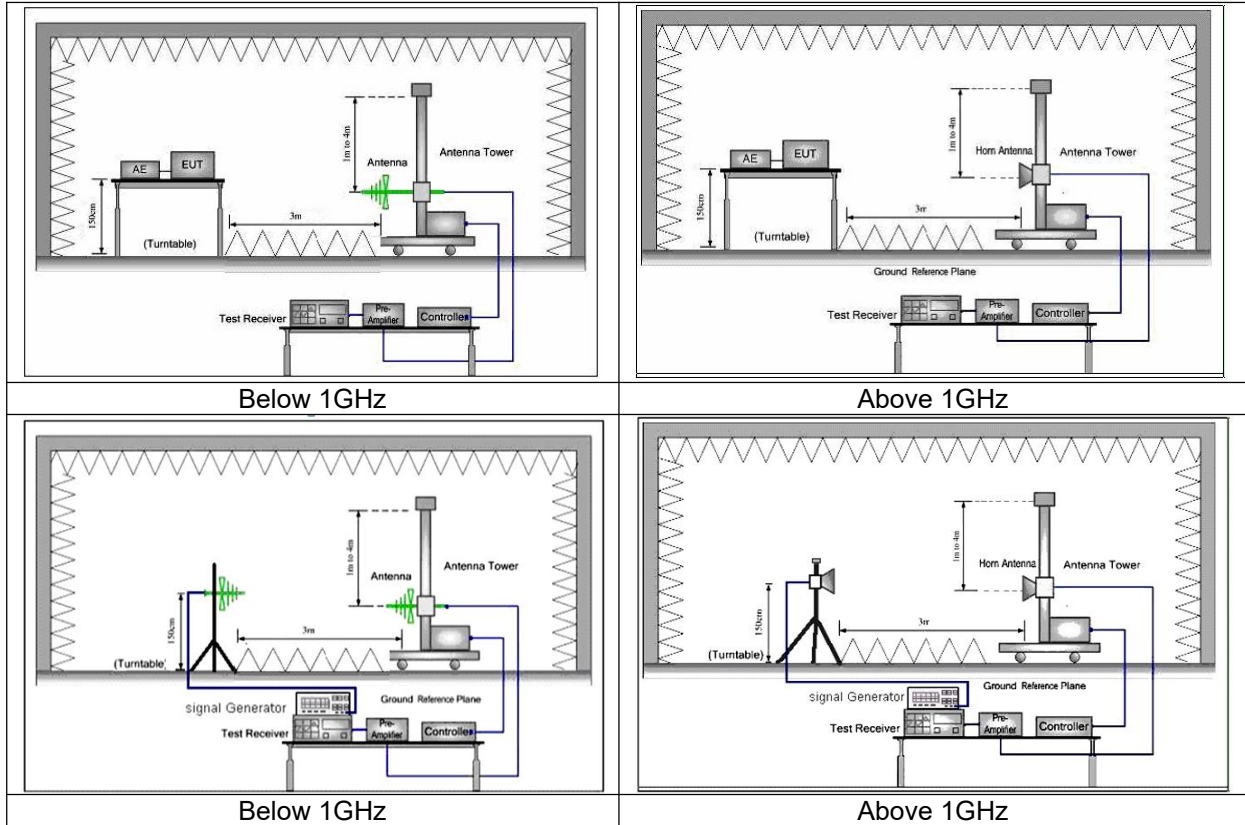

10.2. Limits

Frequency range	Maximum power, e.r.p. (≤ 1 GHz) e.i.r.p. (> 1 GHz)	RBW/VBW
30 MHz to 47 MHz	-36 dBm	100 kHz/300KHz
47 MHz to 74 MHz	-54 dBm	100 kHz/300KHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz/300KHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz/300KHz
118 MHz to 174 MHz	-36 dBm	100 kHz/300KHz
174 MHz to 230 MHz	-54 dBm	100 kHz/300KHz
230 MHz to 470 MHz	-36 dBm	100 kHz/300KHz
470 MHz to 694 MHz	-54 dBm	100 kHz/300KHz
694 MHz to 1 GHz	-36 dBm	100 kHz/300KHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz/3MHz

10.3. Test Procedure

1. Scan from 30MHz to 12.75GHz, find the maximum radiation frequency to measure.
2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.

Test procedure as below:

- 1) The EUT was powered ON and placed on a 1.5m high table at a 3 meter fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- 2) The EUT was set 3 meters (above 18GHz the distance is 1 meter) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.
- 7) The output power into the substitution antenna was then measured.
- 8) Steps 6) and 7) were repeated with both antennas polarized.
- 9) Calculate power in dBm by the following formula:
$$\text{ERP(dBm)} = P_{\text{SG}} \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$
$$\text{EIRP(dBm)} = P_{\text{SG}} \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$
$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

where:

P_{SG} is the generator output power into the substitution antenna.

- 10) Test the EUT in the lowest channel, the Highest channel

Repeat above procedures until all frequencies measured was complete.

10.4. Test Results

Frequency	Antenna Polar	Receiver Reading	Limit	Margin	Result
(MHz)	(H/V)	(dBm)	(dBm)	(dB)	
GFSK low channel					PASS
779.52	H	-52.61	-36	-16.61	
779.52	V	-50.15	-36	-14.15	
4824	H	-51.15	-30	-21.15	
4824	V	-51.65	-30	-21.65	
7236	H	-49.88	-30	-19.88	
7236	V	-50.29	-30	-20.29	
GFSK high channel					
979.32	H	-54.59	-36	-18.59	
979.32	V	-50.38	-36	-14.38	
4944	H	-54.39	-30	-24.39	
4944	V	-53.9	-30	-23.9	
7416	H	-51.24	-30	-21.24	
7416	V	-50.17	-30	-20.17	


Remark:

Absolute Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

11. Receiver Spurious Emissions

11.1. Block Diagram Of Test Setup

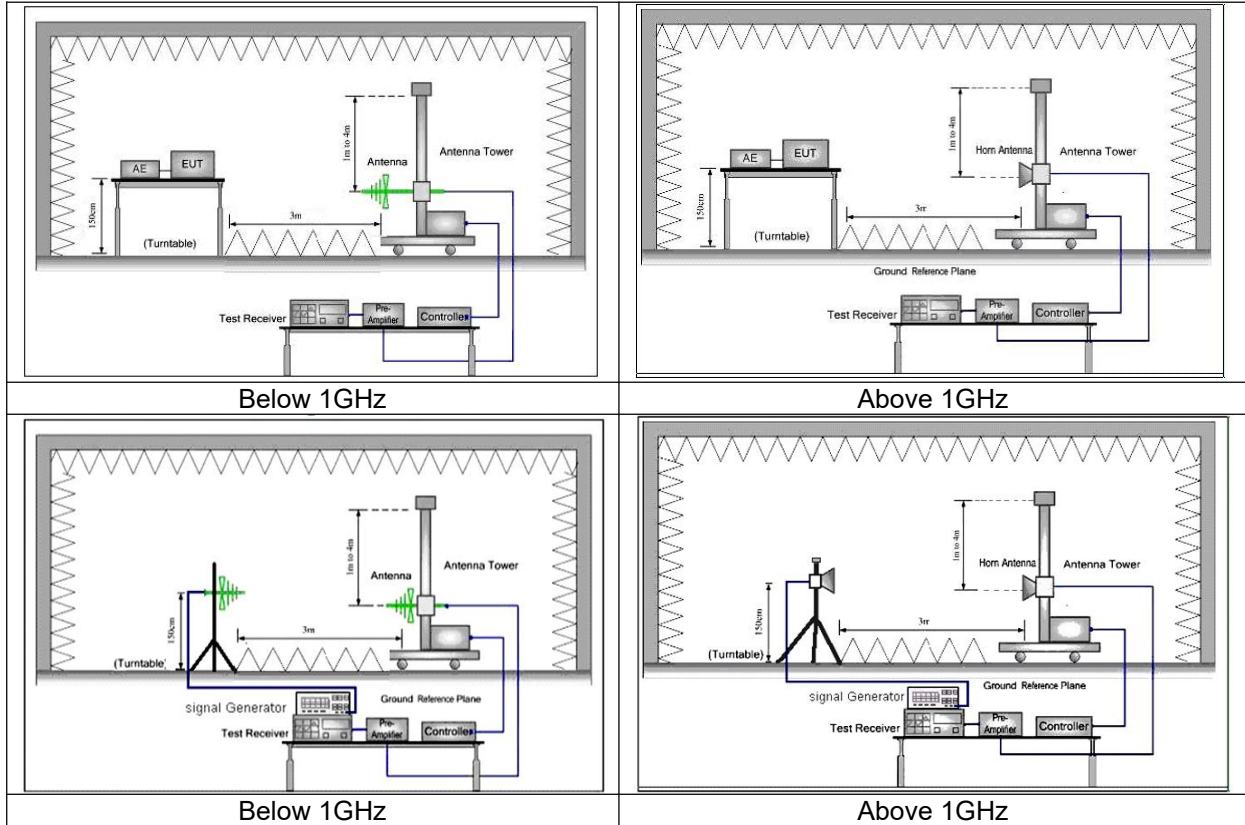

11.2. Limits

Frequency(MHz)	Limit
30-1000	-57dBm
1000-12750	-47dBm

11.3. Test Procedure

1. Scan from 30MHz to 12.75GHz, find the maximum radiation frequency to measure.
2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT. Test procedure as below:
 - 1) The EUT was powered ON and placed on a 1.5m high table at a 3 meter fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
 - 2) The EUT was set 3 meters(above 18GHz the distance is 1 meter) away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - 3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
 - 4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.

- 5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
 - 6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.
 - 7) The output power into the substitution antenna was then measured.
 - 8) Steps 6) and 7) were repeated with both antennas polarized.
 - 9) Calculate power in dBm by the following formula:
$$\text{ERP(dBm)} = P_{\text{SG}} \text{ (dBm)} - \text{cable loss (dB)}$$
$$\text{EIRP(dBm)} = P_{\text{SG}} \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$
$$\text{EIRP} = \text{ERP} + \text{antenna gain}$$
where:
 P_{SG} is the generator output power into the substitution antenna.
 - 11) Test the EUT in the lowest channel , the Highest channel
- Repeat above procedures until all frequencies measured was complete.

11.4. Test Results

Frequency	Antenna Polar	Receiver Reading	Limit	Margin	Result
(MHz)	(H/V)	(dBm)	(dBm)	(dB)	
GFSK low channel					PASS
308.22	H	-61.16	-57	-4.16	
308.22	V	-59.24	-57	-2.24	
1621.17	H	-64.35	-47	-17.35	
1621.17	V	-62.12	-47	-15.12	
GFSK high channel					
374.09	H	-61.17	-57	-4.17	
374.09	V	-59.8	-57	-2.8	
2058.69	H	-62.97	-47	-15.97	
2058.69	V	-52.84	-47	-5.84	


Remk:

Absolute Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

12. Receiver Blocking

12.1. Block Diagram Of Test Setup

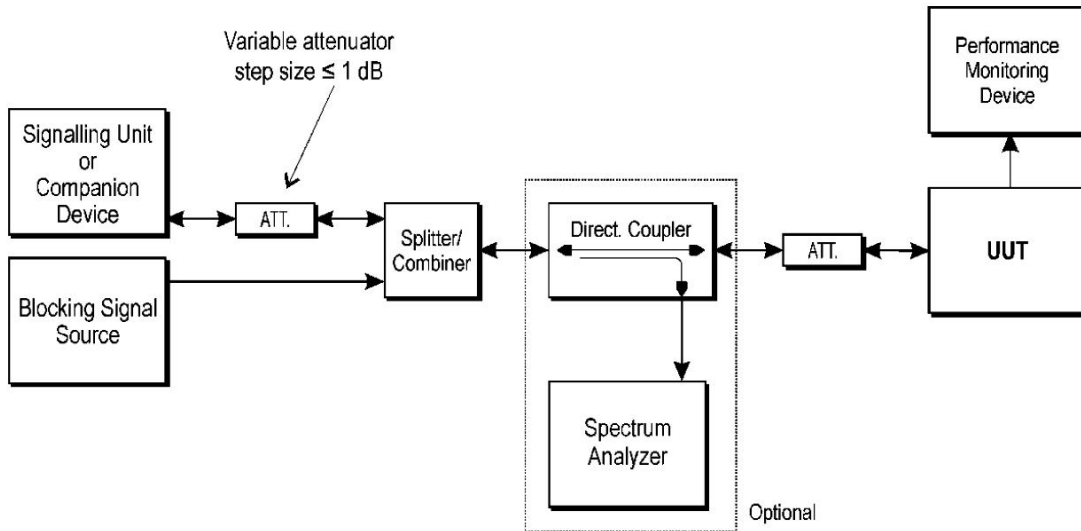

12.2. Limit

Table 14: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 20 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

Table 15: Receiver Blocking parameters receiver Category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

Table 16: Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB})$ or $(-74 \text{ dBm} + 20 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

12.3. Test procedure


Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.11.2.



12.4. Test Result



Receiver Category 2					
Mode Hopping	Wanted Power(dBm)	Blocking Frequency(MHz)	Blocking Power(dB)	Type of Blocking Signal	Performance Criteria
GFSK	-65.62	2380	-34	CW	Compliance
GFSK	-65.62	2504	-34	CW	Compliance
GFSK	-65.62	2300	-34	CW	Compliance
GFSK	-65.62	2584	-34	CW	Compliance



13. EUT Photographs





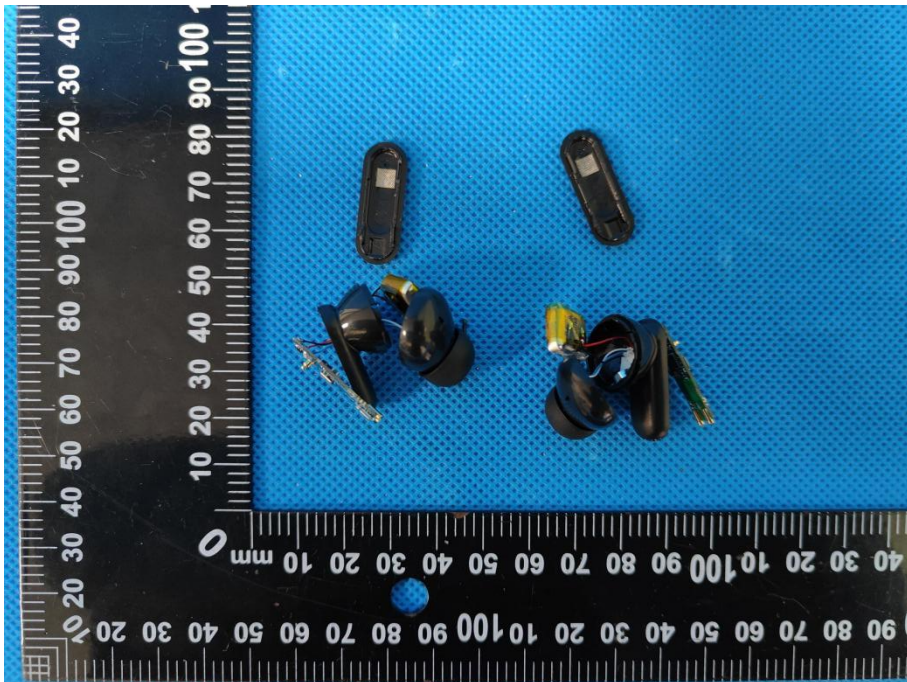


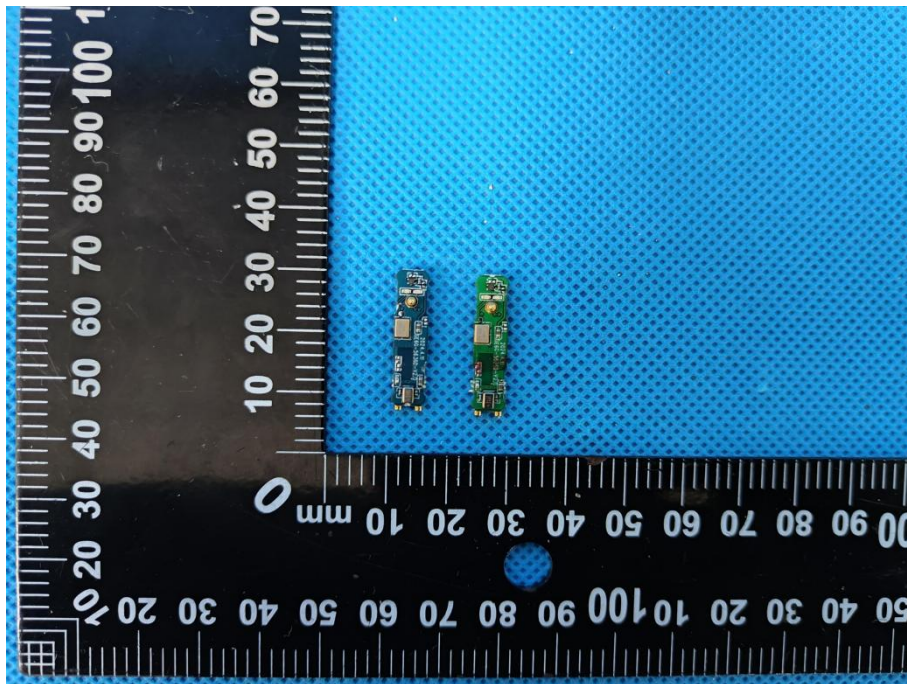
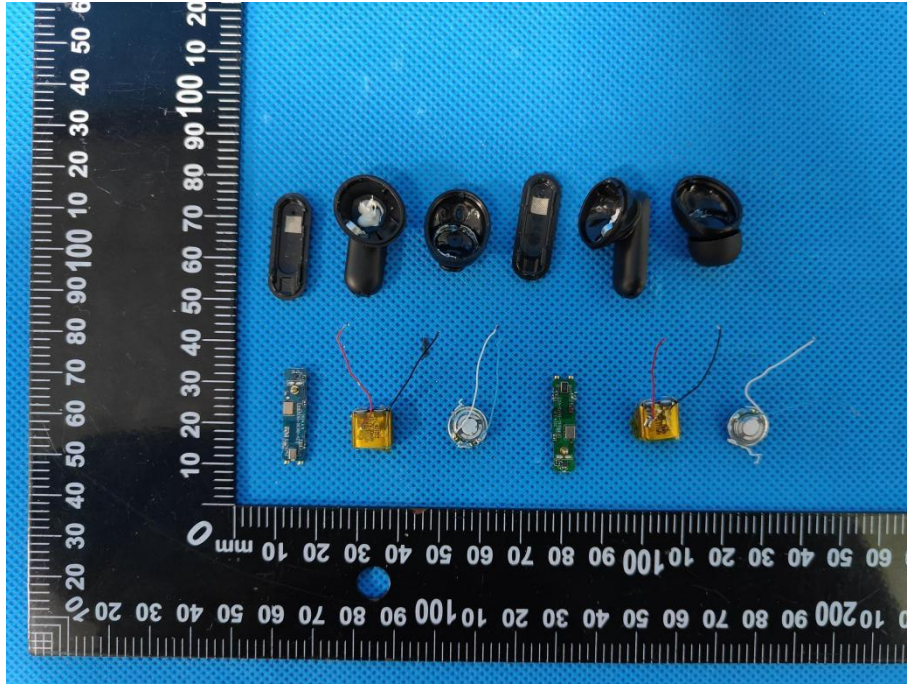


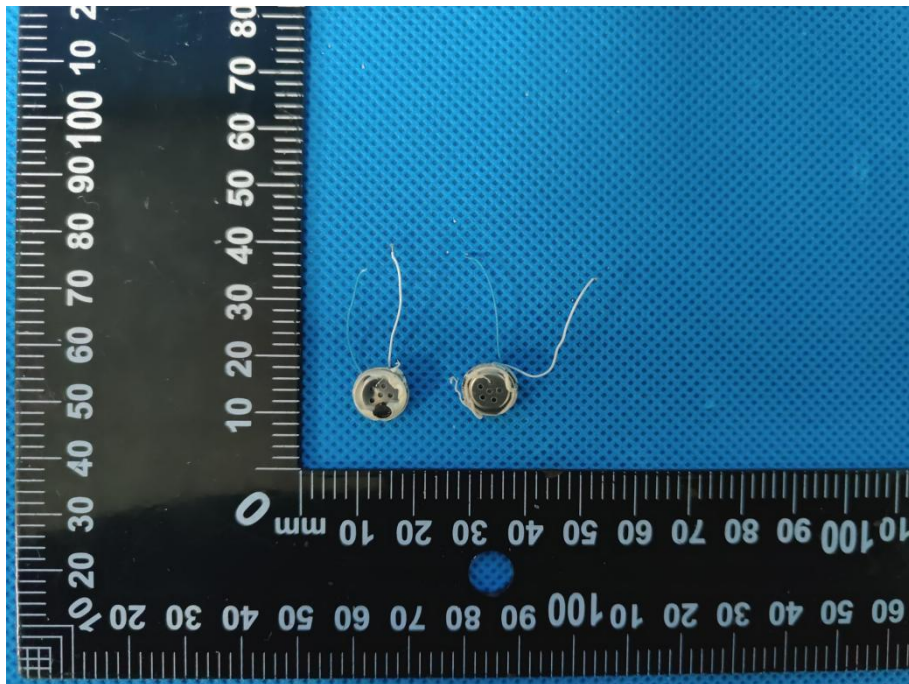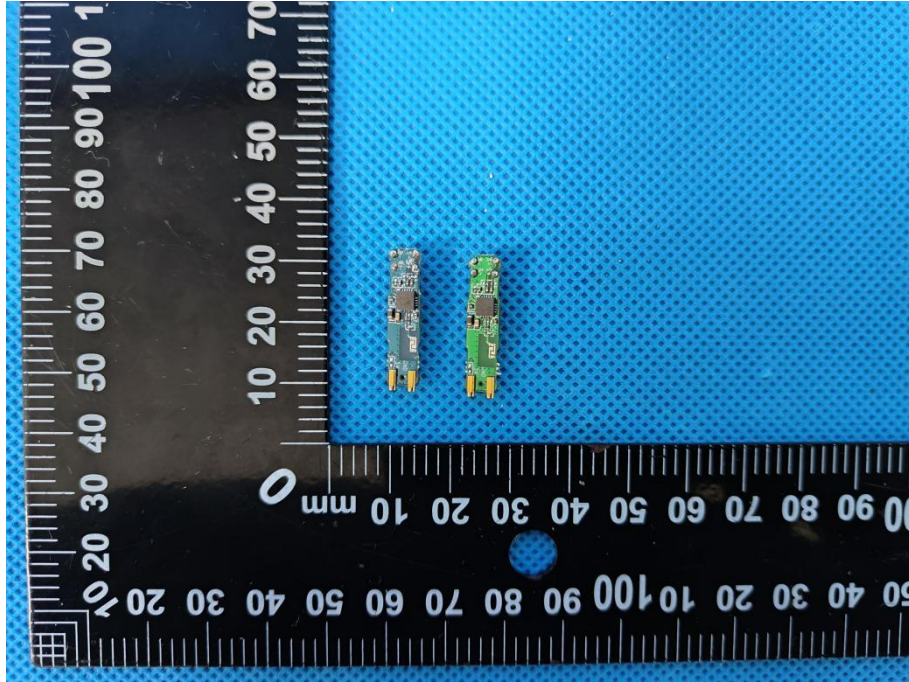


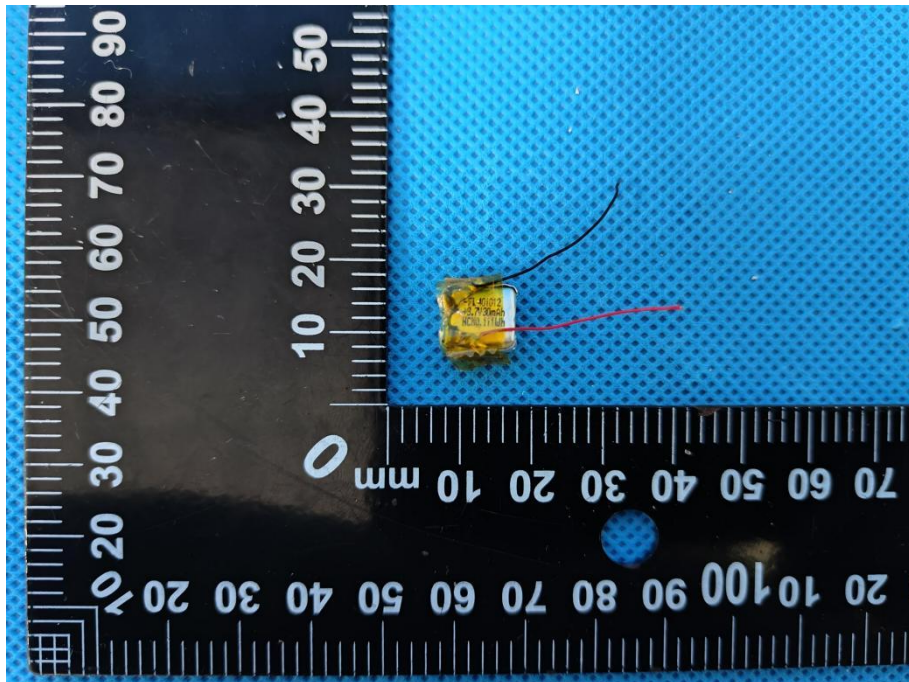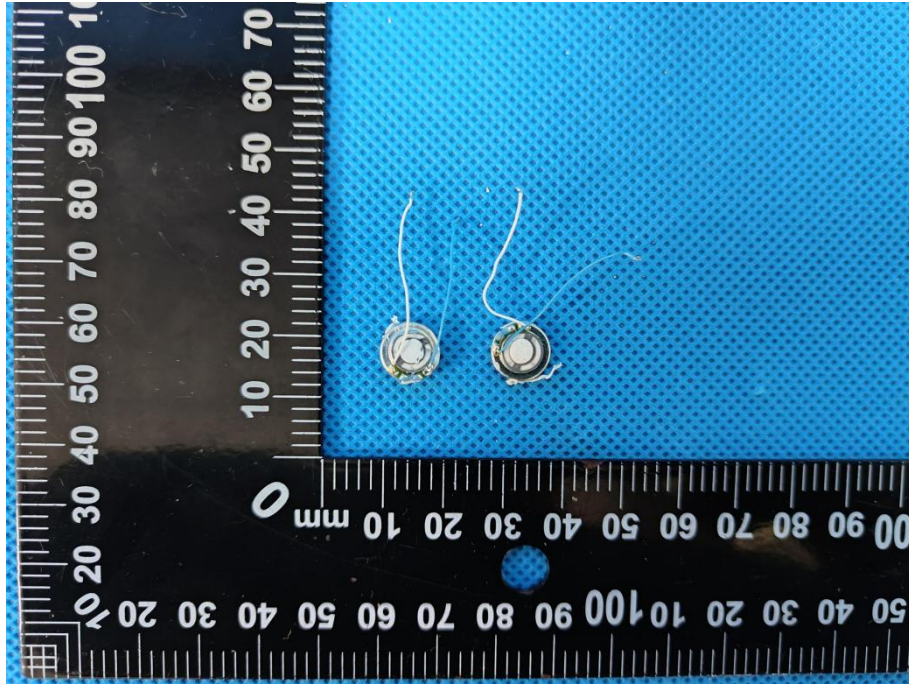

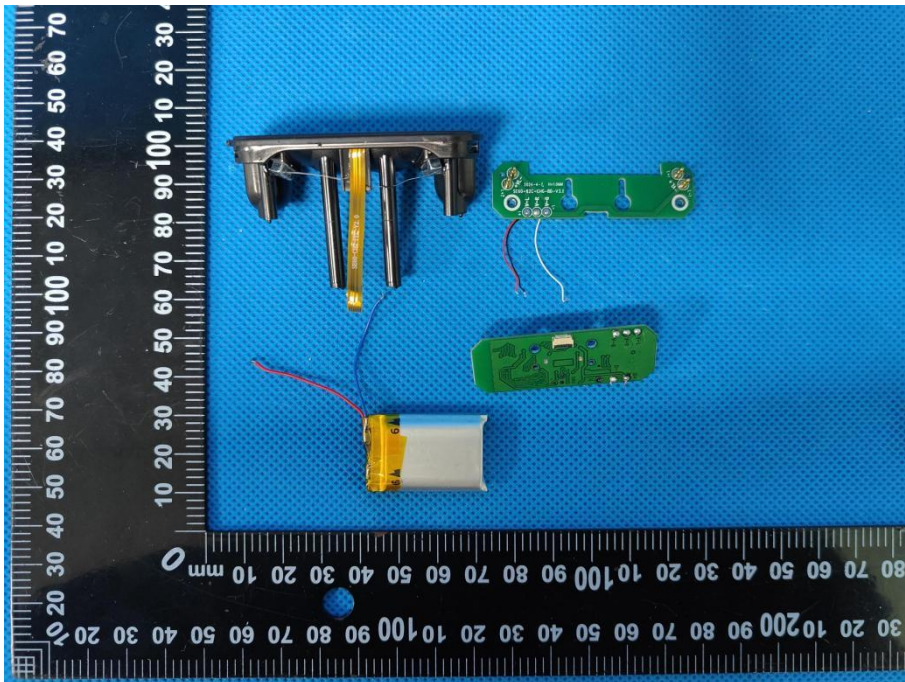

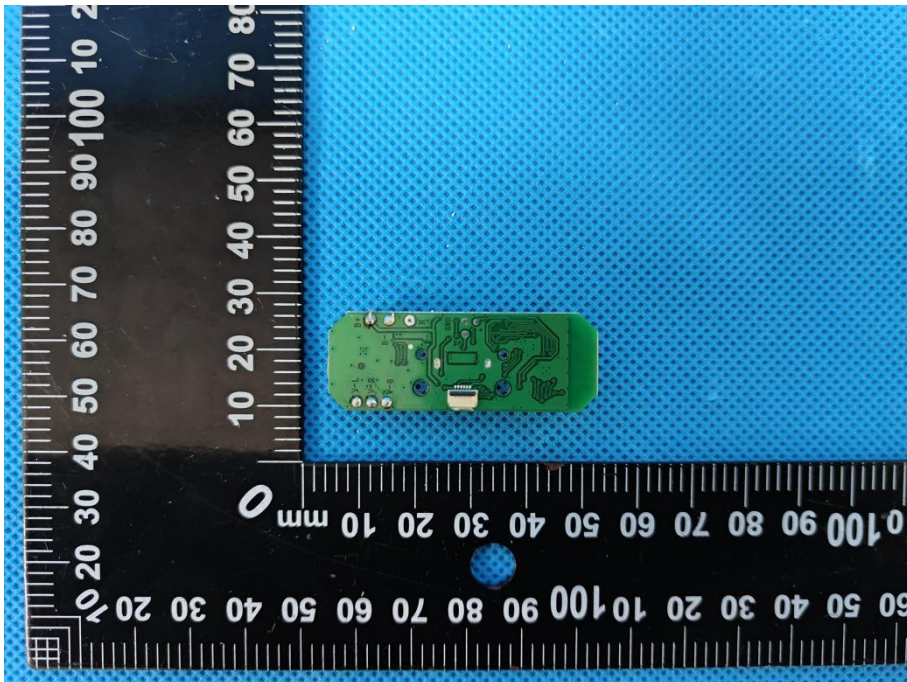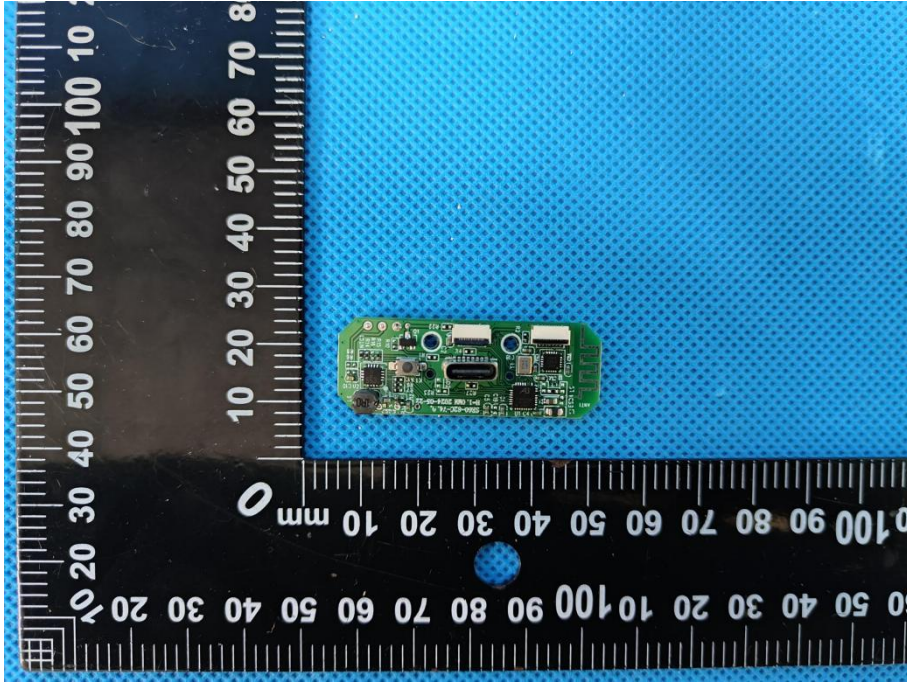

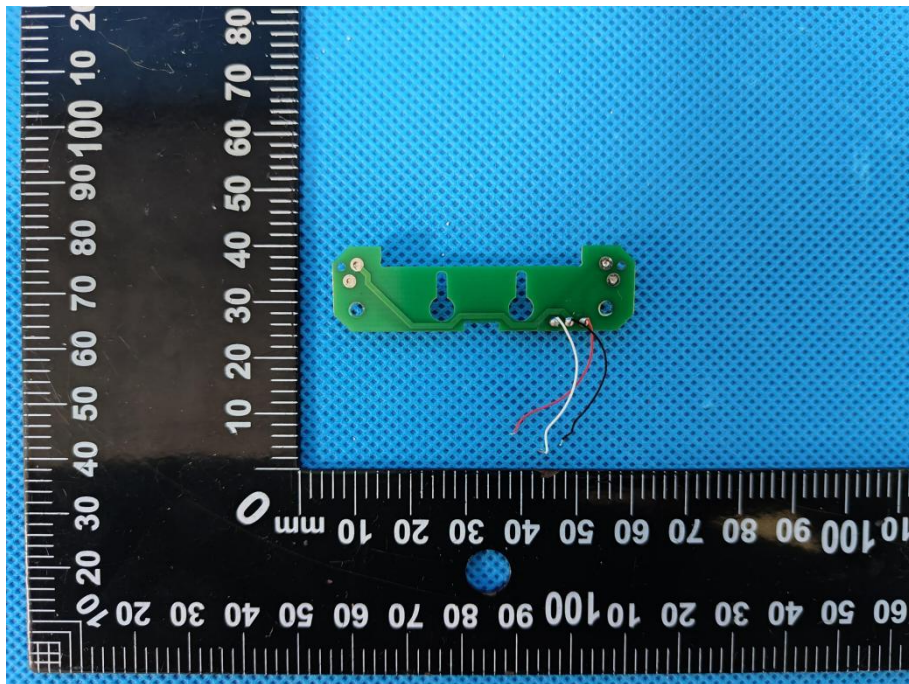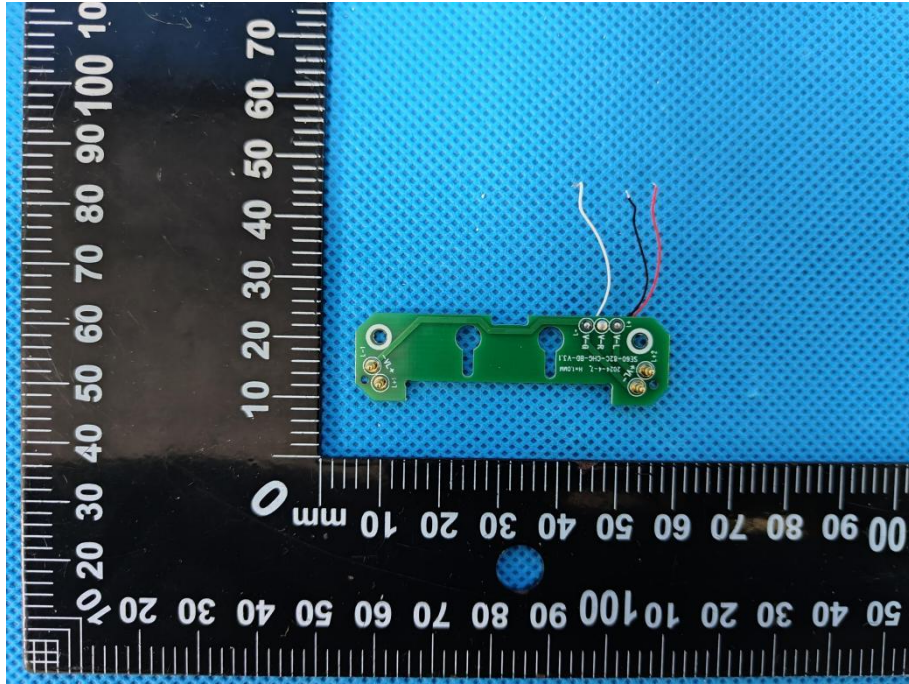

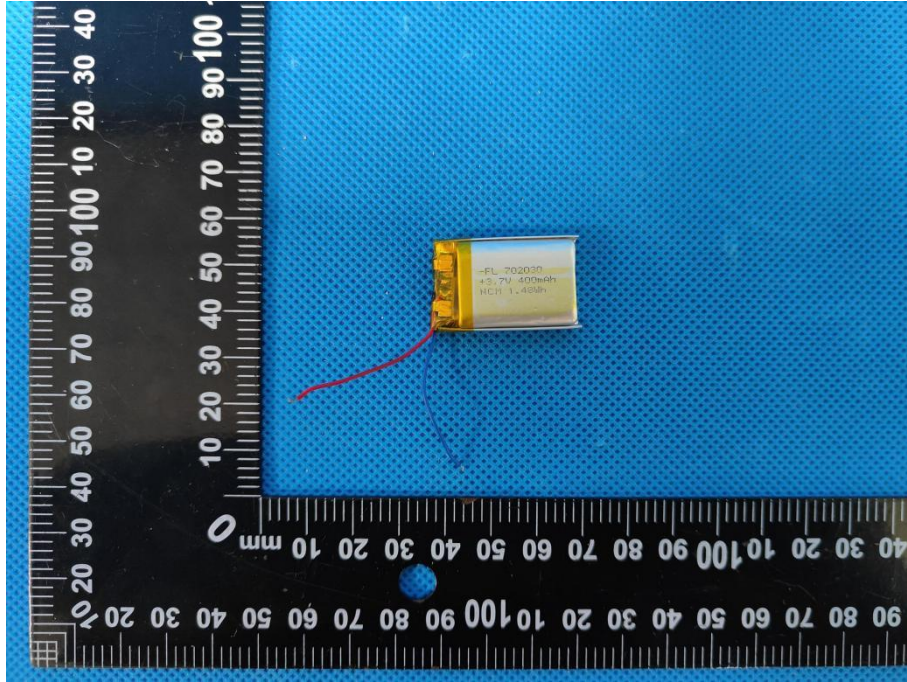

End of report