


**Product Name**                      **Flapper**

<b>Primary material</b>	EPDM/NR
<b>Specifications</b>	Customised services
<b>Performance indicators</b>	<p>Material System: EPDM + Coupling Agent Grafting + Blended Modification</p> <p>Volume Change Rate (ASTM D471):</p> <ul style="list-style-type: none"> <li>— &lt;3% after 500h immersion in chlorine solution (5 ppm)</li> <li>— Chloramine solution (1%) resistance rating: Excellent</li> </ul> <p>Water Resistance: No deformation or cracking after prolonged immersion</p> <p>Ozone Resistance: No cracking after 168 hours</p>
<b>Product Features</b>	Water-resistant sealing, chemical corrosion resistance, high ageing resistance, environmentally friendly and hygienic, stable and durable
<b>Fields of application</b>	Water tank valve seals, water-saving sanitaryware seals, bathroom fittings, etc.
<b>Customised Services</b>	Dimensions, materials and colours can be customised to meet customer requirements.

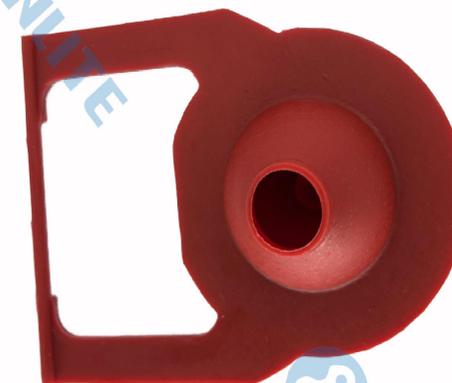

The contents of this product information sheet are for reference only. For detailed information, please consult our customer service team. The company reserves the right to modify this technical information without prior notice or consultation.