


Product Name Shock-absorbing air bladder

Primary material	ACM/FSR
Specifications	Customised services
Performance indicators	<p>Operating Temperature Range: -60°C to 200°C; Tensile Strength: ≥ 15 MPa; Compression Set: $\leq 25\%$ after 150°C \times 72 hours; Air Tightness Test: No leakage after 30 minutes at 1 MPa air pressure;</p>
Product Features	High strength with excellent resilience; Airbag damping, pressure-resistant sealing.
Fields of application	Rubber-coated pulley structures for electric saws, band saws, metal cutting tools and similar equipment
Customised Services	Dimensions, materials and colours can be customised to meet customer requirements.

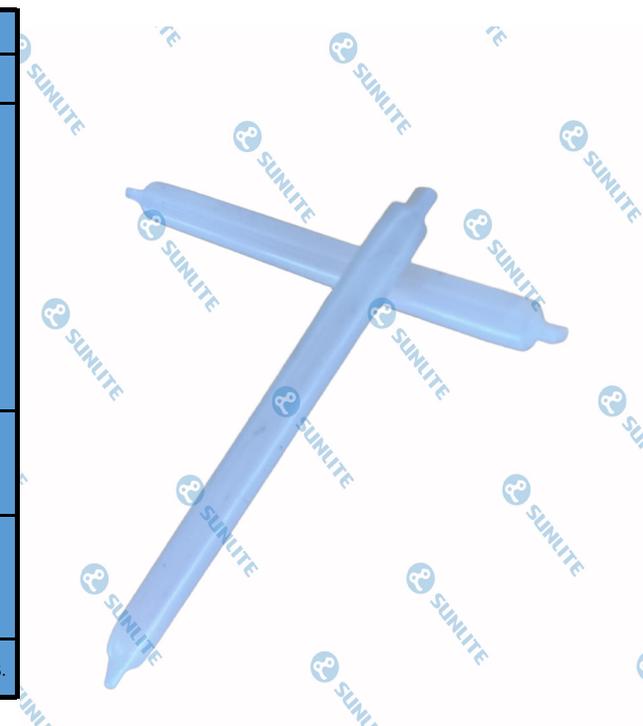

The contents of this product information sheet are for reference only. For detailed information, please consult our customer service team. The company reserves the right to modify this technical information without prior notice or consultation.