


Product Name Vibration Damping Plate

Primary material	IIIR+aluminum foil
Specifications	Customised services
Performance indicators	<p>Composite loss factor: ≥ 0.2</p> <p>Operating temperature range: -40°C to 120°C</p> <p>Optimal application temperature: 0°C to 50°C</p> <p>Structural composition: Butyl rubber substrate + aluminium foil surface layer</p> <p>Adhesion performance: Achieves bubble-free, gap-free, tight adhesion on clean sheet metal surfaces</p> <p>Environmental compliance: Non-toxic and odourless material, meeting automotive interior environmental standards</p>
Product Features	Highly effective noise reduction and vibration damping, weather-resistant and durable, excellent adhesion, easy installation
Fields of application	Noise reduction and vibration damping systems for passenger vehicles, commercial vehicles, new energy vehicles and other vehicle types
Customised Services	Dimensions, materials and colours can be customised to meet customer requirements.

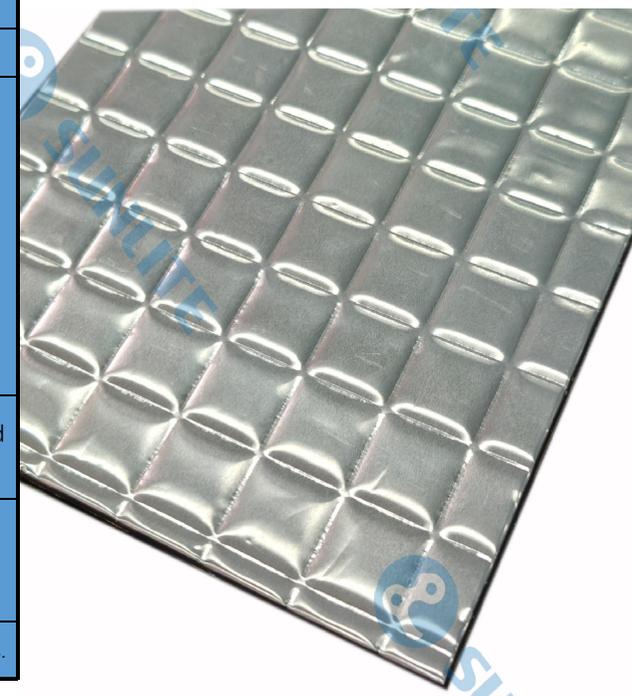

The contents of this product information sheet are for reference only. For detailed information, please consult our customer service team. The company reserves the right to modify this technical information without prior notice or consultation.