


**22.**

## Scomi Prima 3G/4G/5G

### Shaker Screen Replacement

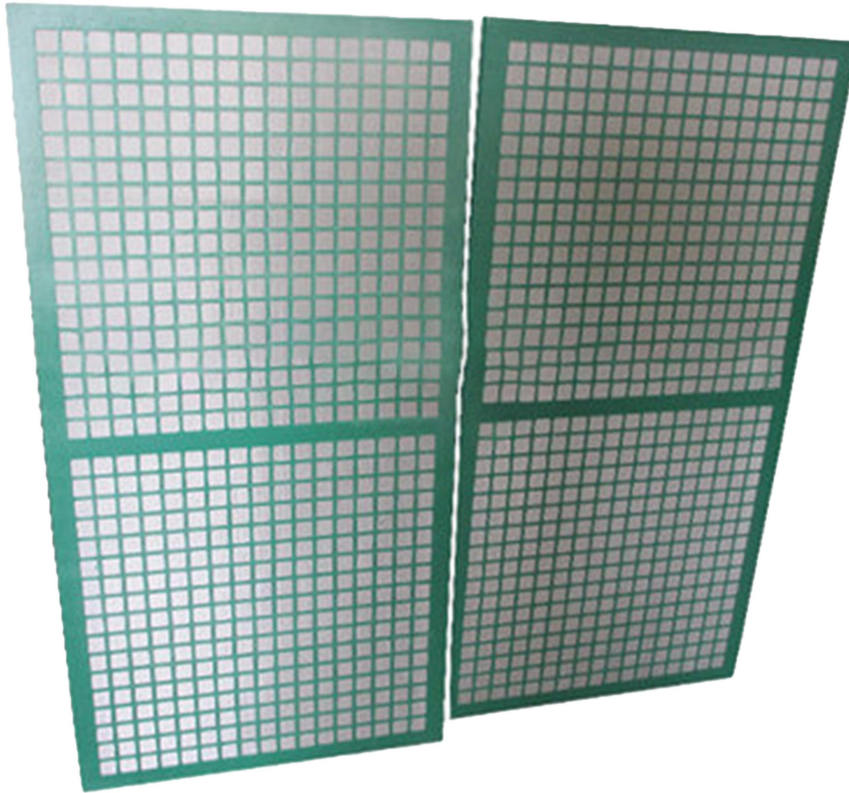


### Compatible shale shakers

- SCM-PrimaG 3P linear motion shale shaker (3-panel).
- SCM-PrimaG 4P linear motion shale shaker (4-panel).
- SCM-PrimaG 4PDD cascading shale shaker (4-panel).
- SCM-PrimaG 5P linear motion shale shaker (5-panel).




## Technical Data


- **Model No.:** FT-SG.
- **Material:** Stainless steel 304/316/316 L.
- **Frame Material:** Q235 steel.
- **Standard:** API RP 13C.
- **API RP 13C Designation:** API 20 – API 325.
- **Series:** XL, XR.
- **Warranty Period:** 1 year.
- **Working Life:** 240-360 hours.

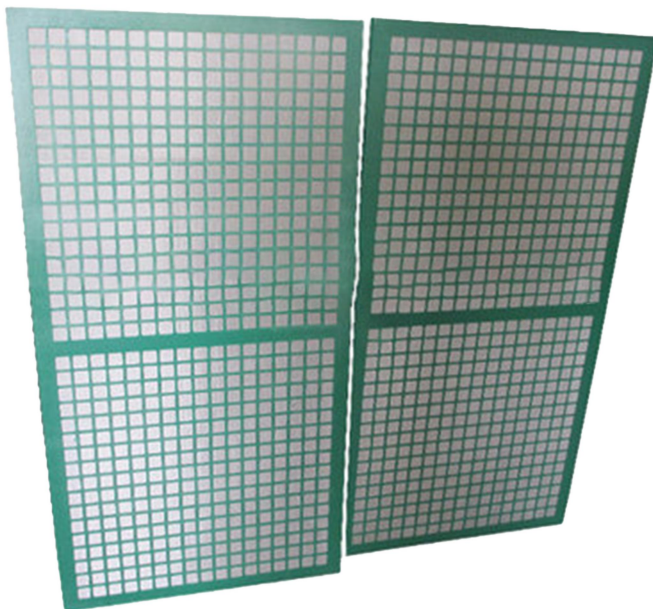

SS 304/316 Wire Mesh Cloth

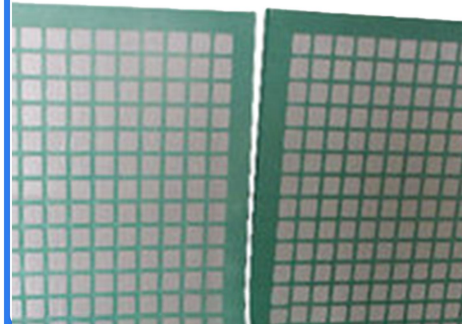

Rectangular Perforated Wear Plate

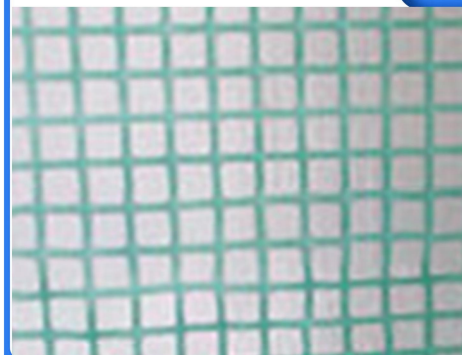



# FT-SPG-A325



## Technical Data

Screen Designation	API RP 13C Designation	Conductance Number	D100 Separation (microns)	Non-Blank Area (sq.ft)
FT-SG-A325	API 325	0.39	48.9	5.78
FT-SG-A270	API 270	0.41	54	5.78
FT-SG-A230	API 230	0.50	63.8	5.78
FT-SG-A200	API 200	0.72	78	5.78
FT-SG-A170	API 170	0.89	91.6	5.78
FT-SG-A140	API 140	1.22	116	5.78
FT-SG-A120	API 120	1.48	120.5	5.78
FT-SG-A100	API 100	2.08	142.5	5.78
FT-SG-A80	API 80	3.56	178.6	5.78
FT -SG-A70	API 70	4.72	218.3	5.78
FT -SG-A60	API 60	5.86	256.9	5.78
FT-SG-A50	API 50	6.69	322.7	5.78
FT -SG-A45	API 45	6.75	377.9	5.78
FT -SG-A35	API 35	7.90	518.3	5.78
FT -SG-A20	API 20	9.03	864.6	5.78

\* **D100:** Particles this size and larger will normally be discarded.

\* **API:** Corresponding API sieve equivalent as per API RP 13C.

\* **Conductance No.:** This represents the ease with which a liquid can flow through the screen. Larger values represent higher volume handling.