





| TEST REPORT EN 62368-1 Audio/video, information and communication technology equipment Part 1: Safety requirements | |
|---|---|
| Report Number.....: | MTL24041622204S01 |
| Complied by (+signature).....: | Andy Zhang  |
| Approved by (+signature).....: | Jack Li  |
| Date of issue..... : | 2024-04-17 |
| Total number of pages..... : | 47 Pages |
| Name of Testing Laboratory preparing the Report..... : | Shenzhen MTL Testing Technology Co., Ltd. 6th Floor, Building 4, No. 22, Dawangshan Second Industrial Zone, Shajing, Baoan District, Shenzhen City, Guangdong Province, China. |
| Applicant's name.....: | Shenzhen WeizhongXin Technology Co., Ltd |
| Address..... : | A415, Building 2, Huaqiang North SEG Science and Technology Park, Futian District, Shenzhen |
| Test specification: | |
| Standard.....: | EN IEC 62368-1:2020+A11:2020 |
| Test procedure.....: | Commission test |
| Non-standard test method.....: | N/A |
| TRF template used..... : | |
| Test Report Form No.....: | IEC62368_1E |
| Test Report Form(s) Originator..: | UL(US) |
| Master TRF..... : | Dated 2022-07-26 |
| General disclaimer: | |
| <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing MTL Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the MTL, responsible for this Test Report. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.</p> | |

| | |
|-------------------------------------|--|
| Test item description..... : | Bluetooth watches |
| Brand Name(s) | N/A |
| Manufacturer..... : | Shenzhen WeizhongXin Technology Co., Ltd |
| Model/Type reference..... : | GT55,GT55pro,GT56,GT56pro,GT95,GT96,GT95pro,GT96pro,GT58,GT59 |
| Ratings..... : | 5V--- |

List of Attachments (including a total number of pages in each attachment):

Summary of testing:

Tests performed (name of test and test clause):

Testing location:


See page 1

Summary of compliance with National Differences (List of countries addressed):

The product fulfils the requirements of _____ (insert standard number and edition and delete the text in parenthesis, leave it blank or delete the whole sentence, if not applicable)

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

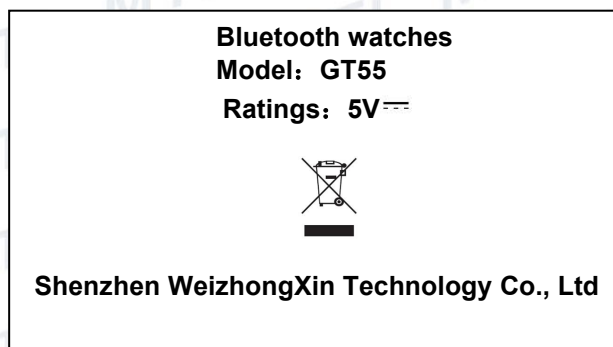

Remark:

- 1.The model GT55, in above marking label can be replaced by the other models list in this test report.
- 2.The CE marking should be added on label for European models.
- 3.The mfr. and importer's name and address should be printed on label, if not possible can be printed on package or a document accompanying the equipment before the product is placed on the EU market.



| TEST ITEM PARTICULARS: | |
|--|---|
| Classification of use by.....: | <input checked="" type="checkbox"/> Ordinary person <input type="checkbox"/> Instructed person <input type="checkbox"/> Skilled person <input type="checkbox"/> Children likely to be present |
| Supply Connection.....: | <input type="checkbox"/> AC Mains <input checked="" type="checkbox"/> DC Mains <input type="checkbox"/> External Circuit - not Mains connected - <input checked="" type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3 |
| Supply % Tolerance | <input type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> + ____ %/ - ____ % <input checked="" type="checkbox"/> None |
| Supply Connection – Type | <input type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input checked="" type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input type="checkbox"/> other: building-in equipment shall be evaluated in end system (see also general product information). |
| Considered current rating of protective device as part of building or equipment installation.....: | N/A Installation location: <input checked="" type="checkbox"/> building; <input type="checkbox"/> equipment |
| Equipment mobility.....: | <input checked="" type="checkbox"/> movable <input checked="" type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted |
| Over voltage category (OVC) | <input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other: |
| Class of equipment | <input type="checkbox"/> Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III |
| Access location | <input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> N/A |
| Pollution degree (PD) | <input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3 |
| Manufacturer’s specified maximum operating ambient.....: | 35°C |
| IP protection class | <input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP ____ |
| Power Systems | <input checked="" type="checkbox"/> TN <input type="checkbox"/> TT <input type="checkbox"/> IT - ____ V _{L-L} |
| Altitude during operation (m) | <input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> ____ m |
| Altitude of test laboratory (m) | <input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> ____ m |
| Mass of equipment (kg) | <input checked="" type="checkbox"/> Approx. 0.08 |



| |
|--|
| Possible test case verdicts: - test case does not apply to the test object : N/A - test object does meet the requirement..... : P (Pass) - test object does not meet the requirement : F (Fail) |
| Testing: Date of receipt of test item..... : 2024-04-10 Date (s) of performance of tests..... : 2024-04-10 to 2024-04-16 |
| General remarks: "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator. |
| When differences exist; they shall be identified in the General product information section. |
| Name and address of factory (ies)..... : Shenzhen WeizhongXin Technology Co., Ltd A415, Building 2, Huaqiang North SEG Science and Technology Park, Futian District, Shenzhen |
| General product information and other remarks: |



ENERGY SOURCE DIAGRAM

Indicate which energy sources are included in the energy source diagram. Insert diagram below

ES1 (All circuits)



| OVERVIEW OF EMPLOYED SAFEGUARDS | | | | |
|---|--|--------------------------------|---------------|---------------------------|
| Clause | Possible Hazard | | | |
| 5.1 | Electrically-caused injury | | | |
| Body Part (e.g. Ordinary) | Energy Source (ES3: Primary Filter circuit) | Safeguards | | |
| | | Basic | Supplementary | Reinforced (Enclosure) |
| Ordinary | ES1: Primary circuit | N/A | N/A | |
| 6.1 | Electrically-caused fire | | | |
| Material part (e.g. mouse enclosure) | Energy Source | Safeguards | | |
| | | Basic | Supplementary | Reinforced |
| Output terminal | PS1: <15 Watt circuit | Evaluated in the end use | N/A | N/A |
| 7.1 | Injury caused by hazardous substances | | | |
| Body Part (e.g., skilled) | Energy Source (hazardous material) | Safeguards | | |
| | | Basic | Supplementary | Reinforced |
| Ordinary | ES1:Enclosure outside | N/A | N/A | N/A |
| 8.1 | Mechanically-caused injury | | | |
| Body Part (e.g. Ordinary) | Energy Source (MS3: High Pressure Lamp) | Safeguards | | |
| | | Basic | Supplementary | Reinforced (Enclosure) |
| Ordinary | MS1: Mass of the unit | N/A | N/A | N/A |
| 9.1 | Thermal Burn | | | |
| Body Part (e.g., Ordinary) | Energy Source (TS2) | Safeguards | | |
| | | Basic | Supplementary | Reinforced |
| Ordinary | TS1: Enclosure | N/A* | N/A | N/A |
| 10.1 | Radiation | | | |
| Body Part (e.g., Ordinary) | Energy Source (Output from audio port) | Safeguards | | |
| | | Basic | Supplementary | Reinforced |
| N/A | N/A | N/A | N/A | N/A |
| Supplementary Information: *built-in product, to be evaluated in final product. | | | | |
| (1) See attached energy source diagram for additional details. | | | | |
| (2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault | | | | |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|----------|--|---|---------|
| 4 | GENERAL REQUIREMENTS | | P |
| 4.1.1 | Acceptance of materials, components and sub-assemblies | See appended table 4.1.2 | P |
| 4.1.2 | Use of components | Components which are certified to IEC and/or national standards are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment. See also Annex G | P |
| 4.1.3 | Equipment design and construction | The product is supplied by ES3 circuits, and protection in regard to risk of ignition, mechanical-caused injury and thermal burn considered. | P |
| 4.1.15 | Markings and instructions.....: | (See Annex F) | P |
| 4.4.4 | Safeguard robustness | | P |
| 4.4.4.2 | Steady force tests.....: | | N/A |
| 4.4.4.3 | Drop tests.....: | (See Annex T.7) | P |
| 4.4.4.4 | Impact tests.....: | | N/A |
| 4.4.4.5 | Internal accessible safeguard enclosure and barrier tests.....: | | N/A |
| 4.4.4.6 | Glass Impact tests.....: | | N/A |
| 4.4.4.7 | Thermoplastic material tests.....: | | N/A |
| 4.4.4.8 | Air comprising a safeguard.....: | | N/A |
| 4.4.4.9 | Accessibility and safeguard effectiveness | | P |
| 4.5 | Explosion | | N/A |
| 4.6 | Fixing of conductors | | P |
| 4.6.1 | Fix conductors not to defeat a safeguard | | N/A |
| 4.6.2 | 10 N force test applied to | | N/A |
| 4.7 | Equipment for direct insertion into mains socket - outlets | | P |
| 4.7.2 | Mains plug part complies with the relevant standard.....: | | P |
| 4.7.3 | Torque (Nm).....: | | N/A |
| 4.8 | Products containing coin/button cell batteries | | N/A |
| 4.8.2 | Instructional safeguard | | N/A |
| 4.8.3 | Battery Compartment Construction | | N/A |
| | Means to reduce the possibility of children removing the battery.....: | | N/A |
| 4.8.4 | Battery Compartment Mechanical Tests.....: | | N/A |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--|-----------------|---------|
| 4.8.5 | Battery Accessibility | | N/A |
| 4.9 | Likelihood of fire or shock due to entry of conductive object..... : | | N/A |

| | | | |
|-----------|---|----------------------------|-----|
| 5 | ELECTRICALLY-CAUSED INJURY | | P |
| 5.2.1 | Electrical energy source classifications..... : | | P |
| 5.2.2 | ES1, ES2 and ES3 limits | | P |
| 5.2.2.2 | Steady-state voltage and current..... : | | N/A |
| 5.2.2.3 | Capacitance limits..... : | | N/A |
| 5.2.2.4 | Single pulse limits..... : | | N/A |
| 5.2.2.5 | Limits for repetitive pulses..... : | | N/A |
| 5.2.2.6 | Ringing signals | | N/A |
| 5.2.2.7 | Audio signals | | N/A |
| 5.3 | Protection against electrical energy sources | | N/A |
| 5.3.1 | General Requirements for accessible parts to ordinary, instructed and skilled persons | | N/A |
| 5.3.2.1 | Accessibility to electrical energy sources and safeguards | | N/A |
| 5.3.2.2 | Contact requirements | | N/A |
| | a) Test with test probe from Annex V..... : | | N/A |
| | b) Electric strength test potential (V)..... : | | N/A |
| | c) Air gap (mm) | | N/A |
| 5.3.2.4 | Terminals for connecting stripped wire | | N/A |
| 5.4 | Insulation materials and requirements | | N/A |
| 5.4.1.2 | Properties of insulating material | | N/A |
| 5.4.1.3 | Humidity conditioning..... : | See sub-clause 5.4.8 | P |
| 5.4.1.4 | Maximum operating temperature for insulating materials | See appended table 5.4.1.4 | P |
| 5.4.1.5 | Pollution degree..... : | | — |
| 5.4.1.5.2 | Test for pollution degree 1 environment and for an insulating compound | | N/A |
| 5.4.1.5.3 | Thermal cycling | | N/A |
| 5.4.1.6 | Insulation in transformers with varying dimensions | | N/A |
| 5.4.1.7 | Insulation in circuits generating starting pulses | | N/A |
| 5.4.1.8 | Determination of working voltage | | N/A |
| 5.4.1.9 | Insulating surfaces | | N/A |
| 5.4.1.10 | Thermoplastic parts on which conductive metallic parts are directly mounted | | N/A |



| EN 62368-1 | | | |
|------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 5.4.1.10.2 | Vicat softening temperature..... : | | N/A |
| 5.4.1.10.3 | Ball pressure : | | N/A |
| 5.4.2 | Clearances | | N/A |
| 5.4.2.2 | Determining clearance using peak working voltage | | N/A |
| 5.4.2.3 | Determining clearance using required withstand voltage : | | N/A |
| | a) a.c. mains transient voltage..... : | | — |
| | b) d.c. mains transient voltage : | | — |
| | c) external circuit transient voltage..... : | | — |
| | d) transient voltage determined by measurement : | | — |
| 5.4.2.4 | Determining the adequacy of a clearance using an electric strength test | | N/A |
| 5.4.2.5 | Multiplication factors for clearances and test voltages..... : | | N/A |
| 5.4.3 | Creepage distances..... : | | N/A |
| 5.4.3.1 | General | | N/A |
| 5.4.3.3 | Material Group : | | N/A |
| 5.4.4 | Solid insulation | | N/A |
| 5.4.4.2 | Minimum distance through insulation : | | N/A |
| 5.4.4.3 | Insulation compound forming solid insulation | | N/A |
| 5.4.4.4 | Solid insulation in semiconductor devices | | N/A |
| 5.4.4.5 | Cemented joints | | N/A |
| 5.4.4.6 | Thin sheet material | | N/A |
| 5.4.4.6.1 | General requirements | | N/A |
| 5.4.4.6.2 | Separable thin sheet material | | N/A |
| | Number of layers (pcs) : | | N/A |
| 5.4.4.6.3 | Non-separable thin sheet material | | N/A |
| 5.4.4.6.4 | Standard test procedure for non-separable thin sheet material..... : | | N/A |
| 5.4.4.6.5 | Mandrel test | | N/A |
| 5.4.4.7 | Solid insulation in wound components | | N/A |
| 5.4.4.9 | Solid insulation at frequencies >30 kHz..... : | | N/A |
| 5.4.5 | Antenna terminal insulation | | N/A |
| 5.4.5.1 | General | | N/A |
| 5.4.5.2 | Voltage surge test | | N/A |
| | Insulation resistance (MΩ)..... : | | N/A |



| EN 62368-1 | | | |
|------------|--|--------------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 5.4.6 | Insulation of internal wire as part of supplementary safeguard..... : | Without internal wire | N/A |
| 5.4.7 | Tests for semiconductor components and for cemented joints | | N/A |
| 5.4.8 | Humidity conditioning | | P |
| | Relative humidity (%)..... : | 93% | P |
| | Temperature (°C) | 40°C | — |
| | Duration (h) | 48h | — |
| 5.4.9 | Electric strength test..... : | See appended table 5.4.9 | N/A |
| 5.4.9.1 | Test procedure for a solid insulation type test | | N/A |
| 5.4.9.2 | Test procedure for routine tests | | N/A |
| 5.4.10 | Protection against transient voltages between external circuit | | N/A |
| 5.4.10.1 | Parts and circuits separated from external circuits | See appended table 5.4.9 | N/A |
| 5.4.10.2 | Test methods | | N/A |
| 5.4.10.2.1 | General | | N/A |
| 5.4.10.2.2 | Impulse test..... : | See appended table 5.4.9 | N/A |
| 5.4.10.2.3 | Steady-state test..... : | See appended table 5.4.9 | N/A |
| 5.4.11 | Insulation between external circuits and earthed circuitry..... : | | N/A |
| 5.4.11.1 | Exceptions to separation between external circuits and earth | | N/A |
| 5.4.11.2 | Requirements | | N/A |
| | Rated operating voltage U_{op} (V)..... : | | — |
| | Nominal voltage U_{peak} (V)..... : | | — |
| | Max increase due to variation U_{sp} : | | — |
| | Max increase due to ageing ΔU_{sa} : | | — |
| | $U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$: | | — |
| 5.5 | Components as safeguards | | |
| 5.5.1 | General | | N/A |
| 5.5.2 | Capacitors and RC units | | N/A |
| 5.5.2.1 | General requirement | | N/A |
| 5.5.2.2 | Safeguards against capacitor discharge after disconnection of a connector..... : | | N/A |
| 5.5.3 | Transformers | | N/A |
| 5.5.4 | Optocouplers | | N/A |



| EN 62368-1 | | | |
|------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 5.5.5 | Relays | | N/A |
| 5.5.6 | Resistors | | N/A |
| 5.5.7 | SPD's | | N/A |
| 5.5.7.1 | Use of an SPD connected to reliable earthing | | N/A |
| 5.5.7.2 | Use of an SPD between mains and protective earth | | N/A |
| 5.5.8 | Insulation between the mains and external circuit consisting of a coaxial cable..... : | | N/A |
| 5.6 | Protective conductor | | N/A |
| 5.6.2 | Requirement for protective conductors | | N/A |
| 5.6.2.1 | General requirements | | N/A |
| 5.6.2.2 | Colour of insulation | | N/A |
| 5.6.3 | Requirement for protective earthing conductors | | N/A |
| | Protective earthing conductor size (mm ²) : | | — |
| 5.6.4 | Requirement for protective bonding conductors | | N/A |
| 5.6.4.1 | Protective bonding conductors | | N/A |
| | Protective bonding conductor size (mm ²)..... : | | — |
| | Protective current rating (A) : | | — |
| 5.6.4.3 | Current limiting and overcurrent protective devices | | N/A |
| 5.6.5 | Terminals for protective conductors | | N/A |
| 5.6.5.1 | Requirement | | N/A |
| | Conductor size (mm ²), nominal thread diameter (mm)..... : | | N/A |
| 5.6.5.2 | Corrosion | | N/A |
| 5.6.6 | Resistance of the protective system | | N/A |
| 5.6.6.1 | Requirements | | N/A |
| 5.6.6.2 | Test Method Resistance..... : | | N/A |
| 5.6.7 | Reliable earthing | | N/A |
| 5.7 | Prospective touch voltage, touch current and protective conductor current | | N/A |
| 5.7.2 | Measuring devices and networks | | N/A |
| 5.7.2.1 | Measurement of touch current..... : | | N/A |
| 5.7.2.2 | Measurement of prospective touch voltage | | N/A |
| 5.7.3 | Equipment set-up, supply connections and earth connections | | N/A |
| | System of interconnected equipment (separate connections/single connection)..... : | | — |



| EN 62368-1 | | | |
|------------|---|-----------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Multiple connections to mains (one connection at a time/simultaneous connections).....: | | — |
| 5.7.4 | Earthed conductive accessible parts.....: | | N/A |
| 5.7.5 | Protective conductor current | | N/A |
| | Supply Voltage (V).....: | | — |
| | Measured current (mA).....: | | — |
| | Instructional Safeguard.....: | See F.4 and F.5 | N/A |
| 5.7.6 | Prospective touch voltage and touch current due to external circuits | No external circuits. | N/A |
| 5.7.6.1 | Touch current from coaxial cables | | N/A |
| 5.7.6.2 | Prospective touch voltage and touch current from external circuits | | N/A |
| 5.7.7 | Summation of touch currents from external circuits | | N/A |
| | a) Equipment with earthed external circuits Measured current (mA).....: | | N/A |
| | b) Equipment whose external circuits are not referenced to earth. Measured current (mA).....: | | N/A |

| | | | |
|-----------|---|--|-----|
| 6 | ELECTRICALLY CAUSED FIRE | | N/A |
| 6.2 | Classification of power sources (PS) and potential ignition sources (PIS) | | N/A |
| 6.2.2 | Power source circuit classifications | | N/A |
| 6.2.2.1 | General | | N/A |
| 6.2.2.2 | Power measurement for worst-case load fault.... : | | N/A |
| 6.2.2.3 | Power measurement for worst-case power source fault.....: | | N/A |
| 6.2.2.4 | PS1 | | N/A |
| 6.2.2.5 | PS2 | | N/A |
| 6.2.2.6 | PS3 | | N/A |
| 6.2.3 | Classification of potential ignition sources | | N/A |
| 6.2.3.1 | Arcing PIS | | N/A |
| 6.2.3.2 | Resistive PIS | | N/A |
| 6.3 | Safeguards against fire under normal operating and abnormal operating conditions | | N/A |
| 6.3.1 (a) | No ignition and attainable temperature value less than 90% defined by ISO 871 or less than 300 °C for unknown materials.....: | | N/A |
| 6.3.1 (b) | Combustible materials outside fire enclosure | | N/A |
| 6.4 | Safeguards against fire under single fault conditions | | N/A |
| 6.4.1 | Safeguard Method | | N/A |



| EN 62368-1 | | | |
|------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 6.4.2 | Reduction of the likelihood of ignition under single fault conditions in PS1 circuits | | N/A |
| 6.4.3 | Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits | | N/A |
| 6.4.3.1 | General | | N/A |
| 6.4.3.2 | Supplementary Safeguards | | N/A |
| | Special conditions if conductors on printed boards are opened or peeled | | N/A |
| 6.4.3.3 | Single Fault Conditions..... : | | N/A |
| | Special conditions for temperature limited by fuse | | N/A |
| 6.4.4 | Control of fire spread in PS1 circuits | | N/A |
| 6.4.5 | Control of fire spread in PS2 circuits | | N/A |
| 6.4.5.2 | Supplementary safeguards : | | N/A |
| 6.4.6 | Control of fire spread in PS3 circuit | | N/A |
| 6.4.7 | Separation of combustible materials from a PIS | | N/A |
| 6.4.7.1 | General..... : | | N/A |
| 6.4.7.2 | Separation by distance | | N/A |
| 6.4.7.3 | Separation by a fire barrier | | N/A |
| 6.4.8 | Fire enclosures and fire barriers | | N/A |
| 6.4.8.1 | Fire enclosure and fire barrier material properties | | N/A |
| 6.4.8.2.1 | Requirements for a fire barrier | | N/A |
| 6.4.8.2.2 | Requirements for a fire enclosure | | N/A |
| 6.4.8.3 | Constructional requirements for a fire enclosure and a fire barrier | | N/A |
| 6.4.8.3.1 | Fire enclosure and fire barrier openings | | N/A |
| 6.4.8.3.2 | Fire barrier dimensions | | N/A |
| 6.4.8.3.3 | Top Openings in Fire Enclosure: dimensions (mm) : | | N/A |
| | Needle Flame test | | N/A |
| 6.4.8.3.4 | Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm) : | | N/A |
| | Flammability tests for the bottom of a fire enclosure : | | N/A |
| 6.4.8.3.5 | Integrity of the fire enclosure, condition met: a), b) or c)..... : | | N/A |
| 6.4.8.4 | Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating..... : | | N/A |
| 6.5 | Internal and external wiring | | N/A |
| 6.5.1 | Requirements | | N/A |



| EN 62368-1 | | | |
|------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| 6.5.2 | Cross-sectional area (mm ²) | | — |
| 6.5.3 | Requirements for interconnection to building wiring..... | | N/A |
| 6.6 | Safeguards against fire due to connection to additional equipment | | N/A |
| | External port limited to PS2 or complies with Clause Q.1 | | N/A |

| 7 | INJURY CAUSED BY HAZARDOUS SUBSTANCES | | N/A |
|-----|--|---|-----|
| 7.2 | Reduction of exposure to hazardous substances | No hazardous chemicals within the equipment except as covered by Annex M. See also cl.4.4.4 | N/A |
| 7.3 | Ozone exposure | No ozone production within the equipment. | N/A |
| 7.4 | Use of personal safeguards (PPE) | | N/A |
| | Personal safeguards and instructions..... | | — |
| 7.5 | Use of instructional safeguards and instructions | | N/A |
| | Instructional safeguard (ISO 7010)..... | | — |
| 7.6 | Batteries..... | | N/A |

| 8 | MECHANICALLY-CAUSED INJURY | | P |
|-----------|---|---|-----|
| 8.1 | General | See the following details. | P |
| 8.2 | Mechanical energy source classifications | Sharp edges and corners, classified as MS1 Equipment maximum mass < 7 kg, classified as MS1 | P |
| 8.3 | Safeguards against mechanical energy sources | | N/A |
| 8.4 | Safeguards against parts with sharp edges and corners | Accessible edges and corners of the equipment are rounded and are classified as MS1. | N/A |
| 8.4.1 | Safeguards | | N/A |
| 8.5 | Safeguards against moving parts | | N/A |
| 8.5.1 | MS2 or MS3 part required to be accessible for the function of the equipment | | N/A |
| 8.5.2 | Instructional Safeguard..... | | — |
| 8.5.4 | Special categories of equipment comprising moving parts | | N/A |
| 8.5.4.1 | Large data storage equipment | | N/A |
| 8.5.4.2 | Equipment having electromechanical device for destruction of media | | N/A |
| 8.5.4.2.1 | Safeguards and Safety Interlocks..... | | N/A |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|-----------|---|-----------------|---------|
| 8.5.4.2.2 | Instructional safeguards against moving parts | | N/A |
| | Instructional Safeguard..... : | | — |
| 8.5.4.2.3 | Disconnection from the supply | | N/A |
| 8.5.4.2.4 | Probe type and force (N)..... : | | N/A |
| 8.5.5 | High Pressure Lamps | | N/A |
| 8.5.5.1 | Energy Source Classification | | N/A |
| 8.5.5.2 | High Pressure Lamp Explosion Test..... : | | N/A |
| 8.6 | Stability | | N/A |
| 8.6.1 | Product classification | | N/A |
| | Instructional Safeguard..... : | | — |
| 8.6.2 | Static stability | | N/A |
| 8.6.2.2 | Static stability test | | N/A |
| | Applied Force..... : | | — |
| 8.6.2.3 | Downward Force Test | | N/A |
| 8.6.3 | Relocation stability test | | N/A |
| | Unit configuration during 10° tilt..... : | | — |
| 8.6.4 | Glass slide test | | N/A |
| 8.6.5 | Horizontal force test (Applied Force)..... : | | N/A |
| | Position of feet or movable parts..... : | | — |
| 8.7 | Equipment mounted to wall or ceiling | | N/A |
| 8.7.1 | Mounting Means (Length of screws (mm) and mounting surface) | | N/A |
| 8.7.2 | Direction and applied force..... : | | N/A |
| 8.8 | Handles strength | | N/A |
| 8.8.1 | Classification | | N/A |
| 8.8.2 | Applied Force | | N/A |
| 8.9 | Wheels or casters attachment requirements | | N/A |
| 8.9.1 | Classification | | N/A |
| 8.9.2 | Applied force..... : | | — |
| 8.10 | Carts, stands and similar carriers | | N/A |
| 8.10.1 | General | | N/A |
| 8.10.2 | Marking and instructions | | N/A |
| | Instructional Safeguard..... : | | — |
| 8.10.3 | Cart, stand or carrier loading test and compliance | | N/A |
| | Applied force..... : | | — |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|---|-----------------|---------|
| 8.10.4 | Cart, stand or carrier impact test | | N/A |
| 8.10.5 | Mechanical stability | | N/A |
| | Applied horizontal force (N)..... : | | — |
| 8.10.6 | Thermoplastic temperature stability (°C)..... : | | N/A |
| 8.11 | Mounting means for rack mounted equipment | | N/A |
| 8.11.1 | General | | N/A |
| 8.11.2 | Product Classification | | N/A |
| 8.11.3 | Mechanical strength test, variable <i>N</i> : | | N/A |
| 8.11.4 | Mechanical strength test 250N, including end stops | | N/A |
| 8.12 | Telescoping or rod antennas..... | | N/A |
| | Button/Ball diameter (mm)..... : | | — |

| | | | |
|----------|--|--|-----|
| 9 | THERMAL BURN INJURY | | N/A |
| 9.2 | Thermal energy source classifications | | N/A |
| 9.3 | Safeguard against thermal energy sources | | N/A |
| 9.4 | Requirements for safeguards | | N/A |
| 9.4.1 | Equipment safeguard | | N/A |
| 9.4.2 | Instructional safeguard : | | N/A |

| | | | |
|-----------|--|--|-----|
| 10 | RADIATION | | N/A |
| 10.2 | Radiation energy source classification | | N/A |
| 10.2.1 | General classification | | N/A |
| 10.3 | Protection against laser radiation | | N/A |
| | Laser radiation that exists equipment: | | — |
| | Normal, abnormal, single-fault..... | | N/A |
| | Instructional safeguard..... | | — |
| | Tool..... | | — |
| 10.4 | Protection against visible, infrared, and UV radiation | | N/A |
| 10.4.1 | General | | N/A |
| 10.4.1.a) | RS3 for Ordinary and instructed persons..... | | N/A |
| 10.4.1.b) | RS3 accessible to a skilled person..... | | N/A |
| | Personal safeguard (PPE) instructional safeguard..... | | — |
| 10.4.1.c) | Equipment visible, IR, UV does not exceed RS1..... | | N/A |
| 10.4.1.d) | Normal, abnormal, single-fault conditions | | N/A |



| EN 62368-1 | | | |
|------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | : | | |
| 10.4.1.e) | Enclosure material employed as safeguard is opaque..... | | N/A |
| 10.4.1.f) | UV attenuation..... | | N/A |
| 10.4.1.g) | Materials resistant to degradation UV..... | | N/A |
| 10.4.1.h) | Enclosure containment of optical radiation..... | | N/A |
| 10.4.1.i) | Exempt Group under normal operating conditions..... | | N/A |
| 10.4.2 | Instructional safeguard..... | | N/A |
| 10.5 | Protection against x-radiation | | N/A |
| 10.5.1 | X- radiation energy source that exists equipment..... | | N/A |
| | Normal, abnormal, single fault conditions | | N/A |
| | Equipment safeguards..... | | N/A |
| | Instructional safeguard for skilled person..... | | N/A |
| 10.5.3 | Most unfavourable supply voltage to give maximum radiation..... | | — |
| | Abnormal and single-fault condition : | | N/A |
| | Maximum radiation (pA/kg) : | | N/A |
| 10.6 | Protection against acoustic energy sources | | N/A |
| 10.6.1 | General | | N/A |
| 10.6.2 | Classification | | N/A |
| | Acoustic output, dB(A)..... | | N/A |
| | Output voltage, unweighted r.m.s..... | | N/A |
| 10.6.4 | Protection of persons | | N/A |
| | Instructional safeguards..... | | N/A |
| | Equipment safeguard prevent ordinary person to RS2..... | | — |
| | Means to actively inform user of increase sound pressure..... | | — |
| | Equipment safeguard prevent ordinary person to RS2..... | | — |
| 10.6.5 | Requirements for listening devices (headphones, earphones, etc.) | | N/A |
| 10.6.5.1 | Corded passive listening devices with analog input | | N/A |



| EN 62368-1 | | | |
|------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Input voltage with 94 dB(A) L_{Aeq} acoustic pressure output..... | | — |
| 10.6.5.2 | Corded listening devices with digital input | | N/A |
| | Maximum dB(A)..... | | — |
| 10.6.5.3 | Cordless listening device | | N/A |
| | Maximum dB(A)..... | | — |

| B | NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS | N/A |
|----------|--|-----|
| B.2 | Normal Operating Conditions | N/A |
| B.2.1 | General requirements..... | N/A |
| | Audio Amplifiers and equipment with audio amplifiers..... | N/A |
| B.2.3 | Supply voltage and tolerances | N/A |
| B.2.5 | Input test..... | N/A |
| B.3 | Simulated abnormal operating conditions | N/A |
| B.3.1 | General requirements..... | N/A |
| B.3.2 | Covering of ventilation openings | N/A |
| B.3.3 | D.C. mains polarity test | N/A |
| B.3.4 | Setting of voltage selector..... | N/A |
| B.3.5 | Maximum load at output terminals..... | N/A |
| B.3.6 | Reverse battery polarity | N/A |
| B.3.7 | Abnormal operating conditions as specified in Clause E.2. | N/A |
| B.3.8 | Safeguards functional during and after abnormal operating conditions | N/A |
| B.4 | Simulated single fault conditions | N/A |
| B.4.2 | Temperature controlling device open or short-circuited..... | N/A |
| B.4.3 | Motor tests | N/A |
| B.4.3.1 | Motor blocked or rotor locked increasing the internal ambient temperature | -- |
| B.4.4 | Short circuit of functional insulation | N/A |
| B.4.4.1 | Short circuit of clearances for functional insulation | N/A |
| B.4.4.2 | Short circuit of creepage distances for functional insulation | N/A |
| B.4.4.3 | Short circuit of functional insulation on coated printed boards | N/A |



| EN 62368-1 | | | |
|------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| | | | |
|-------|---|--|-----|
| B.4.5 | Short circuit and interruption of electrodes in tubes and semiconductors | | N/A |
| B.4.6 | Short circuit or disconnect of passive components | | N/A |
| B.4.7 | Continuous operation of components | | N/A |
| B.4.8 | Class 1 and Class 2 energy sources within limits during and after single fault conditions | | N/A |
| B.4.9 | Battery charging under single fault conditions.....: | | N/A |

| C | UV RADIATION | | N/A |
|----------|--|--|-----|
| C.1 | Protection of materials in equipment from UV radiation | | N/A |
| C.1.2 | Requirements | | N/A |
| C.1.3 | Test method | | N/A |
| C.2 | UV light conditioning test | | N/A |
| C.2.1 | Test apparatus | | N/A |
| C.2.2 | Mounting of test samples | | N/A |
| C.2.3 | Carbon-arc light-exposure apparatus | | N/A |
| C.2.4 | Xenon-arc light exposure apparatus | | N/A |

| D | TEST GENERATORS | | N/A |
|----------|----------------------------------|--|-----|
| D.1 | Impulse test generators | | N/A |
| D.2 | Antenna interface test generator | | N/A |
| D.3 | Electronic pulse generator | | N/A |

| E | TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS | | N/A |
|----------|--|--|-----|
| E.1 | Audio amplifier normal operating conditions | | N/A |
| | Audio signal voltage (V).....: | | -- |
| | Rated load impedance (Ω) | | -- |
| E.2 | Audio amplifier abnormal operating conditions | | N/A |

| F | EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS | | P |
|----------|---|--|---|
| F.1 | General requirements | See below. | P |
| | Instructions – Language | English | — |
| F.2 | Letter symbols and graphical symbols | | P |
| F.2.1 | Letter symbols according to IEC60027-1 | Letter symbols for quantities and units are complied with IEC 60027-1. | P |



| EN 62368-1 | | | |
|------------|---|--|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| F.2.2 | Graphic symbols IEC, ISO or manufacturer specific | Graphical symbols are complied with IEC 60417, ISO 3864-2, ISO 7000 or ISO 7010. | P |
| F.3 | Equipment markings | | P |
| F.3.1 | Equipment marking locations | The required marking is located on the equipment and is easily visible. | P |
| F.3.2 | Equipment identification markings | See copy of marking plate. | P |
| F.3.2.1 | Manufacturer identification | See copy of marking plate. | — |
| F.3.2.2 | Model identification | See copy of marking plate. | — |
| F.3.3 | Equipment rating markings | See copy of marking plate. | P |
| F.3.3.1 | Equipment with direct connection to mains | | N/A |
| F.3.3.2 | Equipment without direct connection to mains | | P |
| F.3.3.3 | Nature of supply voltage..... | | — |
| F.3.3.4 | Rated voltage..... | Nominal voltage marked. | — |
| F.3.3.4 | Rated frequency..... | | — |
| F.3.3.6 | Rated current or rated power..... | | — |
| F.3.3.7 | Equipment with multiple supply connections | | N/A |
| F.3.4 | Voltage setting device | No voltage setting device. | N/A |
| F.3.5 | Terminals and operating devices | | N/A |
| F.3.5.1 | Mains appliance outlet and socket-outlet markings..... | | N/A |
| F.3.5.2 | Switch position identification marking..... | No switch used. | N/A |
| F.3.5.3 | Replacement fuse identification and rating markings..... | | N/A |
| F.3.5.4 | Replacement battery identification marking..... | | N/A |
| F.3.5.5 | Terminal marking location | | N/A |
| F.3.6 | Equipment markings related to equipment classification | | N/A |
| F.3.6.1 | Class I Equipment | Class III equipment | N/A |
| F.3.6.1.1 | Protective earthing conductor terminal | | N/A |
| F.3.6.1.2 | Neutral conductor terminal | | N/A |
| F.3.6.1.3 | Protective bonding conductor terminals | | N/A |
| F.3.6.2 | Class II equipment (IEC60417-5172) | | N/A |
| F.3.6.2.1 | Class II equipment with or without functional earth | | N/A |
| F.3.6.2.2 | Class II equipment with functional earth terminal marking | | N/A |
| F.3.7 | Equipment IP rating marking | IPX0 | — |
| F.3.8 | External power supply output marking | | N/A |



| EN 62368-1 | | | |
|------------|---|--|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| F.3.9 | Durability, legibility and permanence of marking | | P |
| F.3.10 | Test for permanence of markings | The label was subjected to the permanence of marking test. The label was rubbed with cloth soaked with water for 15 sec. And then again for 15 sec, with the cloth soaked with petroleum spirit. After this test there was no damage to the label. The marking on the label did not fade. There was no curling and lifting of the label edge. After each test, the marking remained legible. | P |
| F.4 | Instructions | | N/A |
| | a) Equipment for use in locations where children not likely to be present - marking | | N/A |
| | b) Instructions given for installation or initial use | | N/A |
| | c) Equipment intended to be fastened in place | | N/A |
| | d) Equipment intended for use only in restricted access area | | N/A |
| | e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1 | | N/A |
| | f) Protective earthing employed as safeguard | | N/A |
| | g) Protective earthing conductor current exceeding ES2 limits | | N/A |
| | h) Symbols used on equipment | | P |
| | i) Permanently connected equipment not provided with all-pole mains switch | | N/A |
| | j) Replaceable components or modules providing safeguard function | | N/A |
| F.5 | Instructional safeguards | | N/A |
| | Where "instructional safeguard" is referenced in the test report it specifies the required elements, location of marking and/or instruction | | N/A |

| | | | |
|------------|---|--|-----|
| G | COMPONENTS | | N/A |
| G.1 | Switches | | N/A |
| G.1.1 | General requirements | | N/A |
| G.1.2 | Ratings, endurance, spacing, maximum load | | N/A |
| G.2 | Relays | | N/A |
| G.2.1 | General requirements | | N/A |
| G.2.2 | Overload test | | N/A |



| EN 62368-1 | | | |
|-------------------|--|-----------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| G.2.3 | Relay controlling connectors supply power | | N/A |
| G.2.4 | Mains relay, modified as stated in G.2 | | N/A |
| G.3 | Protection Devices | | N/A |
| G.3.1 | Thermal cut-offs | | N/A |
| G.3.1.1a) &b) | Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b) | | N/A |
| G.3.1.1c) | Thermal cut-outs tested as part of the equipment as indicated in c) | | N/A |
| G.3.1.2 | Thermal cut-off connections maintained and secure | | N/A |
| G.3.2 | Thermal links | | N/A |
| G.3.2.1a) | Thermal links separately tested with IEC 60691 | No thermal link used. | N/A |
| G.3.2.1b) | Thermal links tested as part of the equipment | | N/A |
| | Aging hours (H)..... : | | — |
| | Single Fault Condition..... : | | — |
| | Test Voltage (V) and Insulation Resistance (Ω).. : | | — |
| G.3.3 | PTC Thermistors | -- | N/A |
| G.3.4 | Overcurrent protection devices | No such device | N/A |
| G.3.5 | Safeguards components not mentioned in G.3.1 to G.3.4 | | N/A |
| G.3.5.1 | Non-resettable devices suitably rated and marking provided | | N/A |
| G.3.5.2 | Single faults conditions..... : | | N/A |
| G.4 | Connectors | | N/A |
| G.4.1 | Spacings | | N/A |
| G.4.2 | Mains connector configuration | | N/A |
| G.4.3 | Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely | | N/A |
| G.5 | Wound Components | | N/A |
| G.5.1 | Wire insulation in wound components..... | | N/A |
| G.5.1.2 a) | Two wires in contact inside wound component, angle between 45° and 90° | | N/A |
| G.5.1.2 b) | Construction subject to routine testing | | N/A |
| G.5.2 | Endurance test on wound components | | N/A |
| G.5.2.1 | General test requirements | | N/A |
| G.5.2.2 | Heat run test | | N/A |
| | Time (s)..... : | | — |



| EN 62368-1 | | | |
|-------------------|--|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Temperature (°C)..... : | | — |
| G.5.2.3 | Wound Components supplied by mains | | N/A |
| G.5.3 | Transformers | | N/A |
| G.5.3.1 | Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1)..... : | | N/A |
| | Position..... : | | — |
| | Method of protection : | | — |
| G.5.3.2 | Insulation | | N/A |
| | Protection from displacement of windings..... : | | — |
| G.5.3.3 | Overload test..... : | | N/A |
| G.5.3.3.1 | Test conditions | | N/A |
| G.5.3.3.2 | Winding Temperatures testing in the unit | | N/A |
| G.5.3.3.3 | Winding Temperatures - Alternative test method | | N/A |
| G.5.4 | Motors | | N/A |
| G.5.4.1 | General requirements | No motor used. | N/A |
| | Position : | | — |
| G.5.4.2 | Test conditions | | N/A |
| G.5.4.3 | Running overload test | | N/A |
| G.5.4.4 | Locked-rotor overload test | | N/A |
| | Test duration (days) : | | — |
| G.5.4.5 | Running overload test for d.c. motors in secondary circuits | | N/A |
| G.5.4.5.2 | Tested in the unit | | N/A |
| | Electric strength test (V)..... : | | — |
| G.5.4.5.3 | Tested on the Bench - Alternative test method; test time (h) : | | N/A |
| | Electric strength test (V)..... : | | — |
| G.5.4.6 | Locked-rotor overload test for d.c. motors in secondary circuits | | N/A |
| G.5.4.6.2 | Tested in the unit | | N/A |
| | Maximum Temperature : | | N/A |
| | Electric strength test (V) : | | N/A |
| G.5.4.6.3 | Tested on the bench - Alternative test method; test time (h)..... : | | N/A |



| EN 62368-1 | | | |
|-------------------|---|-----------------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| | Electric strength test (V)..... : | | N/A |
| G.5.4.7 | Motors with capacitors | | N/A |
| G.5.4.8 | Three-phase motors | | N/A |
| G.5.4.9 | Series motors | | N/A |
| | Operating voltage : | | — |
| G.6 | Wire Insulation | | N/A |
| G.6.1 | General | | N/A |
| G.6.2 | Solvent-based enamel wiring insulation | | N/A |
| G.7 | Mains supply cords | | N/A |
| G.7.1 | General requirements | No such cord provided | N/A |
| | Type..... : | | — |
| | Rated current (A)..... : | | — |
| | Cross-sectional area (mm ²), (AWG)..... : | | — |
| G.7.2 | Compliance and test method | | N/A |
| G.7.3 | Cord anchorages and strain relief for non-detachable power supply cords | | N/A |
| G.7.3.2 | Cord strain relief | | N/A |
| G.7.3.2.1 | Requirements | | N/A |
| | Strain relief test force (N)..... : | | — |
| G.7.3.2.2 | Strain relief mechanism failure | | N/A |
| G.7.3.2.3 | Cord sheath or jacket position, distance (mm)..... : | | — |
| G.7.3.2.4 | Strain relief comprised of polymeric material | | N/A |
| G.7.4 | Cord Entry..... : | | N/A |
| G.7.5 | Non-detachable cord bend protection | | N/A |
| G.7.5.1 | Requirements | | N/A |
| G.7.5.2 | Mass (g) : | | — |
| | Diameter (m)..... : | | — |
| | Temperature (?C)..... : | | — |
| G.7.6 | Supply wiring space | | N/A |
| G.7.6.2 | Stranded wire | No such wire. | N/A |
| G.7.6.2.1 | Test with 8 mm strand | | N/A |
| G.8 | Varistors | | N/A |
| G.8.1 | General requirements | No varistors used | N/A |



| EN 62368-1 | | | |
|-------------|--|--|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| G.8.2 | Safeguard against shock | | N/A |
| G.8.3 | Safeguard against fire | | N/A |
| G.8.3.2 | Varistor overload test..... : | | N/A |
| G.8.3.3 | Temporary overvoltage..... : | | N/A |
| G.9 | Integrated Circuit (IC) Current Limiters | | N/A |
| G.9.1 a) | Manufacturer defines limit at max. 5A. | No IC current limiter provided within the equipment. | N/A |
| G.9.1 b) | Limiters do not have manual operator or reset | | N/A |
| G.9.1 c) | Supply source does not exceed 250 VA : | | -- |
| G.9.1 d) | IC limiter output current (max. 5A)..... : | | -- |
| G.9.1 e) | Manufacturers' defined drift : | | -- |
| G.9.2 | Test Program 1 | | N/A |
| G.9.3 | Test Program 2 | | N/A |
| G.9.4 | Test Program 3 | | N/A |
| G.10 | Resistors | | N/A |
| G.10.1 | General requirements | Resistor bridging functional insulation | N/A |
| G.10.2 | Resistor test | | N/A |
| G.10.3 | Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable | | N/A |
| G.10.3.1 | General requirements | | N/A |
| G.10.3.2 | Voltage surge test | | N/A |
| G.10.3.3 | Impulse test | | N/A |
| G.11 | Capacitor and RC units | | N/A |
| G.11.1 | General requirements | | N/A |
| G.11.2 | Conditioning of capacitors and RC units | | N/A |
| G.11.3 | Rules for selecting capacitors | | N/A |
| G.12 | Optocouplers | | N/A |
| | Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results)..... : | | N/A |
| | Type test voltage Vini : | | — |
| | Routine test voltage, Vini,b : | | — |
| G.13 | Printed boards | | N/A |
| G.13.1 | General requirements | | N/A |
| G.13.2 | Uncoated printed boards | | N/A |
| G.13.3 | Coated printed boards | | N/A |



| EN 62368-1 | | | |
|-------------------|---|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| G.13.4 | Insulation between conductors on the same inner surface | | N/A |
| | Compliance with cemented joint requirements (Specify construction).....: | | — |
| G.13.5 | Insulation between conductors on different surfaces | | N/A |
| | Distance through insulation.....: | | N/A |
| | Number of insulation layers (pcs) : | | — |
| G.13.6 | Tests on coated printed boards | | N/A |
| G.13.6.1 | Sample preparation and preliminary inspection | | N/A |
| G.13.6.2 | Thermal conditioning | | N/A |
| a) | | | |
| G.13.6.2 | Electric strength test | | N/A |
| b) | | | |
| G.13.6.2 | Abrasion resistance test | | N/A |
| c) | | | |
| G.14 | Coating on components terminals | | N/A |
| G.14.1 | Requirements | | N/A |
| G.15 | Liquid filled components | | N/A |
| G.15.1 | General requirements | | N/A |
| G.15.2 | Requirements | | N/A |
| G.15.3 | Compliance and test methods | | N/A |
| G.15.3.1 | Hydrostatic pressure test | | N/A |
| G.15.3.2 | Creep resistance test | | N/A |
| G.15.3.3 | Tubing and fittings compatibility test | | N/A |
| G.15.3.4 | Vibration test | | N/A |
| G.15.3.5 | Thermal cycling test | | N/A |
| G.15.3.6 | Force test | | N/A |
| G.15.4 | Compliance | | N/A |
| G.16 | IC including capacitor discharge function (ICX) | | N/A |
| a) | Humidity treatment in accordance with sc5.4.8 – 120 hours | | N/A |
| b) | Impulse test using circuit 2 with $U_c =$ to transient voltage | | N/A |
| C1) | Application of ac voltage at 110% of rated voltage for 2.5 minutes | | N/A |
| C2) | Test voltage | | — |
| D1) | 10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer | | N/A |



| EN 62368-1 | | | |
|------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |
| D2) | Capacitance | | — |
| D3) | Resistance | | — |

| H | CRITERIA FOR TELEPHONE RINGING SIGNALS | | N/A |
|---------|---|---|-----|
| H.1 | General | No telephone ringing signal generated within the equipment. | N/A |
| H.2 | Method A | | N/A |
| H.3 | Method B | | N/A |
| H.3.1 | Ringling signal | | N/A |
| H.3.1.1 | Frequency (Hz) | | — |
| H.3.1.2 | Voltage (V) | | — |
| H.3.1.3 | Cadence; time (s) and voltage (V) | | — |
| H.3.1.4 | Single fault current (mA):..... | | — |
| H.3.2 | Tripping device and monitoring voltage..... | | N/A |
| H.3.2.1 | Conditions for use of a tripping device or a monitoring voltage complied with | | N/A |
| H.3.2.2 | Tripping device | | N/A |
| H.3.2.3 | Monitoring voltage (V)..... | | — |

| J | INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION | | N/A |
|---|--|--|-----|
| | General requirements | | N/A |

| K | SAFETY INTERLOCKS | | N/A |
|-------|---|-------------------------------|-----|
| K.1 | General requirements | No safety interlock provided. | N/A |
| K.2 | Components of safety interlock safeguard mechanism | | N/A |
| K.3 | Inadvertent change of operating mode | | N/A |
| K.4 | Interlock safeguard override | | N/A |
| K.5 | Fail-safe | | N/A |
| | Compliance..... | | N/A |
| K.6 | Mechanically operated safety interlocks | | N/A |
| K.6.1 | Endurance requirement | | N/A |
| K.6.2 | Compliance and Test method..... | | N/A |
| K.7 | Interlock circuit isolation | | N/A |
| K.7.1 | Separation distance for contact gaps & interlock circuit elements (type and circuit location) | | N/A |
| K.7.2 | Overload test, Current (A)..... | | N/A |



| EN 62368-1 | | | |
|------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| | | | |
|-------|------------------------------|--|-----|
| K.7.3 | Endurance test | | N/A |
| K.7.4 | Electric strength test | | N/A |

| L | DISCONNECT DEVICES | | N/A |
|-----|---------------------------------|--------------------------------------|-----|
| L.1 | General requirements | Not directly connected to the mains. | N/A |
| L.2 | Permanently connected equipment | | N/A |
| L.3 | Parts that remain energized | | N/A |
| L.4 | Single phase equipment | | N/A |
| L.5 | Three-phase equipment | | N/A |
| L.6 | Switches as disconnect devices | | N/A |
| L.7 | Plugs as disconnect devices | | N/A |
| L.8 | Multiple power sources | | N/A |

| M | EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS | | N/A |
|------------|--|--|-----|
| M.1 | General requirements | | N/A |
| M.2 | Safety of batteries and their cells | | N/A |
| M.2.1 | Requirements | | N/A |
| M.2.2 | Compliance and test method (identify method)... : | | -- |
| M.3 | Protection circuits | | N/A |
| M.3.1 | Requirements | | N/A |
| M.3.2 | Tests | | N/A |
| | - Overcharging of a rechargeable battery | | N/A |
| | - Unintentional charging of a non-rechargeable battery | | N/A |
| | - Reverse charging of a rechargeable battery | | N/A |
| | - Excessive discharging rate for any battery | | N/A |
| M.3.3 | Compliance | | N/A |
| M.4 | Additional safeguards for equipment containing secondary lithium battery | | N/A |
| M.4.1 | General | | N/A |
| M.4.2 | Charging safeguards | | N/A |
| M.4.2.1 | Charging operating limits | | N/A |
| M.4.2.2a) | Charging voltage, current and temperature..... : | | -- |
| M.4.2.2 b) | Single faults in charging circuitry..... : | | -- |
| M.4.3 | Fire Enclosure | | N/A |
| M.4.4 | Endurance of equipment containing a secondary lithium battery | | N/A |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|---------|---|-----------------|---------|
| M.4.4.2 | Preparation | | N/A |
| M.4.4.3 | Drop and charge/discharge function tests | | N/A |
| | Drop | | N/A |
| | Charge | | N/A |
| | Discharge | | N/A |
| M.4.4.4 | Charge-discharge cycle test | | N/A |
| M.4.4.5 | Result of charge-discharge cycle test | | N/A |
| M.5 | Risk of burn due to short circuit during carrying | | N/A |
| M.5.1 | Requirement | | N/A |
| M.5.2 | Compliance and Test Method (Test of P.2.3) | | N/A |
| M.6 | Prevention of short circuits and protection from other effects of electric current | | N/A |
| M.6.1 | Short circuits | | N/A |
| M.6.1.1 | General requirements | | N/A |
| M.6.1.2 | Test method to simulate an internal fault | | N/A |
| M.6.1.3 | Compliance (Specify M.6.1.2 or alternative method) | | -- |
| M.6.2 | Leakage current (mA) | | -- |
| M.7 | Risk of explosion from lead acid and NiCd batteries | | N/A |
| M.7.1 | Ventilation preventing explosive gas concentration | | N/A |
| M.7.2 | Compliance and test method | | N/A |
| M.8 | Protection against internal ignition from external spark sources of lead acid batteries | | N/A |
| M.8.1 | General requirements | | N/A |
| M.8.2 | Test method | | N/A |
| M.8.2.1 | General requirements | | N/A |
| M.8.2.2 | Estimation of hypothetical volume Vz (m ³ /s)..... | | -- |
| M.8.2.3 | Correction factors..... | | -- |
| M.8.2.4 | Calculation of distance d (mm) | | -- |
| M.9 | Preventing electrolyte spillage | | N/A |
| M.9.1 | Protection from electrolyte spillage | | N/A |
| M.9.2 | Tray for preventing electrolyte spillage | | N/A |
| M.10 | Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing) | | N/A |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|----------|---|-----------------------|---------|
| N | ELECTROCHEMICAL POTENTIALS | | N/A |
| | Metal(s) used..... | No risk of corrosion. | -- |
| O | MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES | | N/A |
| | Figures O.1 to O.20 of this Annex applied..... | | — |
| P | SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS | | N/A |
| P.1 | General requirements | | N/A |
| P.2.2 | Safeguards against entry of foreign object | | N/A |
| | Location and Dimensions (mm) | | — |
| P.2.3 | Safeguard against the consequences of entry of foreign object | | N/A |
| P.2.3.1 | Safeguards against the entry of a foreign object | | N/A |
| | Openings in transportable equipment | | N/A |
| | Transportable equipment with metalized plastic parts..... | | N/A |
| P.2.3.2 | Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard) | | N/A |
| P.3 | Safeguards against spillage of internal liquids | No such liquids. | N/A |
| P.3.1 | General requirements | | N/A |
| P.3.2 | Determination of spillage consequences | | N/A |
| P.3.3 | Spillage safeguards | | N/A |
| P.3.4 | Safeguards effectiveness | | N/A |
| P.4 | Metallized coatings and adhesive securing parts | No such construction. | N/A |
| P.4.2 a) | Conditioning testing | | N/A |
| | Tc (°C)..... | | — |
| | Tr (°C)..... | | — |
| | Ta (°C)..... | | — |
| P.4.2 b) | Abrasion testing | | N/A |
| P.4.2 c) | Mechanical strength testing..... | | N/A |
| Q | CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING | | N/A |
| Q.1 | Limited power sources | | N/A |
| Q.1.1 a) | Inherently limited output | | N/A |
| Q.1.1 b) | Impedance limited output | | N/A |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|----------|---|-----------------|---------|
| | - Regulating network limited output under normal operating and simulated single fault condition | | N/A |
| Q.1.1 c) | Overcurrent protective device limited output | | N/A |
| Q.1.1 d) | IC current limiter complying with G.9 | | N/A |
| Q.1.2 | Compliance and test method | | N/A |
| Q.2 | Test for external circuits – paired conductor cable | | N/A |
| | Maximum output current (A) : | | -- |
| | Current limiting method.....: | | -- |

| R | LIMITED SHORT CIRCUIT TEST | | N/A |
|----------|---|------------------------|-----|
| R.1 | General requirements | No such consideration. | N/A |
| R.2 | Determination of the overcurrent protective device and circuit | | N/A |
| R.3 | Test method Supply voltage (V) and short-circuit current (A). : | | N/A |

| S | TESTS FOR RESISTANCE TO HEAT AND FIRE | | N/A |
|----------|--|---------------------------------|-----|
| S.1 | Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W | To be evaluated in final system | N/A |
| | Samples, material.....: | | — |
| | Wall thickness (mm).....: | | — |
| | Conditioning (°C).....: | | — |
| | Test flame according to IEC 60695-11-5 with conditions as set out | | N/A |
| | - Material not consumed completely | | N/A |
| | - Material extinguishes within 30s | | N/A |
| | - No burning of layer or wrapping tissue | | N/A |
| S.2 | Flammability test for fire enclosure and fire barrier integrity | | N/A |
| | Samples, material.....: | | — |
| | Wall thickness (mm).....: | | — |
| | Conditioning (°C).....: | | — |
| | Test flame according to IEC 60695-11-5 with conditions as set out | | N/A |
| | Test specimen does not show any additional hole | | N/A |
| S.3 | Flammability test for the bottom of a fire enclosure | | N/A |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--|-----------------|---------|
| | Samples, material.....: | | — |
| | Wall thickness (mm).....: | | — |
| | Cheesecloth did not ignite | | N/A |
| S.4 | Flammability classification of materials | | N/A |
| S.5 | Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W | | N/A |
| | Samples, material.....: | | — |
| | Wall thickness (mm).....: | | — |
| | Conditioning (test condition), (°C).....: | | — |
| | Test flame according to IEC 60695-11-20 with conditions as set out | | N/A |
| | After every test specimen was not consumed completely | | N/A |
| | After fifth flame application, flame extinguished within 1 min | | N/A |

| T | MECHANICAL STRENGTH TESTS | P |
|----------|--------------------------------------|----------|
| T.1 | General requirements | N/A |
| T.2 | Steady force test, 10 N | N/A |
| T.3 | Steady force test, 30 N | N/A |
| T.4 | Steady force test, 100 N | P |
| T.5 | Steady force test, 250 N | N/A |
| T.6 | Enclosure impact test | N/A |
| | Fall test | N/A |
| | Swing test | N/A |
| T.7 | Drop test | P |
| T.8 | Stress relief test..... | N/A |
| T.9 | Impact Test (glass) | N/A |
| T.9.1 | General requirements | N/A |
| T.9.2 | Impact test and compliance | N/A |
| | Impact energy (J)..... | — |
| | Height (m)..... | — |
| T.10 | Glass fragmentation test..... | N/A |
| T.11 | Test for telescoping or rod antennas | N/A |
| | Torque value (Nm) | — |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| | | | |
|----------|---|------------------|-----|
| U | MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION | | N/A |
| U.1 | General requirements | No CRT provided. | N/A |
| U.2 | Compliance and test method for non-intrinsically protected CRTs | | N/A |
| U.3 | Protective Screen.....: | | N/A |

| | | | |
|----------|---|--|-----|
| V | DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES) | | N/A |
| V.1 | Accessible parts of equipment | Built-in battery pack, to be evaluated in final system | N/A |
| V.2 | Accessible part criterion | | N/A |



| EN 62368-1 | | | |
|------------|--------------------|-----------------|---------|
| Clause | Requirement + Test | Result - Remark | Verdict |

| 5.2 | | | TABLE: Classification of electrical energy sources | | | | P |
|----------------------------|-------------------------------------|--------------------|---|--------|--------------------|-------------------------------|----------|
| Supply Voltage | Location (e.g. circuit designation) | Test conditions | Parameters | | | | ES Class |
| | | | U (V) | I (mA) | Type ¹⁾ | Additional Info ²⁾ | |
| 5VDC | Output terminal | Normal | 4.98V | -- | -- | -- | ES1 |
| | | Abnormal | -- | -- | -- | -- | |
| | | Single fault-SC/OC | -- | -- | -- | -- | |
| Supplementary information: | | | | | | | |

| | | | | | | | |
|---|------------|-----------|--|-----------|--------|------------------------|------------------------|
| 5.4.1.4, 9.3, B.1.5, B.2.6 | | | TABLE: Temperature measurements | | | | P |
| Supply voltage (V).....: | | | 5VDC | | — | | |
| Ambient temperature during test T_{amb} (°C).....: | | | 25 | | — | | |
| Maximum measured temperature T of part/at: | | | | | | | Allowed T_{max} (°C) |
| Enclosure | | | 35.6 | | 46 | | |
| Battery | | | 34.8 | | -- | | |
| Ambient | | | 25.2 | | -- | | |
| Temperature T of winding: | t_1 (°C) | R_1 (Ω) | t_2 (°C) | R_2 (Ω) | T (°C) | Allowed T_{max} (°C) | Insulation class |
| | | | | | | | |
| Supplementary information: playing a 1KHz sine wave signal to max. volume | | | | | | | |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| 5.4.1.8 | TABLE: Working voltage measurement | | | | N/A |
|----------|------------------------------------|------------------|-----------------|----------|-----|
| Location | RMS voltage (V) | Peak voltage (V) | Frequency (kHz) | Comments | |
| | | | | -- | |

| 5.4.1.10.2 | TABLE: Vicat softening temperature of thermoplastics | | | | N/A |
|----------------------------|--|----------------|------------------|--|-----|
| Method..... : | | | ISO 306 / B50 | | — |
| Object/ Part No./Material | Manufacturer/trademark | Thickness (mm) | T softening (°C) | | |
| | | | | | |
| Supplementary information: | | | | | |

| 5.4.1.10.3 | TABLE: Ball pressure test of thermoplastics | | | | N/A |
|---|---|----------------|-----------------------|--------------------------|-----|
| Allowed impression diameter (mm)..... : | | | ≤ 2 mm | | — |
| Object/Part No./Material | Manufacturer/trademark | Thickness (mm) | Test temperature (°C) | Impression diameter (mm) | |
| - | | - | - | - | |
| Supplementary information: | | | | | |

| 5.4.2, 5.4.3 | TABLE: Minimum Clearances/Creepage distance | | | | | | | N/A |
|---|---|----------------------|--------------------------|------------------|---------|------------------------|------------------|---------|
| Clearance (cl) and creepage distance (cr) at/of/between: | U _p (V) | U _{rms} (V) | Freq ¹⁾ (kHz) | Required cl (mm) | cl (mm) | E.S. ²⁾ (V) | Required cr (mm) | cr (mm) |
| | | | | | | | | |
| Supplementary information: | | | | | | | | |
| 1) Only for frequency above 30 kHz | | | | | | | | |
| 2) Complete Electric Strength voltage (E.S. (V) when 5.4.2.4 applied) | | | | | | | | |

| 5.4.4.2 | Minimum distance through insulation | | | | N/A |
|---|-------------------------------------|------------|-------------------|-------------------|-----|
| Distance through insulation (DTI) at/of | Peak voltage (V) | Insulation | Required DTI (mm) | Measured DTI (mm) | |
| | | | | | |
| Supplementary information: | | | | | |

**EN 62368-1**

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| 5.4.4.9 | TABLE: Solid insulation at frequencies >30 kHz | | | | | | N/A |
|----------------------------|--|-----------------|-------|--------------------|------------|----------------|-----|
| Insulation material | E_P | Frequency (kHz) | K_R | Thickness d (mm) | Insulation | V_{PW} (Vpk) | |
| | | | | | | | |
| Supplementary information: | | | | | | | |

| 5.4.9 | TABLE: Electric strength tests | | | N/A |
|-------------------------------|--|------------------|--------------------|-----|
| Test voltage applied between: | Voltage shape (Surge, Impulse, AC, DC, etc.) | Test voltage (V) | Breakdown Yes / No | |
| - | - | - | - | |

| 5.5.2.2 | TABLE: Stored discharge on capacitors | | | | | N/A |
|---|---------------------------------------|---|-----------------|------------------------|----------|-----|
| Location | Supply voltage (V) | Operating and fault condition ¹⁾ | Switch position | Measured voltage (Vpk) | ES Class | |
| | | | | | | |
| Supplementary information: | | | | | | |
| X-capacitors installed for testing: | | | | | | |
| <input type="checkbox"/> bleeding resistor rating: | | | | | | |
| <input type="checkbox"/> ICX: | | | | | | |
| 1) Normal operating condition (e.g., normal operation, or open fuse), SC= short circuit, OC= open circuit | | | | | | |

| 5.6.6 | TABLE: Resistance of protective conductors and terminations | | | | N/A |
|----------------------------|---|----------------|------------------|-------------------------|-----|
| Location | Test current (A) | Duration (min) | Voltage drop (V) | Resistance (Ω) | |
| | | | | | |
| Supplementary information: | | | | | |

| 5.7.4 | TABLE: Unearthed accessible parts | | | | | N/A |
|---|-----------------------------------|--------------------|-----------------------------------|-----------------------------------|------------|----------|
| Location | Operating and fault conditions | Supply Voltage (V) | Parameters | | | ES class |
| | | | Voltage (V_{rms} or V_{pk}) | Current (A_{rms} or A_{pk}) | Freq. (Hz) | |
| | | | | | | |
| Supplementary information: | | | | | | |
| Abbreviation: SC= short circuit; OC= open circuit | | | | | | |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| | | | | |
|---------------------------------|--|--------------------|---------|-----|
| 5.7.5 | TABLE: Earthed accessible conductive part | | | N/A |
| Supply voltage (V).....: | | | | — |
| Phase(s) | <input type="checkbox"/> Single Phase; <input type="checkbox"/> Three Phase: <input type="checkbox"/> Delta <input type="checkbox"/> Wye | | | |
| Power Distribution System | <input type="checkbox"/> TN <input type="checkbox"/> TT <input type="checkbox"/> IT | | | |
| Location | Fault Condition No in IEC 60990 clause 6.2.2 | Touch current (mA) | Comment | |
| Supplementary Information: | | | | |

| | | | | | | |
|---|--|-------------------------------|----------|--------------------------|-------------------|----------|
| 5.8 | TABLE: Backfeed safeguard in battery backed up supplies | | | | | N/A |
| Location | Supply voltage (V) | Operating and fault condition | Time (s) | Open-circuit voltage (V) | Touch current (A) | ES Class |
| Supplementary information: Abbreviation: SC= short circuit, OC= open circuit | | | | | | |

| | | | | | | |
|--|--|-------------|-------------|------------------------------|----------|----------|
| 6.2.2 | TABLE: Power source circuit classifications | | | | | N/A |
| Location | Operating and fault condition | Voltage (V) | Current (A) | Max. Power ¹⁾ (W) | Time (S) | PS class |
| Supplementary information: Abbreviation: SC= short circuit; OC= open circuit 1) Measured after 3 s for PS1 and measured after 5 s for PS2 and PS3. | | | | | | |

| | | | | | |
|----------------------------|---|----------------------------|------------------|----------------------|-----|
| 6.2.3.1 | TABLE: Determination of Arcing PIS | | | | N/A |
| Location | Open circuit voltage after 3 s (Vpk) | Measured r.m.s current (A) | Calculated value | Arcing PIS? Yes / No | |
| Supplementary information: | | | | | |

| | | | | |
|---|--|---------------------|-------------------------|-----|
| 6.2.3.2 | TABLE: Determination of resistive PIS | | | N/A |
| Location | Operating and fault condition | Dissipate power (W) | Resistive PIS? Yes / No | |
| Supplementary information: Abbreviation: SC= short circuit; OC= open circuit | | | | |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| | | | | | |
|----------------------------|----------------------------------|------------------|-------------------------------------|------------------------------------|-----|
| 8.5.5 | TABLE: High pressure lamp | | | | N/A |
| Lamp manufacturer | Lamp type | Explosion method | Longest axis of glass particle (mm) | Particle found beyond 1 m Yes / No | |
| | | | | | |
| Supplementary information: | | | | | |

| | | | | | | | | | |
|---|--|--------------|----------------------------------|--------------|---------------------------------------|--------------|---------------------------------------|--------------|-----|
| 9.6 | TABLE: Temperature measurements for wireless power transmitters | | | | | | | | N/A |
| Supply voltage (V)..... : | | | | | | | | | — |
| Max. transmit power of transmitter (W)..... : | | | | | | | | | — |
| Foreign objects | w/o receiver and direct contact | | with receiver and direct contact | | with receiver and at distance of 2 mm | | with receiver and at distance of 5 mm | | |
| | Object (°C) | Ambient (°C) | Object (°C) | Ambient (°C) | Object (°C) | Ambient (°C) | Object (°C) | Ambient (°C) | |
| | | | | | | | | | |
| Supplementary information: | | | | | | | | | |

| | | | | | | | | | |
|----------------------------|--------------------------|-------|-------------|-------|-------------|---------|------------|------------------|-----|
| B.2.5 | TABLE: Input test | | | | | | | | N/A |
| U (V) | Hz | I (A) | I rated (A) | P (W) | P rated (W) | Fuse No | I fuse (A) | Condition/status | |
| | | | | | | | | | |
| Supplementary information: | | | | | | | | | |

| | | | | | | | | |
|---|--|--------------------|-----------|----------|------------------|-------------|------|-----|
| B.3, B.4 | TABLE: Abnormal operating and fault condition tests | | | | | | | N/A |
| Ambient temperature T _{amb} (°C)..... : | | | | | | | 23.5 | — |
| Power source for EUT: Manufacturer, model/type, outputrating... : | | | | | | | | — |
| Component No. | Condition | Supply voltage (V) | Test time | Fuse no. | Fuse current (A) | Observation | | |
| | | | | | | | | |
| Supplementary information: | | | | | | | | |

| | | | | | | | | |
|--|---|--|--|------------------------|-------------|--|--|-----|
| M.3 | TABLE: Protection circuits for batteries provided within the equipment | | | | | | | N/A |
| Is it possible to install the battery in a reverse polarity position?..... : | | | | | | | | — |
| Equipment Specification | Charging | | | | | | | |
| | Voltage (V) | | | | Current (A) | | | |
| | | | | | | | | |
| Manufacturer/type | Battery specification | | | | | | | |
| | Non-rechargeable batteries | | | Rechargeable batteries | | | | |



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| | Discharging current (A) | Unintentional charging current (A) | Charging | | Discharging current (A) | Reverse charging current (A) |
|--|-------------------------|------------------------------------|-------------|-------------|-------------------------|------------------------------|
| | | | Voltage (V) | Current (A) | | |
| | | | | | | |

Note: The tests of M.3.2 are applicable only when above appropriate data is not available.

Specified battery temperature (°C).....:

| Component No. | Fault condition | Charge/discharge mode | Test time | Temp. (°C) | Current (A) | Voltage (V) | Observation |
|---------------|-----------------|-----------------------|-----------|------------|-------------|-------------|-------------|
| | | | | | | | |

Supplementary information:

Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal.

| M.4.2 | TABLE: Charging safeguards for equipment containing a secondary lithium battery | | | | | | N/A |
|---------------------------|--|----------------------|----------------------|------------|-------------|--|------------|
| | Maximum specified charging voltage (V).....: | | | | | | — |
| | Maximum specified charging current (A) | | | | | | — |
| | Highest specified charging temperature (°C) | | | | | | |
| | Lowest specified charging temperature (°C) | | | | | | |
| Battery manufacturer/type | Operating and fault condition | Measurement | | | Observation | | |
| | | Charging voltage (V) | Charging current (A) | Temp. (°C) | | | |
| | | | | | | | |

Supplementary information:
Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC= maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature

| Q.1 | TABLE: Circuits intended for interconnection with building wiring (LPS) | | | | | | N/A |
|----------------|--|---------------------|----------|---------------------|-------|--------|------------|
| Output Circuit | Condition | U _{oc} (V) | Time (s) | I _{sc} (A) | | S (VA) | |
| | | | | Meas. | Limit | Meas. | Limit |
| | | | | | | | |

Supplementary Information:

**EN 62368-1**

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| | | | |
|---------------------------|---------------------------------|--|---|
| T.2, T.3, T.4, T.5 | TABLE: Steady force test | | P |
|---------------------------|---------------------------------|--|---|

| Part/Location | Material | Thickness (mm) | Probe | Force (N) | Test Duration (s) | Observation |
|------------------------------|----------|----------------|-------|-----------|---|------------------------------|
| Enclosure near battery (T.4) | / | 3.0mm | 100 | 5 | Enclosure remained intact, no crack/opening developed | Enclosure near battery (T.4) |

Supplementary information:

| | | | |
|-----------------|---------------------------|--|-----|
| T.6, T.9 | TABLE: Impact test | | N/A |
|-----------------|---------------------------|--|-----|

| Location/part | Material | Thickness (mm) | Height (mm) | Observation |
|---------------|----------|----------------|-------------|-------------|
| | | | | |

Supplementary information:

The adaptor is a director plug-in equipment, which is specified in 4.4.4.3.

| | | | |
|------------|-------------------------|--|---|
| T.7 | TABLE: Drop test | | P |
|------------|-------------------------|--|---|

| Location/part | Material | Thickness (mm) | Height (mm) | Observation |
|--------------------------|----------|----------------|-------------|---------------------------|
| External enclosure (top) | / | 3.0mm | 1000 | Enclosure remained intact |

Supplementary information:

| | | | |
|------------|----------------------------------|--|-----|
| T.8 | TABLE: Stress relief test | | N/A |
|------------|----------------------------------|--|-----|

| Location/Part | Material | Thickness (mm) | Oven Temperature (°C) | Duration (h) | Observation |
|---------------|----------|----------------|-----------------------|--------------|-------------|
| | | | | | |

Supplementary information:

| | | | |
|----------|---|--|-----|
| X | TABLE: Alternative method for determining minimum clearances distances | | N/A |
|----------|---|--|-----|

| Clearance distanced between: | Peak of working voltage (V) | Required cl (mm) | Measured cl (mm) |
|------------------------------|-----------------------------|------------------|------------------|
| | | | |

Supplementary information:



EN 62368-1

| Clause | Requirement + Test | Result - Remark | Verdict |
|--------|--------------------|-----------------|---------|
|--------|--------------------|-----------------|---------|

| 4.1.2 | TABLE: Critical components information | | | | | P |
|----------------------------|--|--------------|----------------|----------|--|---|
| Object / part No. | Manufacturer/ trademark | Type / model | Technical data | Standard | Mark(s) of conformity ¹⁾ | |
| PCB | GUANG DONG HONG TAI ELECTRONIC INC CO LTD | HH-1 | V-0, 130°C | UL 796 | Testes with Appliance | |
| silica gel | / | / | / | / | Testes with Appliance | |
| Supplementary information: | | | | | | |

EUT PHOTO



FIGURE 1



FIGURE 2

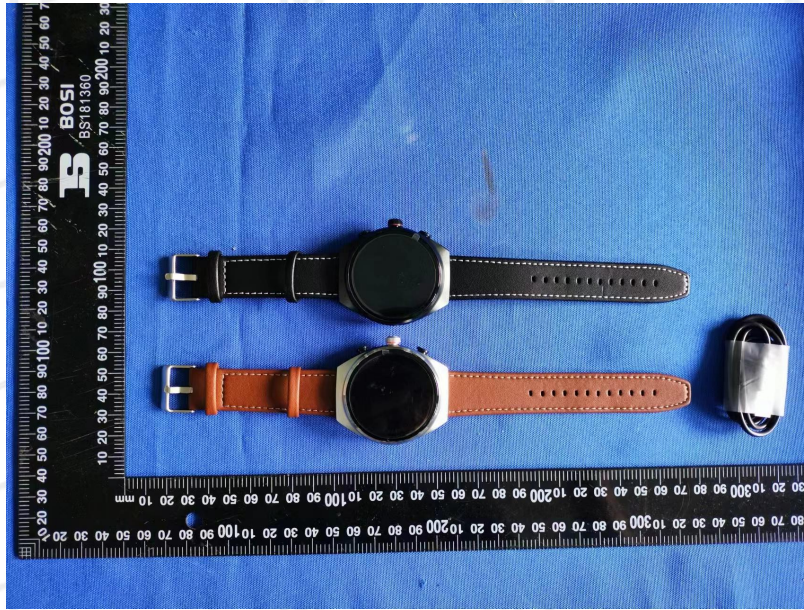


FIGURE 3



FIGURE 4

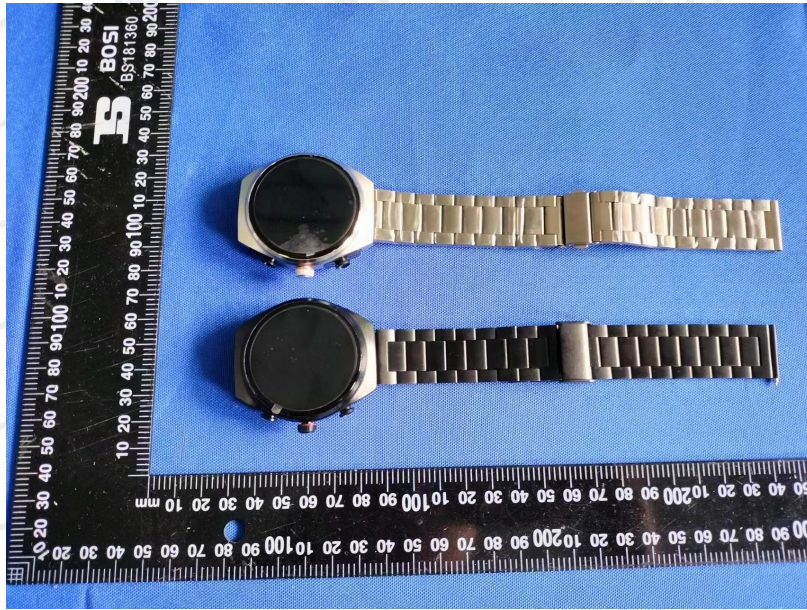


FIGURE 5

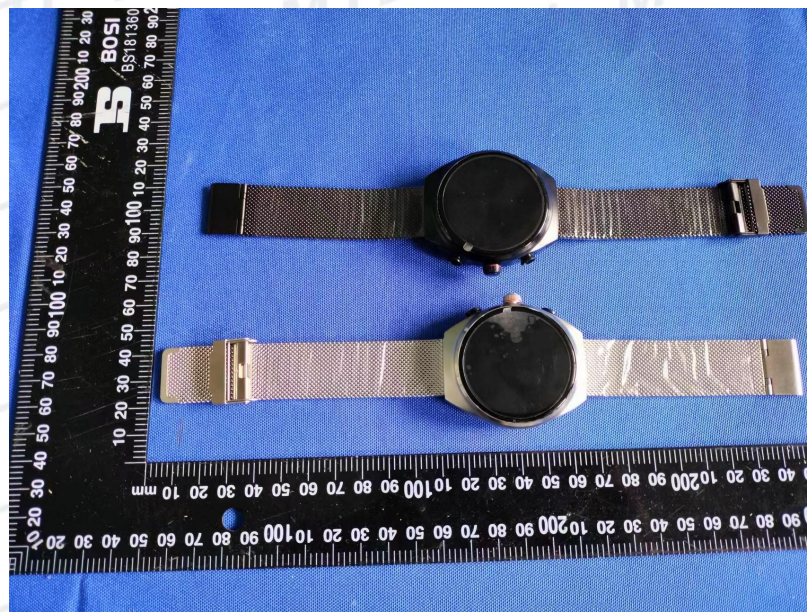


FIGURE 6



FIGURE 7



FIGURE 8

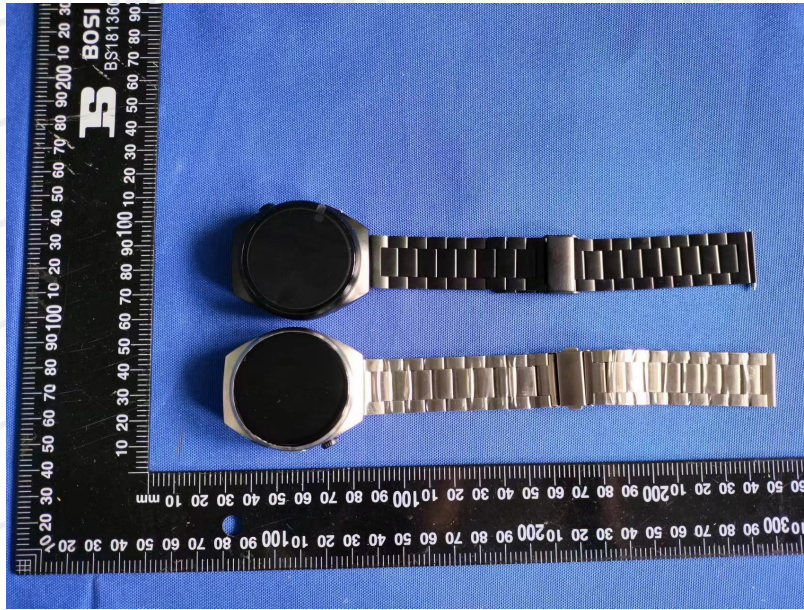


FIGURE 9



FIGURE 10

End of Report