


20.

KEMTRON KTL 48 Series

Shaker Screen Replacement

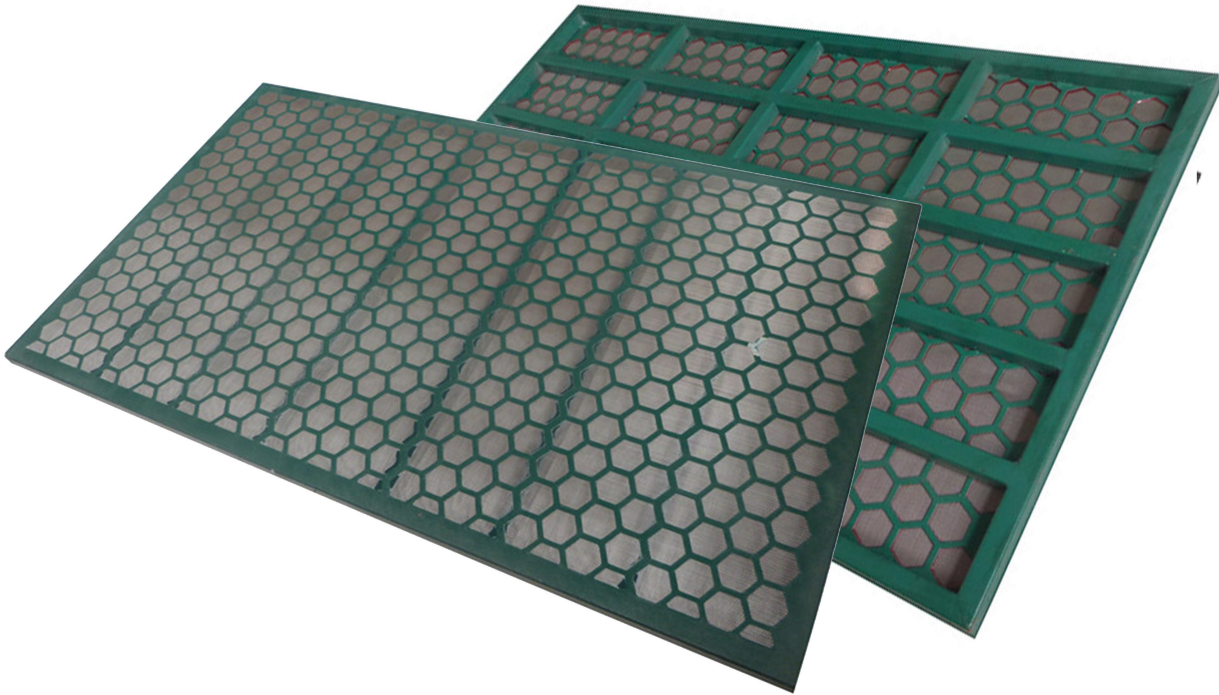



Compatible shale shakers

- KEMTRON KTL 48 shale shaker.
- KTL-448 AG four panel shaker.
- KTL-48 STD three panel shaker.
- KTL-48D three panel shaker.
- KTL-48 SS three panel shaker
- KEMTRON 48 series desander.
- KEMTRON 48 series desilter.




Technical Data

- **Model No.:** FT-KTL-48.
- **Material:** Stainless steel 304/316/316 L.
- **Frame Material:** Q235 steel.
- **Standard:** API RP 13C.
- **API RP 13C Designation:** API 20 – API 230.
- **Series:** XL, XR.
- **Warranty Period:** 1 year.
- **Working Life:** 240–360 hours.

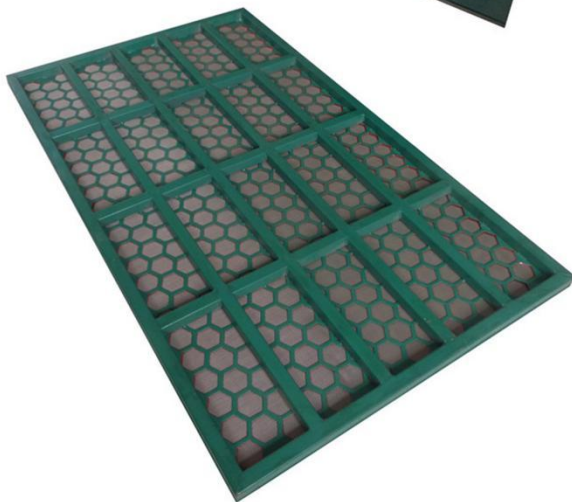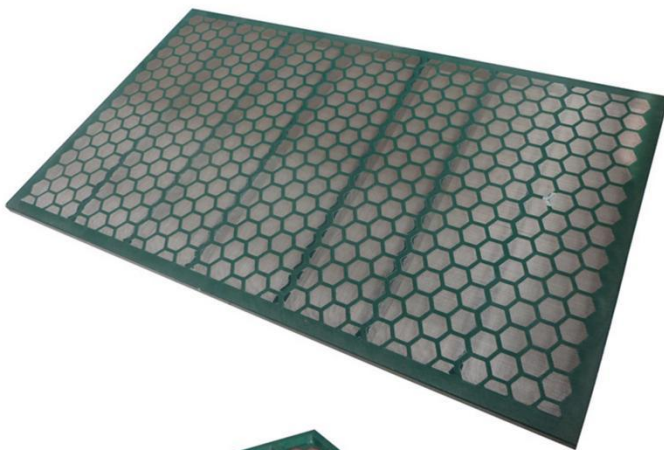

SS 304/316 Wire Mesh Cloth

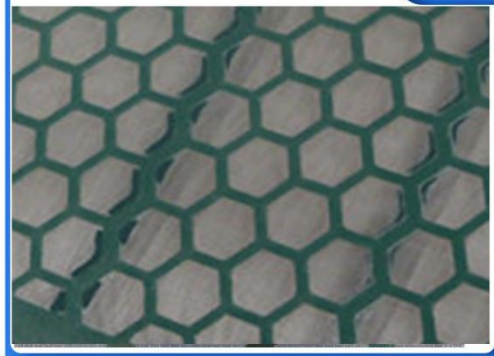

Ribbed Back Supporting Frame





FT-KTL-48-A325T



Technical Data

Screen Designation	API RP 13C Designation	Conductance Number	D100 Separation (microns)	Non-Blank Area (sq.ft)
FT-KLT-48-A400	API 400	0.31	36.8	5.31
FT-KLT-48-A325	API 325	0.44	47.6	5.31
FT-KLT-48-A270	API 270	0.45	54	5.31
FT-KLT-48-A230	API 230	0.63	69	5.31
FT-KLT-48-A200	API 200	0.68	73.8	5.31
FT-KLT-48-A170	API 170	0.82	91	5.31
FT-KLT-48-A140	API 140	1.07	105	5.31
FT-KLT-48-A120	API 120	1.54	122	5.31
FT-KLT-48-A100	API 100	1.72	144	5.31
FT-KLT-48-A80	API 80	1.83	175	5.31
FT-KLT-48-A70	API 70	2.12	209	5.31
FT-KLT-48-A60	API 60	2.74	278	5.31
FT-KLT-48-A45	API 45	6.78	376	5.31
FT-KLT-48-A35	API 35	8.02	519	5.31
FT-KLT-48-A25	API 25	8.26	750	5.31
FT-KLT-48-A20	API 20	9.07	863	5.31

* D100: Particles this size and larger will normally be discarded.

* API: Corresponding API sieve equivalent as per API RP 13C.

* Conductance No.: This represents the ease with which a liquid can flow through the screen. Larger values represent higher volume handling.